


LED DOWNLIGHT



LDDF SERIES

3 years warranty



Key Features

- Low profile suitable for shallow ceiling voids
- Triac dimming compatible
- 3 Selectable CCT: 3000K / 4000K / 6000K
- Energy savings of up to 52% compared to compact fluorescent system
- Vibration-resistant
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- CE Marking, EMC safety compliance

ABS

Application

Cabins, Passageways, Galleys, Meeting rooms

Material


Powder coated aluminium alloy body and heatsink with PMMA diffuser
Protect against marine saltwater corrosion

Protection Class

IP44

Weight

0.9Kg

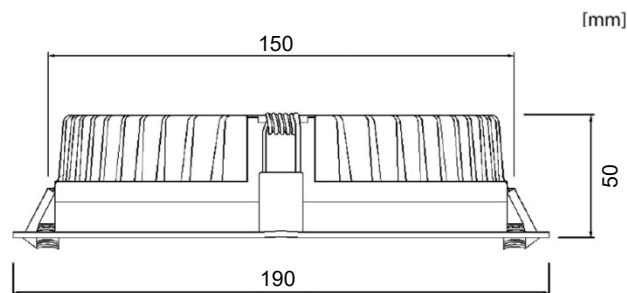

TECHNICAL SPECIFICATIONS

IP 44



Ideal Replacement:  42W CFL

BH Code	IMPA No.	Voltage	Power	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LDDF20XKA22W	-	220V - 240V AC	20W	3000K/4000K/6000K Selectable	90°	-20°C ~ +40°C	1700lm