

EUC602

Product Features


- Amplify driving ability of 0-10V signal, or convert PWM, passive signal to 0-10V signal
- Support active and passive 0-10V color temperature (adjustable resistance) and PWM signal input
- High quality amplifier, output current of 150mA
- Used for the situation that the main controller's driver ability isn't enough



Technical Parameters


| Model | | EUC602 |
|--------|-------------------|---|
| Output | Accuracy Channels | 2 |
| | Voltage | 0-10VDC |
| | Current | 150mA |
| Input | Voltage | 200-240VAC |
| | Signal | 0-10V active signal, resistance/passive signal, or PWM signal |
| Others | Dimension | 185*42.5*28.5 mm (L*W*H) |
| | Packing Size | 430*306*168 mm(L*W*H),50pcs/6.2kg/Carton |
| | G.W | 115g |
| | Working temp | -20℃~50℃ |
| | Relative humidity | 20~90% RH |

Wiring Diagram

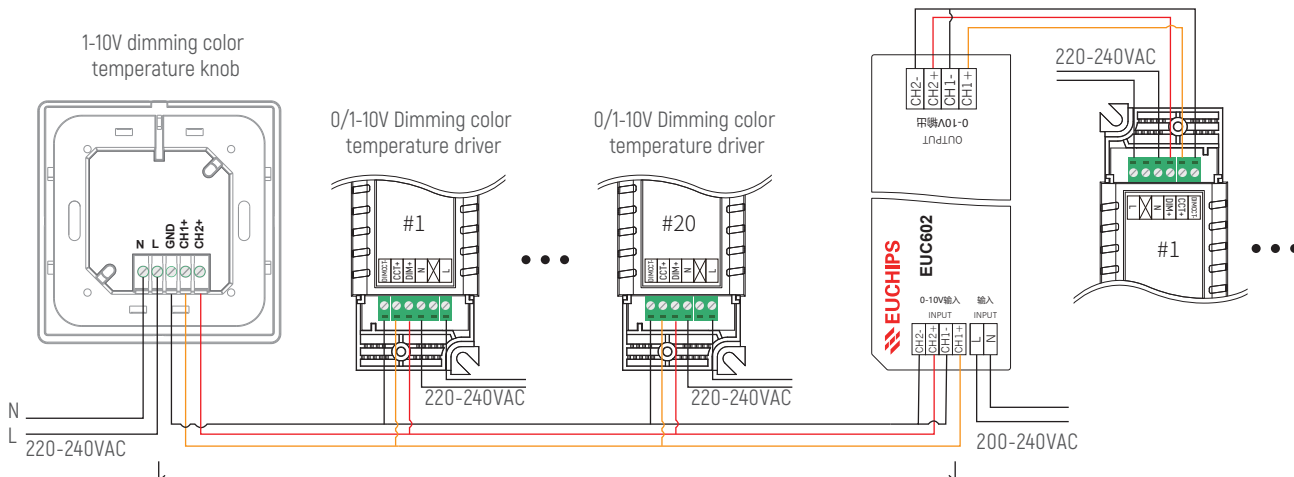

50m requires an additional signal amplifier
(Within 50m, there should be no more than 20 drivers,
and if there are more than 20 drivers, signal amplifiers need to be added)

Dimension(mm)

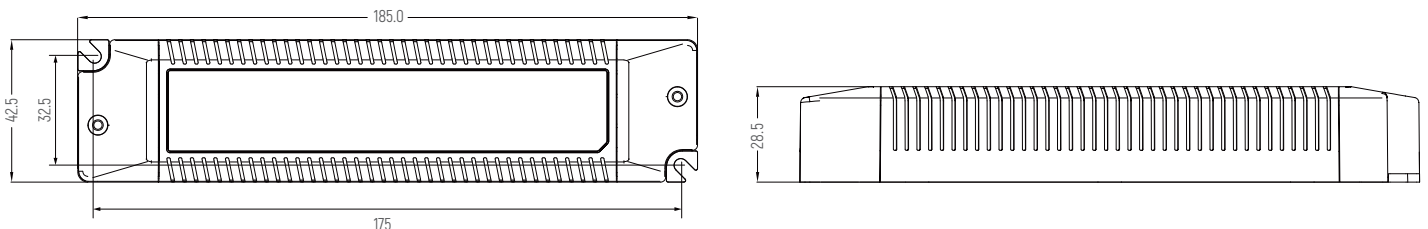

EUC602

产品特点


- 用于0-10V信号驱动能力的放大、PWM、无源信号的转换
- 支持有源、无源两路0-10V调色温(可调电阻)及PWM信号输入
- 采用高品质的放大器件, 输出驱动能力可达150mA
- 主要用于主控制器输出驱动能力不足の場合



技术参数

| 型号 | | EUC602 |
|----|------|--------------------------------------|
| 输出 | 通道数 | 2 |
| | 电压 | 0-10VDC |
| | 电流 | 150mA |
| 输入 | 电压 | 200-240VAC |
| | 输入信号 | 0-10V有源信号、电阻/无源信号、PWM信号 |
| 其他 | 产品尺寸 | 185*42.5*28.5mm (长*宽*高) |
| | 包装尺寸 | 430*306*168mm (长*宽*高), 50pcs/6.2kg/箱 |
| | 毛重 | 115g |
| | 工作温度 | -20°C~50°C |
| | 相对湿度 | 20~90% RH |

接线图

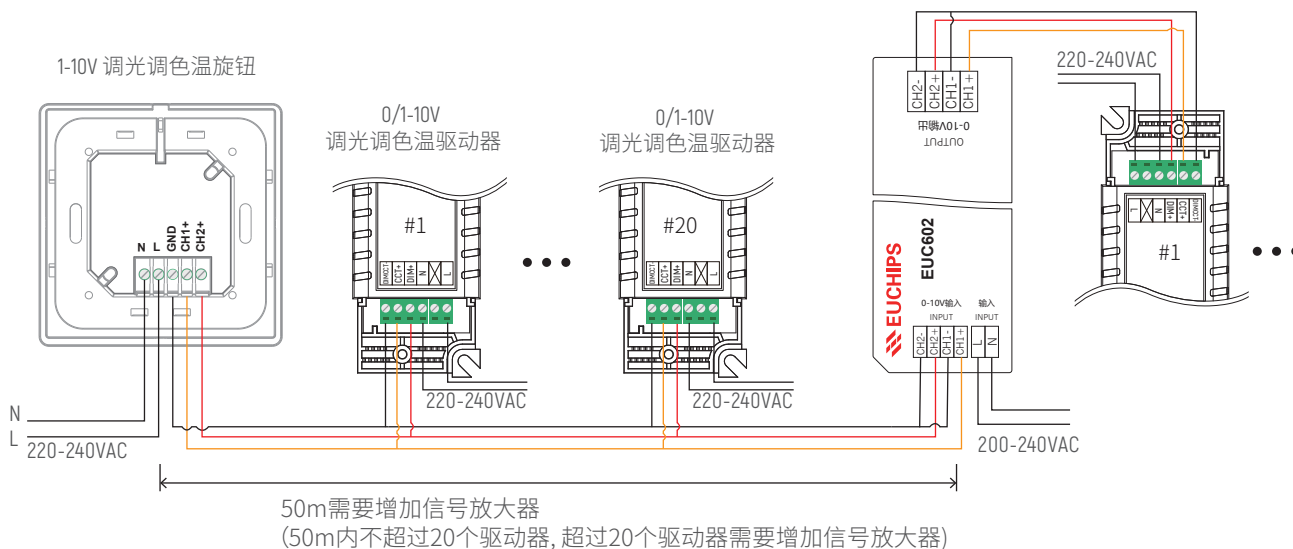

外观尺寸 (mm)

