


Electronic Superimposed Ignitors for HS and HI Lamps 600 to 1000 W

Standard version or with automatic switch-off
for high pressure sodium lamps (HS)
and metal halide lamps (HI)
Phasing of the ignition voltage:
60–90 °el and 240–270 °el
Max. permitted casing temperature: 105 °C
Fastening: male nipple with pre-assembled
washer and nut
For luminaires of protection class I and II
Terminal: 4 mm²



PC casing

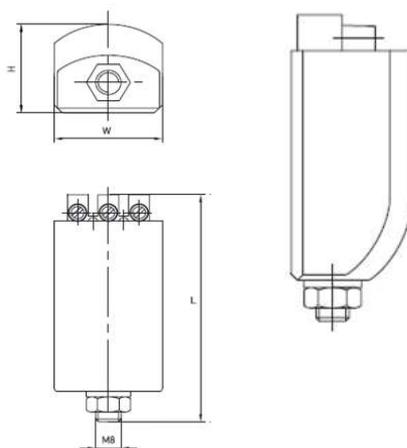

Type	Ref. No.	Voltage AC 50–60 Hz V	Max. lamp current A	Internal loss W	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Weight			
								L mm	W mm	H mm	g
Aluminium casing (Al)											
Z 1000 S	141642	220–240	10.3	< 8	4–5	20–100	–	95	43	35	340