


SMT LED Non-maintained emergency light
Indoor, corrosion resistant weatherproof emergency light

EMERGENCY LIGHTS ROCKY



● MEW.3.NC180.NM

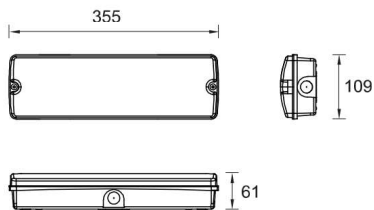

Dimension: mm NTS

TECHNICAL DATA

| | |
|-------------------|--|
| Mode of Operation | : Non-Maintained |
| Lamp | : Maxspid 3W SMT LED Lamp |
| Rated Duration | : 3 hrs and others |
| Mains Supply | : 230 Volts, 50/60Hz |
| Power Consumption | : < 2W |
| Battery | : High temp Nickel Cadmium |
| Charge Monitor | : Green LED Ø5mm |
| Test Facility | : Tactile switch |
| Safety Feature | : Low volt cut-off preventing battery overdischarge |
| Housing | : Injection moulded fire retardant high impact polycarbonate diffuser and base. Clear reeded diffuser is designed for non-glare and greater light distribution |
| Mounting | : Wall or ceiling |
| Cable Entry | : Ø20mm K/O hole |
| Weight | : 0.6kg (gross) |
| Compliance | : SS 563 : Part 1 & 2, SS IEC 60598-2-22 |
| Warranty | : 1 year |

KEY FEATURES

- > Using Surface Mount Technology LED
- > High Durability & Reliability
- > Low Heat
- > Low Maintenance
- > Low Power Consumption
- > No "Black Ends"

ORDERING GUIDE (Please check with Sales Dept if customisation is required)

| Model | Lamp | Battery type |
|----------------|------------|----------------|
| MEW.3.NC180.NM | 3W SMT LED | Nickel Cadmium |

Note:
Optional silkscreen printed legend on cover to convert into an emergency exit light.
*Heating strip applicable (for cold room used)

 Type and batch tested with
PSB PLS-LISTED LABEL


Surface Mount
Compact Emergency
Luminaire


IP65


DIFFUSER
POLYCARBONATE
BASE


SINCE 1978

Specifications subject to changes without prior notice.

