



Microwave / Motion Sensor
Available upon request



ARENA G2

LED FLOODLIGHT



FEATURES

- Die-casting / High Thermal Conductivity Aluminium
- Polyester powder Coated Body
- Glass+Polycarbonate Lens
- Die-cast Aluminium Mounting Bracket
- Unisolated Driver
- 0-10V / DALI available upon request


CHARACTERISTICS

- Wattage : 500W - 1000W
- Input Voltage : AC100~240V, 50/60Hz
- Light Efficacy : 160 lm/W
- Power Factor : >0.90
- Color Rendering Index (CRI) : >70Ra / 80Ra / 90Ra
- Color Temperature CCT : 4000K / 5000K / 5700K
- Light Source : LED @ 50,000hrs
- LED Driver : Sosen/Moso
- Optic Lens : Symmetric 15°/30°/45°/60°/NB-P60°
Asymmetric / Narrow / Wide
- IP Rating : IP66
- IK Rating : IK08

DIMENSION (mm)

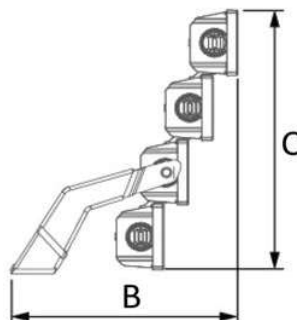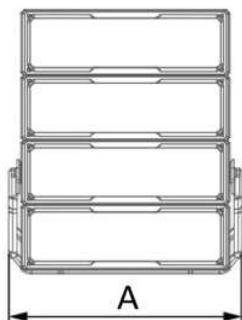

PHOTOMETRIC CURVE

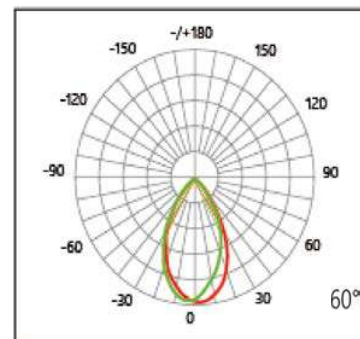

Model No.	Description	A(mm)	B(mm)	C(mm)	Weight(kg)
ARG250057	ARENA G2 LED Floodlight 500W	484	283	347	11.8
ARG275057	ARENA G2 LED Floodlight 750W	520	454	460	18.5
ARG210057	ARENA G2 LED Floodlight 1000W	520	507	612	24

** The above ordering code is base on CCT ~ 5700K