

Products Specification

REFERENCE:		CODE / SYMBOL:	
LOCATION:			




Product family benefits

- Small housing for flexible luminaire designs
- Higher quality of light thanks to < 3% output ripple current
- Operating temperature: up to 60 °C
- User flexibility with four different output currents from one driver
- Flexible current selection via DIP switch
- Reversible overtemperature, overload, short-circuit and open-circuit protection
- High efficiency (up to 90%)

Areas of application

- Extra small design for downlights, spotlights and other indoor luminaires
- Suitable for luminaires of protection classes I and II
- Suitable for indoor SELV installations

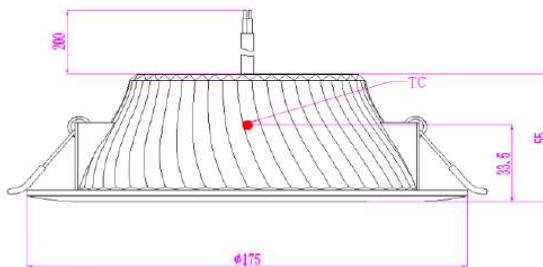

6 inch

CORE-DL-DF-20-B-XXX-6

(CUT-OUT 142mm)

OSRAM

Digital Systems

Specifications

Model:	Core-DL-DF-20-B-xxx-6
Description:	LED Downlight with white body
Mounting:	Recessed
Material:	Diffused Cover
Finishing:	Aluminum


LED:	Osram LEDs
CCT:	2700 / 3000 / 4000 / 6500
Wattage:	17.0 / 15.2 / 13.4 / 11.7
Lumens (lm):	2350 / 2146 / 1932 / 1739
CRI (>Ra):	>80
Lifespan:	>50,000Hrs @L70/B50

THD (%)	less than 15%
Beam Angle (FWHM):	105°

Driver:	OSRAM (Galvanic Isolated)
Dimmable:	DALI / 1-10 / 0-10/ Phase-Cut
Power Factor	0.95

Protection Rating:	IP54 (exposed part)
Efficacy (Lm/W)	Up till 143
Remark:	-

Photometrics / Lamp Data

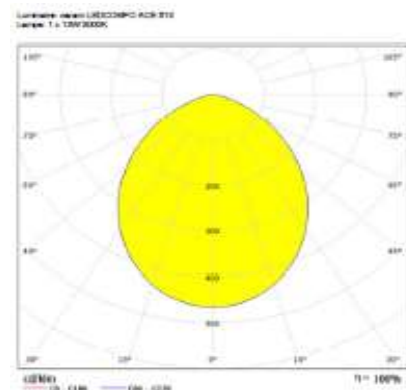

For Consultant / Architect / Client

Comments:
Approved by:
Contact:
Date: