
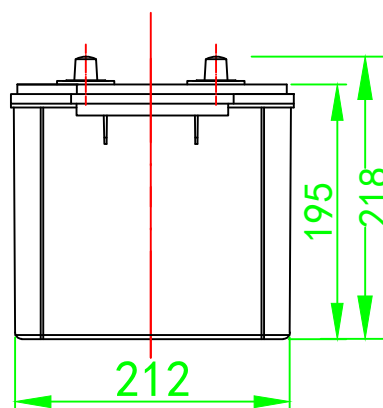


DINB MF- MAINTENANCE-FREE TRUCK BATTERY

This product has excellent characteristics of large current discharge, advance lead calcium alloy and special diachylon method, anti-acid mist filter plate, anti-shake, prevent coldness, low discharge, less water losing, well cold starting capability, etc.

电池规格 SPECIFICATIONS

标称电压 Nominal Voltage	12V
额定容量 Rated Capacity	180Ah @20hr to10.5V @25℃
储备容量 Reserve Capacity	292min @RC to10.5V @25℃
电池重量 Weight	38.6 kg ± 3%
尺寸 Dimensions	509×220×195(mm)
卡表CCA Tester CCA	1300
使用温度 Usage Temperature	Discharge: -40℃～60℃
	Charge: -40℃～60℃
	Storage: -40℃～60℃
最佳使用温度 The Best Usage Temperature	10℃～30℃
恒流充电电流 Constant Charging Current	15.0A
恒压充电电压 Constant Charging Voltage	13.8V
最大充电电流 Max.Charge Current	45 A
最大放电电流 Max.Discharge Current	1300 A
端子 Terminal	Tapered terminals/Flat head terminals
槽盖材料 Battery Case material	PP
执行标准 Execution Standard	GB/T 5008.1-2013

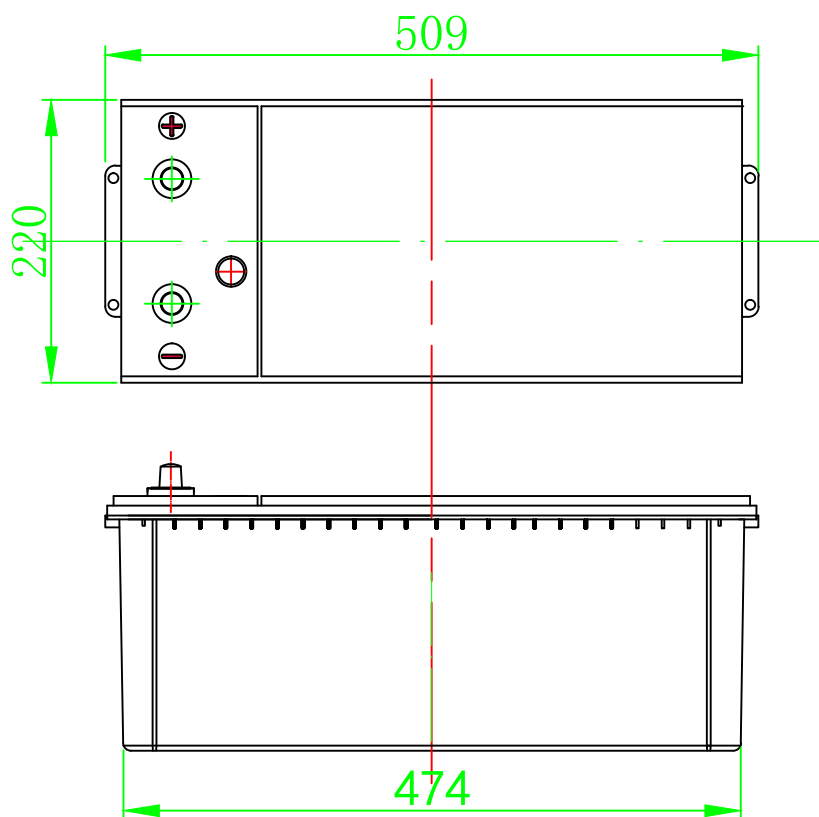

YINGDE AOKLY POWER CO.,LTD

HUAQIAO INDUSTRIAL ZONE,DONGHUA
TOWN,YINGDE CITY, GUANGDONG
PROVINCE, CHINA.
TEL:86-20-86861998
FAX: 86-20-86878822
[http: www.aokly-battery.com](http://www.aokly-battery.com)