

CRYSTAL

WALL PACK

30-60W



ELAP

LESS IS MORE

Superior performance with POWER & CCT selectable

LOW GLARE

Shielded LED source reduces glare while delivering best-in-class forward throw

CONVENTIONAL

Standard size with removable hinged door for easy installation

UNIVERSAL

120-277V, 6-6KV surge protection complied with ANSI standard




Series	Power	CCT	Beam Angle	DIM	Voltage	CRI	Finish	Mounting	Sensor	Accessory
CRYSTAL WALL PACK	30W 40W 60W	3000K 4000K 5000K	Type IV	0~10V	120~347V	Ra80	Black	Wall	Optional Sensor Microwave sensor with 8 meters detection area.	Photocell

Lumen Table


Model No.	Power	LPW	Lumens
ELAP SA60 AT 30W SELECTED	30W	140	4200
ELAP SA60 AT 40W SELECTED	40W	140	5600
ELAP SA60 AT 60W SELECTED	60W	140	8400

Above test results are based on initial stage and with AC230V input.

Dimension

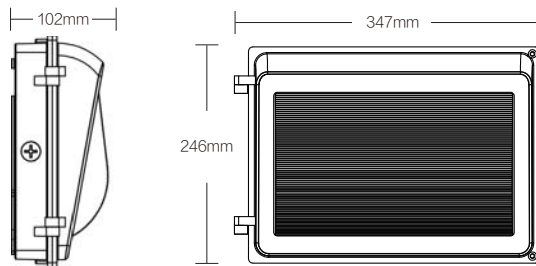

Optical

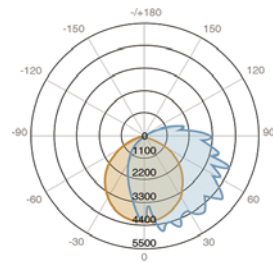

Type IV

Accessories

