


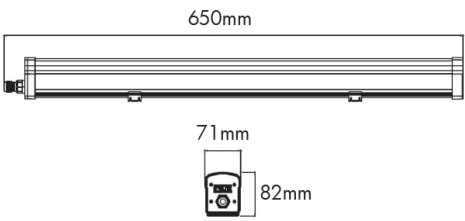


<b>PROJECT</b> <b>LIGHTING PROPOSAL</b>	<b>LOCATION</b>	<b>LUMINAIRE REFERENCE</b>
--	-----------------	----------------------------


<b>PRODUCT DESCRIPTION</b>  15W LED Surface/wall mounted linear luminaire, 1890lm, c/w built-in micro wave motion sensor & LED driver. IP65.
--

### TECHNICAL DATA




<b>BRAND / MODEL</b>	EYELITE EY253-15WXXXMS -2FT
<b>HOUSING MATERIAL</b>	Polycarbonate housing
<b>DIFFUSER MATERIAL</b>	Polycarbonate Diffuser
<b>LAMP TYPE</b>	LED
<b>LAMP WATTAGE</b>	15W
<b>LOSSES</b>	Included or Tolerance +10% Max
<b>INPUT VOLTAGE / HZ</b>	220V-240V / 50Hz/60Hz
<b>POWER FACTOR</b>	>0.9
<b>LUMEN</b>	2250 lm
<b>EFFICACY</b>	150 lm/w
<b>COLOR TEMPERATURE</b>	4000K / 6500K
<b>COLOR RENDERING INDEX</b>	CRI >Ra80
<b>BEAM ANGLE</b>	120 Degree
<b>LIFE SPAN</b>	(L70), >50,000 hours @ Ta:40°C
<b>INGRESS PROTECTION RATING</b>	IP65
<b>IMPACT PROTECTION RATING</b>	IK 08
<b>CUT-OUT (CEILING OPENING)</b>	650 x71 x 82mm
<b>COUNTRY OF ORIGIN</b>	Singapore
<b>MANUFACTURE</b>	China
<b>WORKING TEMPERATURE</b>	-30°C to +40°C
<b>HOUSING COLOR</b>	WHITE FRAME
<b>WEIGHT</b>	0.71kg
<b>CERTIFICATIONS</b>	CB Scheme IEC 60598-1 EN60598-1, IEC&EN60598-2-1, IEC/EN62471,EN62493, EN61000-3-2,EN61000-3-3,EN55015, EN61547,IESNA LM-80,TM-21

**PHOTOMETRY/BEAM ANGLE**



Standby dimming level at 10% consume only 4 W  
Holding time is 1 mins






Stand-by dimming level      Hold time


Power consumption at 10% dimming ,EY253-18W: 4w,

**Detection coverage**

Ceiling Mounted



Wall Mounted



■ Well covered

■ Covered

