



# +FLEX 160

IP20 CRI >95Ra Flexible LED Tape

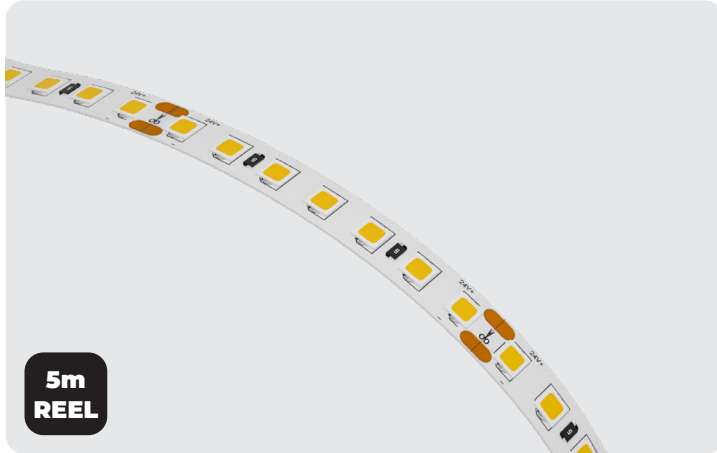

## Product Features

- High CRI >95Ra
- Available in four different colour temperatures
- Industrial grade adhesive backing tape
- Bespoke design and cutting service available
- Operating temperature -20°C ~ +45°C
- Humidity 40% - 70% RH
- High efficacy
- 3 years warranty



## Specifications

Stock Code	0936-206 <span style="color: orange;">●</span>	1019-237 <span style="color: yellow;">●</span>	1181-411 <span style="color: white;">○</span>	1648-916 <span style="color: lightblue;">○</span>
Part Code	B7-2-160-20-95	C0-2-160-20-95	D0-2-160-20-95	F0-2-160-20-95
Input Voltage	24VDC	24VDC	24VDC	24VDC
Power/metre	8.2W/m	8.2W/m	8.2W/m	8.2W/m
Lumen Output	1080lm/m	1170lm/m	1197lm/m	1197lm/m
Efficacy	132lm/W	143lm/W	146lm/W	146lm/W
CCT	2700K	3000K	4000K	6000K
LED/metre	160	160	160	160
LED Pitch	6.25mm	6.25mm	6.25mm	6.25mm
Cut Points	50mm	50mm	50mm	50mm
CRI (Ra)	>95	>95	>95	>95
IP Rating	IP20	IP20	IP20	IP20
Dimensions	5000 x 8 x 1.2mm	5000 x 8 x 1.2mm	5000 x 8 x 1.2mm	5000 x 8 x 1.2mm




2700K



3000K



4000K

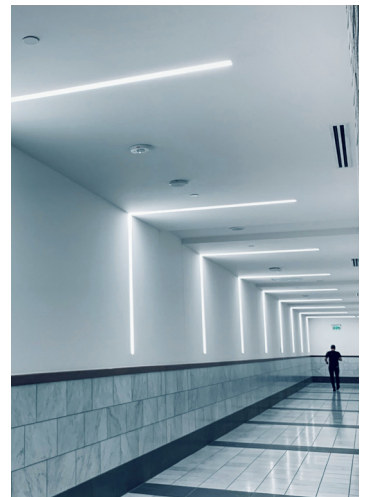


6000K



# +FLEX 160

IP65 CRI >95Ra Flexible LED Tape

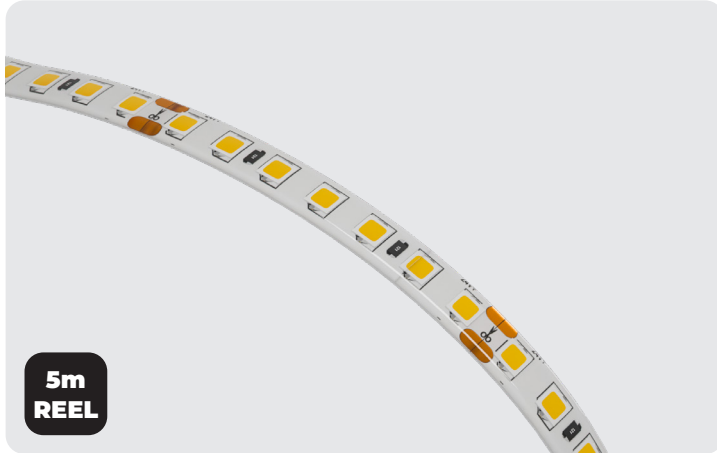

## Product Features

- High CRI >95Ra
- Available in three different colour temperatures
- Industrial grade adhesive backing tape
- Bespoke design and cutting service available
- Operating temperature -20°C ~ +45°C
- Humidity 40% - 70% RH
- High efficacy
- 3 years warranty



## Specifications

Stock Code	0295-304 ●	1278-778 ○	1712-930 ○
Part Code	C0-2-160-65-95	D0-2-160-65-95	F0-2-160-65-95
Input Voltage	24VDC	24VDC	24VDC
Power/metre	8.2W/m	8.2W/m	8.2W/m
Lumen Output	1066lm/m	1066lm/m	1089lm/m
Efficacy	130lm/W	130lm/W	133lm/W
CCT	3000K	4000K	6000K
LED/metre	160	160	160
LED Pitch	6.25mm	6.25mm	6.25mm
Cut Points	50mm	50mm	50mm
CRI (Ra)	>95	>95	>95
IP Rating	IP65	IP65	IP65
Dimensions	5000 x 8 x 2.2mm	5000 x 8 x 2.2mm	5000 x 8 x 2.2mm



3000K



4000K



6000K



# +FLEX 160

IP20 & IP65 CRI >95Ra Flexible LED Tape



## Compatibility\*



## Suggested Drivers

### Non-Dimmable


<p><b>Up to 1m</b> Power supplied from ONE end PCV2420</p>	<p><b>Up to 3m</b> Power supplied from ONE end PCV2436-REV-A</p>	<p><b>Up to 5m</b> Power supplied from ONE end PCV2450-REV-A</p>	<p><b>Up to 10m</b> Power supplied from MIDDLE PCV24101-REV-A</p>
--	--	--	---

### Mains Dimming


<p><b>Up to 1m</b> Power supplied from ONE end UVC2425TD-REV-A</p>	<p><b>Up to 3m</b> Power supplied from ONE end UVC2425TD-REV-A</p>	<p><b>Up to 5m</b> Power supplied from ONE end UVC2450TD-REV-A</p>	<p><b>Up to 10m</b> Power supplied from MIDDLE UVC24100TD-REV-A</p>
--	--	--	---

## Mechanical Diagram

### IP20

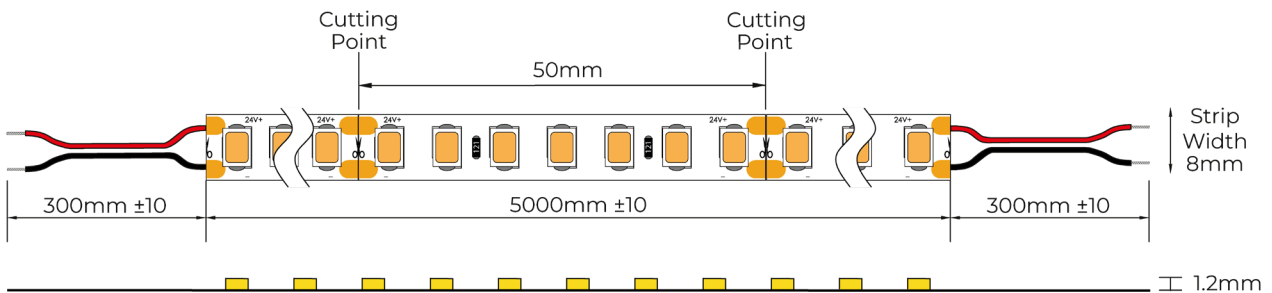

### IP65

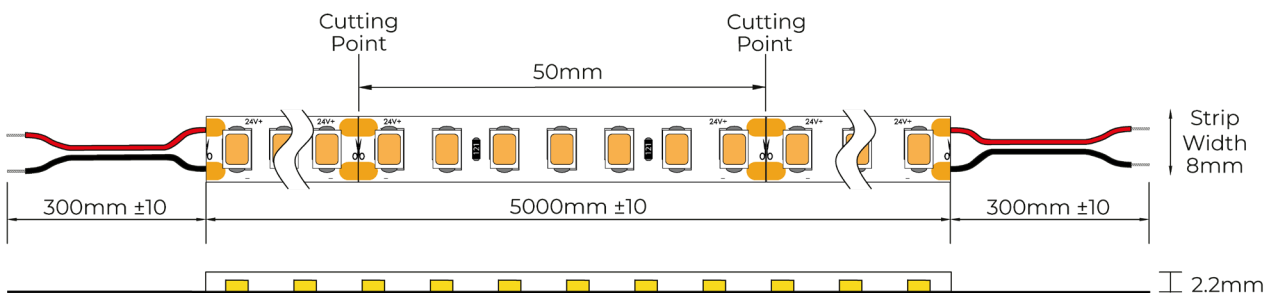

\* Product compatibility with other brands is shown for informational purposes only. All third-party company names and logos are trademarks of their respective owners and do not constitute an endorsement or partnership with our company.