

FUKUDA

2022

N-SERIES BATTERIES

Durability and High Performance Batteries



ISO 9001 & 14001
Certified



ISO 45001 : 2018
Certified

Customized to your needs, **FUKUDA** technology surpasses its competitors in durability and convenience. Tap the energy.

Manufactured in collaboration with the Furukawa Battery Co., Ltd. Japan


TECHNICAL SPECIFICATION OF **FUKUDA** N SERIES

IMPA Order Code	Battery Models	External Dimensions				Capacity (AH)		Dry Weight (KG)	Battery Layout
		Length	Width	Height	T. Height	C5	C20		
79 25 51	12N24	185	125	160	180	22	26	4.50	A (-4) B (-3)
79 25 25	NS40Z	195	127	201	226	25	35	7.80	A (suffix L) B (no suffix)
79 25 31	NS60	240	127	201	226	36	45	9.10	
79 25 37	NS70	258	171	200	226	52	62	11.9	
79 25 38	NX120-7	305	171	201	227	74	90	15.5	
79 25 40	N100	406	173	209	231	80	100	16.0	C
79 25 42	N120	502	180	210	257	96	120	20.0	
79 25 45	N150	505	220	210	257	120	150	24.0	
79 25 50	N200	518	276	216	270	160	200	33.6	
	N200Z					175	215	35.8	

	DIN A	510	190	190	218	100	135	20.0	D
	DIN B	510	220	200	230	130	170	24.0	
	DIN C	518	273	210	241	160	200	33.6	

- Dimensions tolerance +/- 3mm. Weight tolerance +/- 0.2kg
- Prolong the lifespan and protect the warranty of your **FUKUDA** battery by making up for electrolyte loss, viz evaporation, overcharging, etc., with **FUKUDA** battery distilled water at least once every month

KEY TO BATTERY LAYOUT

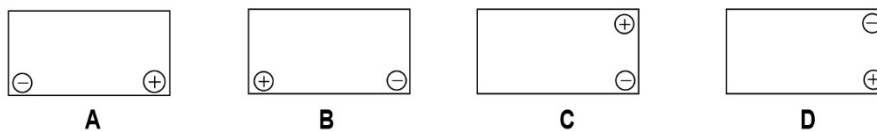

OPTIONAL ACCESSORIES FOR YOUR BATTERY CARE

HYDROMETERS	CHEMICAL RESISTANT SYRINGE	ANALOG BATTERY LOAD TESTER	BATTERY DISTILLED WATER	INDUSTRIAL GRADE BATTERY CHARGER
CUSTOMIZABLE WEATHER-PROOF BOX	PETROLEUM JELLY FOR TERMINALS	DIGITAL BATTERY HEALTH TESTER	CHEMICAL RESISTANT TERMINAL COVERS	AUTOMATIC BATTERY FILLING CAN

This catalogue provides outline information only and is not deemed to form part of an offer or contract. Our policy is one of continued improvement and we reserve the right to change details without prior notice.