

# KOMBIC 200 DOWNLIGHT

K31RD50400P840NRW




## KOMBIC 200 RD 5000 IP44 NW OPAL BR/WH

### Description:

Round recessed downlight model KOMBIC 200 RD, LAMP brand. Interior diffuser made of opal methacrylate specially for LED and bright metallic reflector, injection aluminium dissipator and TOR KIT type easy-fit fastening system. Model for MID POWER LED, with 4000K colour temperature and CRI 80 and control gear included. IP44 protection rating. Insulation class II. Lifetime: 50.000h L70 B10

**Finish:** BRILLIANT METALLIC POLYCARBONATE

**Weight:** 1.536 g




**Installation:** Recessed

### TECHNICAL SPECIFICATIONS:

<b>Light output:</b>	4.016 lm	<b>°K :</b>	4000
<b>Plum:</b>	38,1W	<b>CRI :</b>	80
<b>Efficacy:</b>	105,4 lm/w	<b>MacAdam:</b>	3
<b>Type:</b>	MID POWER LED	<b>Power Supply:</b>	220-240V 50/60Hz
<b>LED Lifetime:</b>	50.000 L70 B10 (Ta=25°C)	<b>Gear:</b>	Electronic
<b>Power:</b>	36W		

*Light output tolerance +/- 10%*

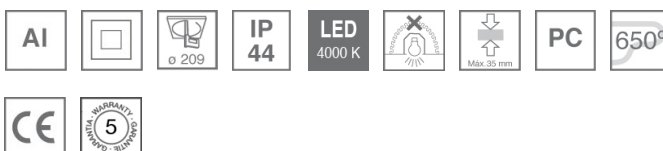

### CUSTOM MADE OPTIONS:




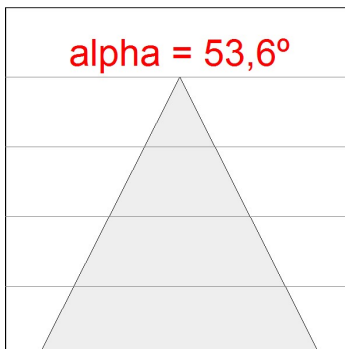
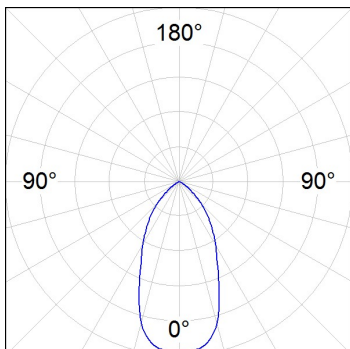
**KOMBIC 200 DOWNLIGHT**

**K31RD50400P840NRW**

**KOMBIC 200 RD 5000 IP44 NW OPAL BR/WH**

**PHOTOMETRIC DATA :**

9241530  
 $\eta = 100\%$   
 $I_{max} = 976 \text{ cd/klm}$   
 UTE: 1,00B + 0,00T  
 CIE: 80 98 100 100 100

H (m)	D (m)	E <sub>max</sub>	E <sub>med</sub>
1	1,01	3916	2469
2	2,02	979	617
3	3,03	435	274
4	4,04	245	154


**ACCESORIES :**

**Optical**



**Product code:**  
ADRD250W

**Description:**  
KOMBIC ACC. Ø250 ADAPTER RING WH.




**Product code:**  
DITRRD240B

**Description:**  
DOMO 220/KOMBIC ACC.TRANS P GLASS BK.



**Product code:**  
DITRRD240G  
DITRRD240W

**Description:**  
DOMO 220/KOMBIC ACC.TRANS P GLASS GR.  
DOMO 220/KOMBIC ACC.TRANS P GLASS WH.



**Product code:**  
RIRD240B

**Description:**  
DOMO 220/KOMBIC ACC. DECO RING BK.



**Product code:**  
RIRD240G  
RIRD240W

**Description:**  
DOMO 220/KOMBIC ACC. DECO RING GR.  
DOMO 220/KOMBIC ACC. DECO RING WH.

## KOMBIC 200 DOWNLIGHT

