


# H.E.L.®

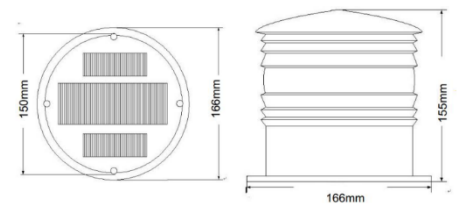

Dimension Drawings

Description	Current product
Part Number	SP LED-SOL214R
Light Output	360°, Comply to ICAO LOW INTENSITY TYPE B
Visibility	Up to 3NM
LED	16 pcs
Minimum Autonomy	140hrs
On/Off Level	60/100 Lux
Lifespan of LEDS	up to 50,000 Hours
Solar panels	Mono-crystalline;Maximum Power 2.1Wp;Efficiency 20%
Battery	Ni-Mh , replaceable;5Ah
Lens Material / Color	Polycarbonate
Mounting Option	Magnetic / Flange Base
Temperature Range	40°C to +80°C
Waterproof	IP68
Quality Assurance	ISO9001:2015
CE	CTR090817073E