


# 荧光/LED舱顶灯

## FLUORESCENT/LED PENDANT LIGHT

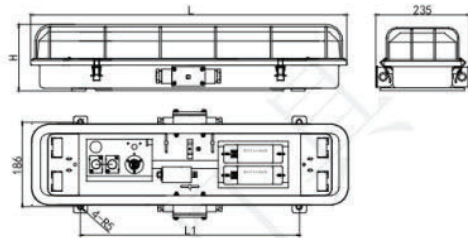

### 适用范围

该灯具适用于各类船舶有滴水、溅水和凝水（如露天甲板、机炉舱、干货舱、轴隧、管弄、外走道）等场所照明之用，工作环境温度-25℃~+45℃。

### The scope of application

This series of lights fit for illumination for the places of ships with water dripping, water spattering, water coagulating (such as weather place, oven cabin, dry cabin, tunnel, pipeline and weather deck etc.). The work environment temperature is -25℃ ~ +45℃.

型号前缀 Type	L	L1	H
LZYC26/ZYC26	715mm	500mm	130mm /+ "F" 150mm
LZYC46/ZYC46	1333mm	1100mm	130mm /+ "F" 150mm

### 主要技术参数 Main parameter

光源类型 Light source type	型号Type	电压 Voltage	功率Power	灯座 Lampholder	光通量 Luminous flux	色温 Color temperature	防护等级 Protection class	电缆外径 Cable outside diameter	壳体材质 Housing material	灯罩材质 Diffuser material	重量 Weight
荧光灯管 Fluorescent Lamp	ZYC26-2	110V/60HZ 220V/60HZ 220V/50HZ	2x18W	G13	1270lm	6500K	IP56	Φ10mm - Φ14mm	镀锌钢板 或 不锈钢板 Galvanized sheet or Stainless steel	聚碳酸酯 PC	5.5kg
	ZYC26-2E		2x18W+15W		1270lm						5.6kg
	ZYC46-2		2x36W		2850lm						9.2kg
	ZYC46-2E		2*36W+15W		2850lm						9.3kg
LED灯管 LED Lamp	LZYC26-2	220V~240V /50HZ/60HZ	2x8W	G13	1250lm	4000K or 6500K	IP66	Φ10mm - Φ14mm	镀锌钢板 或 不锈钢板 Galvanized sheet or Stainless steel	聚碳酸酯 PC	4.8kg
	LZYC26-2E		2x8W+3W		1250lm						4.9kg
	LZYC46-2		2x16W		2680lm						8.4kg
	LZYC46-2E		2x16W+3W		2680lm						8.5kg

备注：此灯具在型号后缀加上“F”，则代表配置防护网罩；型号后缀加上“J”，则代表配置减震装置；型号后缀加上“G”，则代表配置附加应急照明装置，持续放电时间≥3小时。

Note: Adding "F" to the suffix of the model means the configuration of protective mesh cover; Adding "J" to the suffix of the model means that the shock absorber is configured; Adding "G" to the suffix of the model means the configuration of additional emergency lighting devices, and the continuous discharge time is ≥3 hours.