



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL-D 18W/10 1SL/25

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | Lamp Current (Nom) | | 0.36 A | |
|---------------------------------|---------------------------------|---------------------------------|-------------------------------|--------|--|
| Cap-Base | G13 [Medium Bi-Pin Fluorescent] | Voltage (Nom) | 59 V | | |
| Life to 50% Failures (Nom) | 13,000 hour(s) | Mechanical and Housing | | | |
| Useful Life (Nom) | 9,000 hour(s) | Bulb Shape | T26 | | |
| Light Technical | | Approval and Application | | | |
| Color Code | 10 | Mercury (Hg) Content (Nom) | 5.0 mg | | |
| Color Designation | Actinic | UV | | | |
| Chromaticity Coordinate X (Nom) | 222 | UV-A Radiation 100Hr (IEC) | 5.0 W | | |
| Chromaticity Coordinate Y (Nom) | 210 | Product Data | | | |
| UV Depreciation at 2000 h | 8 % | Order product name | Actinic BL TL-D 18W/10 1SL/25 | | |
| UV Depreciation at 5000 h | 12 % | Full product name | Actinic BL TL-D 18W/10 1SL/25 | | |
| UV Depreciation at 8000 h | 16 % | Full product code | 871150026325440 | | |
| Operating and Electrical | | | | | |
| Power Consumption | 18 W | | | | |


Actinic BL TL(-K) / TL-D(-K)

| | |
|-------------------------------|---------------|
| Order code | 928048001003 |
| Material Nr. (12NC) | 928048001003 |
| Numerator - Quantity Per Pack | 1 |
| Net Weight (Piece) | 71.000 g |
| EAN/UPC - Product/Case | 8711500263254 |


| | |
|---------------------------------|---------------|
| Numerator - Packs per outer box | 25 |
| EAN/UPC - Case | 8711500263261 |

Dimensional drawing

| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|-------------------------------|---------|----------|----------|----------|---------|
| Actinic BL TL-D 18W/10 1SL/25 | 28 mm | 589.8 mm | 596.9 mm | 594.5 mm | 604 mm |

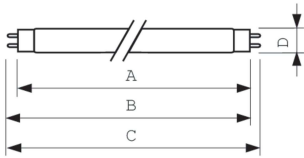

Photometric data

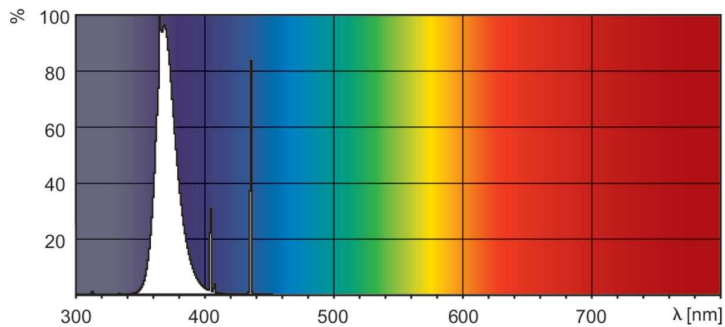

Spectral Power Distribution Colour - Actinic BL TL-D 18W/10 1SL/25

