

Lead - Acid Starter Battery




Application: To Start Passenger Cars & Internal Combustion Engines

SPECIFICATIONS	
Battery Type/Model	135D31R/L (M27/L)
Rated Capacity (AH)	100 AH
Rated Voltage (Volt.)	12 V
Cold Cranking Ampere (CCA @-18 °C)	650
Ambient Cranking Ampere (CA @25°C)	950
Reserve Capacity(RC)	147 (min)
Dimensions L x W x H (mm)	306 X 173 X 225
Filled Weight (Kg)	22.0
Maximum Discharge Current for 5 sec	1030 A
Case Material	PP
Terminal	Pb-Sb Alloy
Separator type	PE




GENERAL FEATURES:

- Improved deep cycle capabilities
- Ensure long-lasting performance by considering Marine condition
- High cranking power and consistent performance
- Enhanced electrolyte formulation ensure longer life
- Reinforced construction ensure exceptional resistance to vibrations

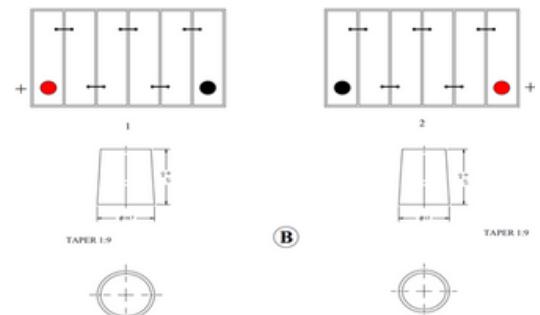

Terminal Layout

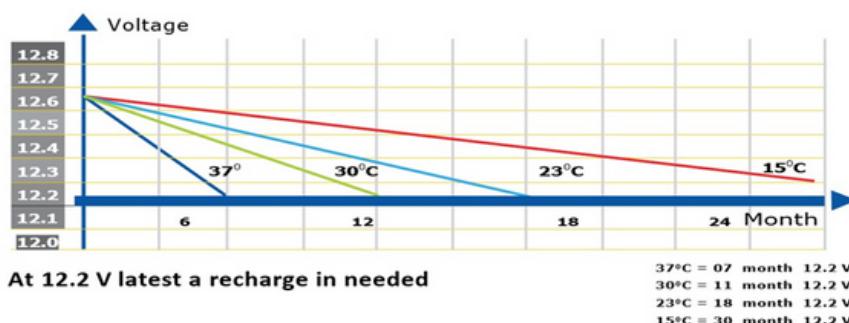

Voltage vs Discharge Time Graph