



Accessories

Nozzle assembly*

For floor
Part No.

- 127825-8
- 127827-4
- 127828-2



Nozzle assembly

For floor/carpet
Part No.

- 191X06-4



Nozzle assembly

For floor
Part No.

- 123486-2
- 123488-8
- 123539-7



Sheet Nozzle

Part No.

- 199038-1
- 199041-2
- 199039-9



Flexible hose

Part No. 191E30-3



Flexible hose

Part No.

- 198868-7
- 198545-1
- 198547-7



Sash nozzle*

Part No.

- 451240-7
- 451243-1
- 413809-5



Long sash nozzle

Part No.

- 198919-6
- 198990-0
- 198992-6



Nozzle holder*

Part No.

- 459354-6
- 459355-4
- 459038-6



Round brush

Part No.

- 198878-4
- 198553-2
- 198555-8



Crevice nozzle 415

Part No. 199439-3



Shelf brush

Part No.

- 198873-4
- 198538-8
- 198540-1



Straight pipe set 340

For Cyclone attachment set

Part No.

- 191D76-3
- 191D78-9
- 191D77-1



Straight pipe with pipe lock*

Part No.

- 459353-8
- 459356-2
- 458942-6



Straight pipe with pipe lock

Part No.

- 1910Y3-1

L: 479-719mm



DCL283F / DCL284F only

Filter set

Part No.
443060-3



Pre-filter

Part No.
451208-3



Easy shake off filter B set

Part No.
199966-0



Filter H set

Part No.
199989-8

HEPA filter



DCL283F / DCL284F only

Cyclone attachment set with pipe lock

Part No.

- 191D71-3
- 191D73-9



Holder Set

Part No. 199971-7



Tool bag set

Part No. 199901-8

LxWxH:
600x210x
190mm



For all 3 models

Cyclone unit set

Part No.

- 1910D3-4
- 1910D5-0



Only for Cyclone unit set

High performance filter set

Part No.
1910C7-9



Filter H set

Part No.
1910C9-5

HEPA filter



*Standard Equipment

Charging Time

	 DC18RC	DC18SD
 BL1815N 1.5Ah 196449-1	15 min	30 min
BL1820B 2.0Ah 197254-9	24 min	45 min
BL1830B 3.0Ah 197599-5	22 min	60 min
BL1850B 5.0Ah 197280-8	45 min	110 min
BL1860B 6.0Ah 197422-4	55 min	130 min

Cordless Cleaner

DCL283F / DCL284F / DCL286F

	DCL283F	DCL284F	DCL286F
 Electronic 4-Speed DCL284F/DCL286F only			
 Built-in Job Light			
Capacity	730 mL	730 mL	Cyclone: 250 mL
Continuous Use	w/ BL1830B: 10 min	w/ BL1830B, Mode 1 / 2 / 3 / 4: 38 / 21 / 15 / 8	w/ BL1830B, Mode 1 / 2 / 3 / 4: 38 / 21 / 15 / 8
Max air flow	1.1 m³/min	1.2 m³/min	1.0 m³/min
Max sealed suction	17.5 kPa	18 kPa	18 kPa
Noise level	63 dB(A)	Mode 1 / 2 / 3 / 4: 54 / 60 / 62 / 65 dB(A)	Mode 1 / 2 / 3 / 4: 55 / 60 / 62 / 66 dB(A)
Dimensions (L x W x H)	w/o Pipe & Nozzle, w/ BL1830B: 503 x 113 x 155 mm (19-3/4 x 4-7/16 x 6-1/8") w Pipe & Nozzle, w/ BL1830B: 1,066 x 113 x 155 mm (42 x 4-7/16 x 6-1/8")	w/o BL1830B: 503 x 113 x 153 mm (19-3/4 x 4-7/16 x 6") w Pipe & Nozzle, w/ BL1830B: 1,066 x 113 x 153 mm (42 x 4-7/16 x 6")	w/o BL1830B: 543 x 113 x 177 mm (21-3/8 x 4-7/16 x 7") w Pipe & Nozzle, w/ BL1830B: 1,106 x 113 x 177 mm (43-1/2 x 4-7/16 x 7")
Net weight	1.3 - 1.6 kg (2.9 - 3.5 lbs.)	1.3 - 1.6 kg (2.9 - 3.5 lbs.)	1.6 - 1.9 kg (3.5 - 4.2 lbs.)

Standard Equipment : Nozzle assembly, Sash nozzle, Nozzle holder, Straight pipe, Easy shake off filter EX (DCL283F, DCL284F), Easy shake off filter (DCL286F), Battery, Charger

The weight does not include accessories but battery cartridge(s). The lightest and heaviest combination weight of the appliance and battery cartridge(s) are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Singapore Pte Ltd

7, Changi South Street 3, Singapore 486348
Phone : +65-6546-8700 Fax : +65-6546-8711
Email : msgproductteam@makita.com.sg
Website : www.makita.com.sg
Facebook : www.facebook.com/MakitaSG



VISIT OUR WEBSITE



DOWNLOAD LEAFLET

PRINTED IN SINGAPORE




Cordless Cleaner
DCL283F / DCL284F / DCL286F




photo: DCL286F



DCL283F



DCL284F



DCL286F

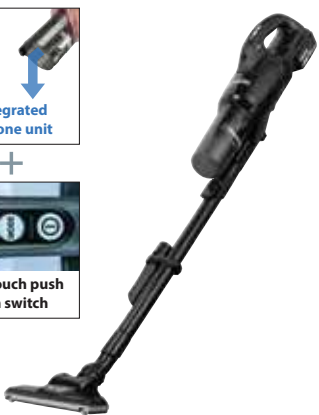




photo: DCL284F

18V LXT BL Cordless Cleaner

Capsule type

Dust capacity **730 mL**



photo: DCL283F

Improved dust-resistance

When capsule is installed securely, two ribs inside capsule press the inside frame of filter to hold the filter tight.



DCL283F

Trigger switch



DCL284F

One-touch push button switch




HEPA filter




Integrated cyclone unit

Dust capacity **250 mL**

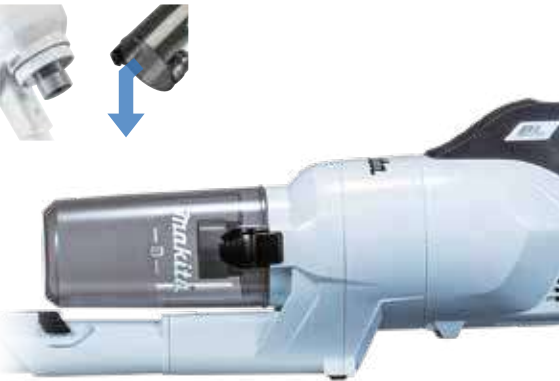

Integrated Cyclone unit

The filter is less clogged due to separation of fine dust through a cyclone air flow, reducing the decrease in vacuum power of cleaner.



the amount of dust that can be sucked before filter maintenance

DCL286F

One-touch push button switch




Easy filter setting
Filter can be fixed with a single push.



High suction power and Low noise level

- Achieved by redesigning the exhaust air flow path of the motor to reduce wind noise.
- Equipped with high-speed BL motor to ensure high suction power.

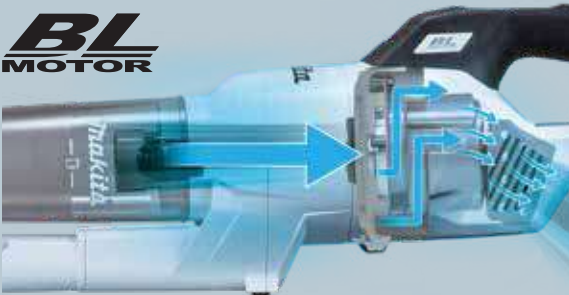

Low noise

DCL283F

63 dB(A)

DCL284F **65** ^[Mode 4] dB(A)

DCL286F **66** ^[Mode 4] dB(A)

Redesigned Floor/ Carpet T-nozzle

- Redesigned structure reduces the resistance caused by suction, providing smooth running.
- Redesigned inside air flow path reduces the noise made inside the nozzle.



Trigger switch + Sliding lock-on switch

(DCL283F only)

allows for long continuous cleaning with less fatigue.




By moving ① sliding lock-on switch to ON position, ② interlocking trigger switch can be locked on for continuous cleaning.

4-suction power mode selection with mode memory function

(DCL284F / DCL286F only)

- The cleaner can memorize a previous power mode and resume vacuuming at the same mode as last time user turned off for user convenience.
- Power mode can be selected before the cleaner is turned on.

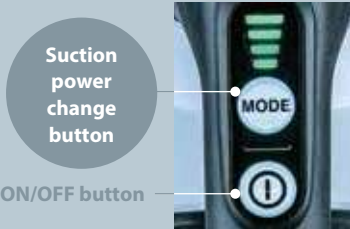

Single LED job light

also functions as a battery capacity warning lamp.



Pipe locking mechanism

Pipe is fixed with the locking mechanism to prevent it from accidentally coming off.



Pipe with beveled end

Cleaning of tight places can be done without nozzle by using the beveled end of pipe as a nozzle.

