



Applications

- Uninterruptible Power Supply (UPS)
- Electric Power System (EPS)
- Emergency Light
- Emergency backup power supply
- Railway signal system
- Marine and power stations
- Aircraft signal system
- Alarm and security system
- Electronic apparatus and equipment
- DC power supply
- Communication power supply
- Network communication

Battery Construction

COMPONENT	POSITIVE PLATE	NEGATIVE PLATE	CONTAINER	COVER	SAFETY VALVE	TERMINAL	SEPARATOR	ELECTROLYTE
Raw material	Lead dioxide	Lead	ABS	ABS	Rubber	Copper/Plug	Fiberglass	Sulfuric acid

Performance Characteristics

■ Nominal Voltage	12V
■ Number of Cell	6
■ Nominal Capacity (77°F / 25°C)	
20 Hour rate (3.484A, 10.8V)	69.6Ah
10 Hour rate (6.565A, 10.8V)	65.6Ah
5 Hour rate (11.24A, 10.8V)	56.2Ah
1 Hour rate (41.15A, 10.5V)	41.1Ah
■ Internal Resistance	
Fully charged battery (77°F / 25°C)	6.5mΩ
■ Capacity affected by temperature (10 hour rate)	
104°F (40°C)	107%
32°F (0°C)	76%
77°F (25°C)	100%
5°F (-15°C)	60%
■ Self-Discharge 68°F (20°C)	
Capacity after 3 month storage	90%
Capacity after 6 month storage	80%
Capacity after 12 month storage	60%
■ Max. discharge current 77°F / 25°C	520A(5s)
■ Charge Methods: constant voltage charge 77°F / 25°C	
Cycle use	14.4 ~ 14.7V
Max. Current	13A
Standby use	13.5 ~ 13.8V

Dimensions and Weight


Type	Length	Width	Height	Total Height	Approx. Weight
SI Units	350mm	167mm	180mm	180mm	19.8Kg
English Units	13.78inch	6.57inch	7.09inch	7.09inch	43.7lbs

Constant Current Discharge (Amperes at 77°F/25°C)

V/cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60	217.8	139.8	113.8	73.13	42.25	17.47	11.72	6.825	3.744
1.65	204.8	133.3	111.4	72.16	41.96	17.37	11.65	6.760	3.679
1.70	191.8	126.8	108.9	71.18	41.67	17.26	11.58	6.695	3.614
1.75	172.3	117.0	103.0	69.23	41.15	17.06	11.41	6.630	3.549
1.80	149.5	106.0	96.53	66.56	40.30	16.74	11.24	6.565	3.484

General Features

- **Oxygen recombination technology means the battery is maintenance free and no water adding required.**
- **Not restricted for air transportation as Nollon Battery complies with IATA/ICAO special provision A67.**
- **Raw material used in Nollon battery is of CE and UL (MH49077) standards.**
- **Computer designed lead-calcium tin plate grid alloy provides high power density and less gassing.**
- **ABS case (optional for Fire Retardant case).**
- **Sealed valve regulated thus allowing installation horizontally or vertically.**
- **Spill/leak proof and vibration resistant.**
- **Long service life for float or cyclic applications.**
- **Design life 10 years**

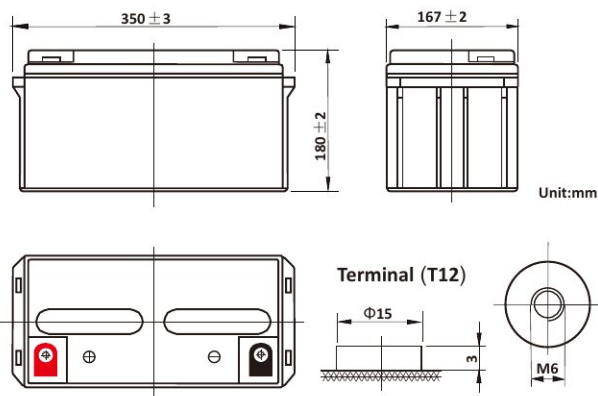

Constant Power Discharge (Watts/cell at 77°F/25°C)

V/cell	5min	10min	15min	30min	1h	3h	5h	10h	20h
1.60	375.6	249.2	206.6	136.5	80.98	34.65	23.30	13.59	7.482
1.65	357.2	239.8	203.6	135.3	80.60	34.48	23.20	13.48	7.355
1.70	338.8	230.3	200.5	134.0	80.21	34.31	23.09	13.37	7.228
1.75	308.6	215.5	191.5	131.5	79.55	34.01	22.80	13.26	7.098
1.80	271.6	197.8	181.0	127.6	78.25	33.45	22.48	13.13	6.968

(Note: The above characteristics data are average values obtained within three charge/discharge cycles not the minimum values.)

