

OSRAM




Electric Automation
Automation specialists

Referência: L 18 W/62
Código: 4008321232700

FL LUMILUX CHIP controle T8, tampão
G13 L 18W/62

A partir de Electric Automation Network

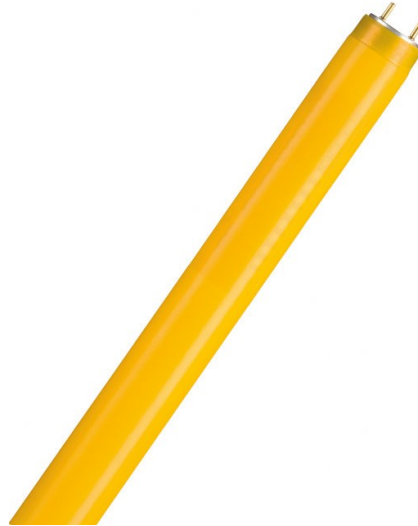

L 18 W/62

Electrical data

Nominal wattage	18.00 W
Rated lamp efficacy (HF data 25 °C)	Under clarification by authority and standardization body
Rated lamp efficacy (standard condition)	52 lm/W
Rated wattage	18.00 W

Photometrical data

Rated fluxo luminous	800 lm
Fluxo Luminous at	970 lm
Light cor	62
Nominal fluxo luminous	800 lm
Light cor (designation)	Yellow
Rated LLMF at h 2,000	0.95
Rated LLMF at h 4,000	0.93
Rated LLMF at 6,000 h	0.91
Rated LLMF at 8,000 h	0.90
Rated LLMF at 12,000 h	0.89

Rated LLMF at 16,000 h	0.88
------------------------	------

Dimensions & weight

Tube diameter	26 mm
Length	590.0 mm
Length with base excl. base pins/connection	590.00 mm
Diameter	26.0 mm
Maximum diameter	26.0 mm

Temperatures & operating conditions

Rated ambient temp.w.max.fluxo luminous	25.0 °C
---	---------

Lifespan

Service life	16000 h
Lifespan	20000 h
Rated lamp survival fator at h 2,000	0.99
Rated lamp survival fator at h 4,000	0.99
Rated lamp survival fator at 6,000 h	0.99
Rated lamp survival fator at 8,000 h	0.99
Rated lamp survival fator at 12,000 h	0.99
Rated lamp survival fator at 16,000 h	0.90
Rated lamp survival fator at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Rated lamp life time	20000 h
Nominal lamp life time	20000 h

Atd>

Base (standard designation)	G13
Mercury content	2.3 mg
Show WEEE picto	Yes

Capabilities

Suitable for indoor	Yes
---------------------	-----

Certificates & standards

Energy efficiency class	B
Energy consumption	23 kWh/1000h