

EL-LED1 LED BULKHEAD

LOW MAINTENANCE EMERGENCY
BULKHEAD IDEAL FOR BOTH EXTERIOR
AND INTERIOR AREAS



TECHNICAL SPECIFICATIONS

MODEL NO:	EL-LED1
Mode of Operation:	Maintained / Non-Maintained
Lamp:	3W White LED
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	< 3W / < 1.5W
Battery:	High Temperature Nickel Cadmium / High Temperature Lithium LiFePO4
Charger:	Constant Current / Constant Voltage, Short Circuit protected
Charge Monitor:	LED
Test Facility:	Momentary test switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Injection moulded with fire retardant (UL94), high impact PC/ABS material
Weight:	Approx. 0.6 Kg
Dimensions:	120mm (H) x 277mm (W) x 40mm (D)
Standards / Compliance:	SS IEC 60598-2-22, SS 563


Ordering Guide:

Ordering Code


Maintained Mode
EL-LED1M

Non-Maintained Mode
EL-LED1NM

Accessories:




Recess Plate
EL-LED



Spring Bracket
EL-LED

- Low heat generation, ensures long and reliable service life.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge.
- Charge LED indicator and test switch.
- Weatherproof design suitable for indoor and outdoor applications.
- Optimal for anti-panic (open area) and escape route lighting applications.
- High quality, long life LED module.

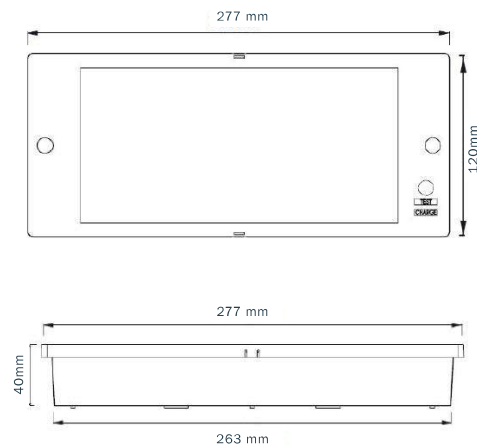

CLASS II



PSB Singapore



Type and batch tested with
PSB PLS-LISTED LABEL

IP65

***Note: Technical Specification subject to change without prior notice