






65mm Reflector

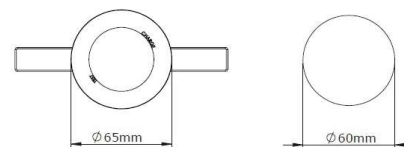

120mm Reflector

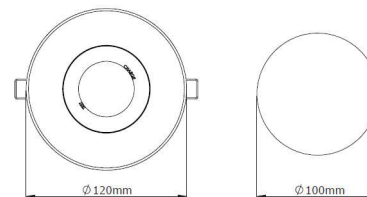

REL5NM-SP



REL5NM-SP RECESS LED



NON-MAINTAINED RECESS EMERGENCY LUMINAIRE

- Long life, environmental friendly Lithium Iron Phosphate (LiFePO4) battery.
- Low Heat generation, ensures long and reliable service life
- Low battery voltage cut-off with latch function, to eliminate battery over discharge
- Charge LED indicator and test switch
- Optimal for anti-panic (open area) and escape route lighting applications
- High Quality, Long life LED module
- Energy saving, extra low standby power consumption
- Slim casing, fit through 55-60mm hole
- Easy installation and low maintenance
- Recess mount

TECHNICAL SPECIFICATION

MODEL NO:	REL5NM-SP
Mode of Operation:	Non-Maintained
Lamp:	3W White LED
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	≤0.5W (on standby)
Battery:	High Temperature Lithium LiFePO4
Charger:	Constant current / Constant voltage, short circuit protected
Charge Monitor:	LED
Test Facility:	Momentary Test Switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Injection moulded with fire retardant (UL94), high impact PC material
Weight:	Approx. 0.2kg
Dimensions:	30mm (H) x 178mm (W) x 22mm (D)
Standards / Compliance:	SS IEC 60598-2-22, SS 563, CB, IEC 61347-2-7, IEC 61347-2-13, IEC 62384, IEC 60598-1

ORDERING GUIDE

REL5NM-SP-Li-65/120MM

***Note : Technical Specification subject to change without prior notice