

# TH20NM-WP WEATHERPROOF TWIN-SPOT LED

OUR WEATHERPROOF TWIN-SPOT IS WELL PREPARED IN HARSH ENVIRONMENTAL CONDITIONS.



## TECHNICAL SPECIFICATIONS



|                         |   |
|-------------------------|---|
| <b>MODEL NO:</b>        | <b>TH20NM-WP</b>  |
| Mode of Operation:      | Non-Maintained  |
| Lamp:                   | 2 x 5W Power LED Module   |
| Rated Duration:         | 3 Hours   |
| Mains Supply:           | 220-240 Volts, 50-60Hz  |
| Power Consumption:      | < 1.5W  |
| Battery:                | High Temperature Lithium LiFePO4 / High Temperature Nickel Cadmium (On request) |
| Charger:                | Constant Current / Constant Voltage, Short Circuit protected                    |
| Charge Monitor:         | LED   |
| Test Facility:          | Momentary test switch   |
| Safety Features:        | Low battery voltage cut off to prevent over discharge                           |
| Fitting Construction:   | Injection moulded with fire retardant (UL94), high impact PC material           |
| Weight:                 | Approx. 1.6 Kg  |
| Dimensions:             | 230mm (H) x 240mm (W) x 85mm (D)  |
| Standards / Compliance: | SS IEC 60598-2-22, SS 563   |

## Ordering Guide:

### Ordering Code

TH20NM-WP

- Low heat generation, ensures long and reliable service life.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge.
- Charge LED indicator and test switch.
- Weatherproof IP65 design suitable for indoor and outdoor applications.
- Adjustable lens for optimum matching to light requirements.

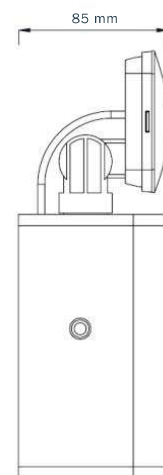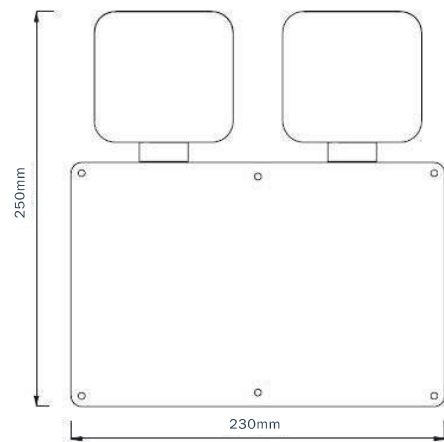

CLASS II



Type and batch tested with PSB PLS-LISTED LABEL

IP65

\*\*\*Note: Technical Specification subject to change without prior notice