

HIKOKI



POWER TOOLS & ACCESSORIES **CATALOGUE**

MAKE. MOVE. GO



Innovation never stops

Ever since 1948 we've been designing and developing high performance power tools. For over 70 years our Japanese engineers have utilized their technological knowledge, skills and experience to constantly improve our power tools. Guided by Japanese design principles, every element of our products is chosen to improve performance, balance, usability, longevity and control. Attention to details that ensures the professional in finishing every single job as easy as possible. That's what drives us and keeps us one step ahead.

HIKOKI

We proudly introduce to you our 2025-2026 catalogue. Have a look at this year's HiKOKI high performance power tools. All bundled in a clear book. Some you may already know, some are provided with the newest designs and latest technologies our in-house designers and engineers have been working on.



CONTENTS.

EVERYTHING
TO REACH
THE HIGHEST
PERFORMANCE.

MAKE.
MOVE.
GO

HIKOKI

HIKOKI

Introduction	2	Grinding	
Contents	4	Disc Grinder	64
General Information	6	Hand Grinder	69
Index	8	Polishing & Sanding	
Technologies	10	Sander Polisher	71
Innovative Highlights	12	Orbital Sander	71
Cordless		Sawing	
Driver Drill	14	Circular Saw	74
Impact Driver Drill	15	Miter Saw	75
Impact Driver	16	Jig Saw	76
100 mm Disc Grinder with Slide Switch	19	Reciprocating Saw	77
125 mm Disc Grinder with Slide Switch	19	Chain Saw	78
Die Grinder	19	Cutting	
Caulking Gun	20	Cutter	78
Heat Gun	21	Cut-off Machine	79
Planer	21	Planing & routing	
Blower	22	Planer	79
Impact Wrench	24	Router	81
Recipocating Saw	25	Pressure Washer	
Band Saw	25	Pressure Washer	82
Work Light	26	Miscellaneous	
Cut-Out Tool	26	Nibbler	84
Cleaner	27	Blower	84
Cooler & Warmer Box	28	Mixer	84
Multivolt Driver Drill	32	Heat Gun	85
Multivolt Impact Driver Drill	33	Table Saw	86
Multivolt Impact Driver	34	Pneumatic	
Multivolt Impact Wrench	36	Compressor	86
Multivolt Disc Grinder with Slide Switch	38	E-Tech Line	
Multivolt Recipocating Saw	41	Cordless Driver Drill	82
Multivolt Chain Saw	42	Cordless Impact Drill	83
Multivolt Hedge Trimmer	43	Corded Drill	84
Multivolt Grass Trimmer	44	Angle Grinder	84
Multivolt Blower	45	Die Grinder	87
Charger		Cutter	88
Charger	46	Planer	89
Battery		Rotary Hammer	90
Battery	48	Demolition Hammer	91
Tool Kit		Cut-off Machine	91
10mm Tool Kit	51	Polisher	92
13mm Tool Kit	51	Heat Gun	92
Drilling		Blower	92
Drill	51	ACCESSORIES	93
Impact Drill	52		
Demolition			
Rotary Hammer	54		
Demolition Hammer	59		
Fastening			
Screw Driver	62		
Impact Wrench	62		

GENERAL INFORMATION.
GOOD TO KNOW BEFORE READING.

Safety

Double-Insulation power tool, indicated by the double square mark (□) can be operated without external grounding. All HiKOKI power tools are designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

General precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children, away from the tool.
4. Wear eye protector to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at a proper regular interval by an authorized Service Center.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Center for repair and/or part replacement.
15. DO NOT use the power tool for any other application than those specified in the handling instructions.
16. DO NOT use the tool for work beyond its prescribed capability.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle hat is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in proper clothing and shoes.
25. Always keep the work area in good order.
26. When not in use, store the power tool.
27. DO NOT stare into LASER beam.

Power input

HiKOKI power tools employ series motors whose modern design is based on our many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 110V to 240V.

Guarantee

The primary concern of Koki Holdings is the convenience and satisfaction of the customer. To this end, each HiKOKI power tool is carefully tested and inspected, and is guaranteed against any defects in workmanship and materials. Defects in workmanship and materials – not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling — will be repaired or replaced without charge.

Icons

	Single Insulation		Blower Function
	Double Insulation		Dust Extracting Type
	Electronic Constant Speed Control		Deep Cut
	Electronic Soft Start Control		White LED Lamp
	Variable Speed		SDS max Shank
	2-speed Gear		SDS-plus Shank
	Multi-Speed Settings		Hex Shank
	Reversible		Hex Shank
	Slip Clutch		Brake
	Orbital Cutting Action		Brake
	Random Orbit Action		Rotation only
	Spindle Lock		Rotation & Hammering
	Shock-Absorbing Handle Type		Hammering only
	Carry Case		
	17mm hex shank		
	28.5mm hex shank		
	30mm hex shank		



Technologies

At HiKOKI we believe that not only the design and overall look and feel of each power tool contributes to an increased comfort and ease of use. It's the technology inside that makes the next power tool and job for the professional even better than before.

BRUSHLESS

Due to the more compact designs compared to brushed motors, the brushless motors permit reductions in size and weight of tools for easier handling. Even under heavy use, the brushless motors significantly extend the product life cycles without causing troubles such as armature burnout, layer short or commutator wear. Plus, they do not require the regular replacement of carbon brushes.



One battery pack, two volt classes - the new and innovative MULTI VOLT battery packs. The 36V Lithium-ion battery packs are compatible with 18V class cordless tools. Intelligent connecting technology make it possible. Depending on the tool, the voltage automatically switches to 18V or 36V.

12V PEAK

The new compact and lightweight 10.8 - 12V Peak slide Lithium-ion battery packs are compatible with the new 10.8 - 12V Peak cordless tools.

Li-ion

A built in electronic control circuit for Lithium-ion battery pack is unique. This circuit provides the protection system available to protect and enhance the performance of these batteries. By always keeping the batteries within safe operating conditions, this electronic control ensures that batteries accept more charges than conventional batteries.



HiKOKI technologies.



Torque Boost ensures dynamic power and effortless cutting. The motor has two preselectable modes: Auto switch mode and High torque mode. In the Auto switch mode, when the electronics detect changes in the workpiece structure, it automatically switches between highest blade speed and High torque to guarantee highly efficient and fast cuts.

RFC

When the tool bit is suddenly overburdened during operation, Reactive Force Control stops the motor to reduce twisting of the main unit preventing user injuries.

FHB

An internal double-insulation construction with a very sturdy aluminium die-cast body is incorporated to make the housing more rigid enhancing the durability of the motor unit significantly.

LVH

Low Vibration Handle consists of rubber dampers and/or hinges to reduce vibration and user fatigue.

UVP

Our original, spring-type dynamic vibration absorber with a weight and two springs/spring leaf moves in the opposite direction to the vibration direction of the main body. This results in reduced vibration and improved operating efficiency.

IP54 IP55 IP56 IP65

The IP-code rates the degree of protection against dust and water ingress. HiKOKI tools that are IP-rated come with silicon-coated electronics protecting the tool.

IP54: Protected against dust. Protected against splash water.

IP55: Protected against dust. Protected against water jets.

IP56: Protected against dust. Protected against powerful water jets.

IP65: Completely dust tight. Protected against water jets.



Our unique Air Spring Drive System uses the compressed air sealed in the main unit. It drives up to 3 nails per second with zero ramp-up time, and it sets nails flush consistently without combustion noise or gas fumes.



LED level indicates if tool is held straight to achieve precisely drilled holes.



Triple hammer reduces vibration by making three impacts per rotation instead of the conventional two. The results are lower vibration levels, greater operator comfort, and ease of use with less cam-out.

INDEX

A

AC 18DA	Cordless Caulking Gun	20
AW 100	High Pressure Washer	76
AW 130	High Pressure Washer	77
AW 150	High Pressure Washer	77

B

BSL 1240M	10.8 - 12V Slide Battery	46
BSL 1820M	18V Slide Battery	46
BSL 1840M	18V Slide Battery	45
BSL 1850MA	18V Slide Battery	45
BSL 36A18	36V/18V MULTIVOLT Slide Battery	46

C

C 10FCE2	255mm Compound Miter Saw	72
C 10RJ	AC 254mm Table Saw	80
C 12FDHB	305mm Compound Miter Saw	72
C 7SS	190mm Circular Saw	71
C 7ST	185mm Circular Saw	71
C 9SA3	235mm Circular Saw	71
CB 18DBL	Cordless Band Saw	25
CC 14STA	355mm Cut-off Machine	75
CC 14STD	355mm Cut-off Machine	75
CC 14STDU	355mm Cut-off Machine	75
CG 36DB	Cordless Grass Trimmer	41
CH 3656DA	Cordless Hedge Trimmer	40
CJ 90VST2	AC 90mm Jig Saw	73
CM 4SB2	110mm Cutter	74
CM 4ST	110mm Cutter	74
CN 16SA	1.6mm (16 Gauge)Nibbler	78
CR 13V2	130mm Reciprocating Saw	74
CR 18DBL	Cordless Reciprocating Saw	25
CR 36DA	Cordless Reciprocating Saw	38
CS 3635DB	Cordless Chain Saw	39

D

D 10VSTA	10mm Drill	49
D 13VH	13mm Drill	49
DB 10DL	Cordless Driver Drill	14
DB 3DA	Cordless Driver Drill	14
DB 3DL2	Cordless Driver Drill	14
DH 22PBS	22mm Rotary Hammer	52
DH 24PG2	24mm Rotary Hammer	52
DH 26PB2	26mm Rotary Hammer	52
DH 26PC2	26mm Rotary Hammer	53
DH 28PBY2	28mm Rotary Hammer	53
DH 28PCY2	28mm Rotary Hammer	53
DH 40MC	40mm Rotary Hammer	54
DH 45MA	45mm Rotary Hammer	54
DH 45ME	45mm Rotary Hammer	54
DH 52MA	52mm Rotary Hammer	55
DS 12DA	Cordless Driver Drill	15
DS 12DA	Cordless Driver Drill	17
DS 18DA	Cordless Driver Drill	15
DS 18DE	Cordless Driver Drill	16
DS 36DC	Cordless Driver Drill	31
DV 10VST	10mm Impact Drill	50
DV 13VSS	13mm Impact Drill	50
DV 16V	16mm Impact Drill	50

F

FCJ 65V3	65mm Jig Saw	73
----------	--------------	----

G

G 10SN2	100mm Disc Grinder	62
G 10SR4	100mm Disc Grinder	62
G 10SS2	100mm Disc Grinder	62
G 10VE2	100mm Disc Grinder	63
G 13SB4	125mm Disc Grinder	64
G 13SR4	125mm Disc Grinder	63
G 13SW	125mm Disc Grinder	64
G 15SA2	150mm Disc Grinder	64
G 1810DA	Cordless Disc Grinder	19
G 1813DA	Cordless Disc Grinder	19
G 18BYE	180mm Disc Grinder	65
G 18SE4	180mm Disc Grinder	66
G 18SH2	180mm Disc Grinder	65
G 18ST	180mm Disc Grinder	65
G 18SW2	180mm Disc Grinder	66
G 23SC4	230mm Disc Grinder	67
G 23ST	230mm Disc Grinder	66
G 3610DA	Cordless Disc Grinder	35
G 3610DVE	Cordless Disc Grinder	36
G 3618DA	Cordless Disc Grinder	37
GP 18DA	Cordless Die Grinder	19
GP 2S2	25mm Hand Grinder	67
GP 3V	25mm Hand Grinder	67

H

H 60ME	Demolition Hammer	58
H 65SB3	Demolition Hammer	58
H 90SG	Demolition Hammer	59
H41 MB2	Demolition Hammer	57
H41 SST	Demolition Hammer	57
H60 MC (V)	Demolition Hammer	57

M

M 12SA2	12mm Router	76
M 12SC	12mm Router	76
M 18DYA	Cordless Cut-Out Tool	26

P

P 18DSL	Cordless Planer	21
P 20ST	82mm Planer	75
PDA-100M	100mm Disc Grinder	62
PDA-125M	125mm Disc Grinder	63
PH 65A	Demolition Hammer	58

R

R 18DSL	Cordless Cleaner	27
RB 18DC	Cordless Blower	22
RB 36DA	Cordless Blower	42
RB 40SA	Blower	78
RH 18DA	Cordless Heat Gun	21
RH 600T	Heat Gun	79
RH 650V	Heat Gun	79

INDEX

S

S 15SB	150mm Sander Polisher	68
SAT 180	180mm Sander Polisher	68
SB 8V2	76mm Belt Sander	69
SP 18VA	150mm Sander Polisher	68
SV 12SG	110mm Orbital Sander	68

T

TOOL KIT	DV 10VST - TOOL KIT	49
----------	---------------------	----

U

UB 18DC	Cordless Work Light	26
UC 12SL	10.8 - 12V Peak Charger	43
UC 18YFSL	14.4V / 18V Charger	43
UC 18YSL3	14.4V / 18V Charger	44
UC 3SFL	3.6V Charger	43
UC 7SL	7.2V Charger	43
UM 12VST2	120mm Mixer	78
UM 16VST2	160mm Mixer	79

V

VTP 18	18mm Impact Drill	50
--------	-------------------	----

W

W 6VA4	6mm Screw Driver	60
WH 12DA	Cordless Impact Driver	17
WH 12DD	Cordless Impact Driver	17
WH 18DA	Cordless Impact Driver	18
WH 18DC	Cordless Impact Driver	18
WH 18DE	Cordless Impact Driver	18
WH 36DC	Cordless Impact Driver	32
WH 7DL	Cordless Impact Driver	16
WR 18DF	Cordless Impact Wrench	24
WR 18DH	Cordless Impact Wrench	24
WR 18DSL	Cordless Impact Wrench	24
WR 22SE	22mm Impact Wrench	60
WR 25SE	25mm Impact Wrench	60
WR 36DF	Cordless Impact Wrench	33
WR 36DG	Cordless Impact Wrench	34

E-TECH LINE

C

CC14SG	Cut-off Machine	91
CM4SD	110mm Cutter	88
CM5SC	125mm Cutter	88

D

D6 SC	6mm Drill	84
DH 20PG	Rotary Hammer	90
DH 26PH	Rotary Hammer	90
DS 18DG	DRIVER DRILL	83
DS12DF	DRIVER DRILL	82
DS18DE	DRIVER DRILL	82
DV12DE	IMPACT DRILL	82

G

G 10MGA	Corded Angle Grinder	84
G 10MGE	Corded Angle Grinder	85
G 10MGF	Corded Angle Grinder	84
G 13MGA	Corded Angle Grinder	85
G 13MGB	Corded Angle Grinder	85
G 18MGA	Corded Angle Grinder	86
GP3SB	Corded Die Grinder	87
GP5SA	Corded Die Grinder	87

H

H60MD	Demolition Hammer	91
-------	-------------------	----

P

P20SG	Planer	89
-------	--------	----

R

RB30SA	Corded Blower	92
RH600TA	Corded Heat Gun	92

S

SP 18VC	Corded Polisher	92
---------	-----------------	----

ACCESSORIES

A

Adapter	Drill Chuck & SDS-plus	115
---------	------------------------	-----

C

Chisels	Sds-Plus, Sds-Max Hex-17, Hex-30	118
Cutting Wheel	Metal Working	100

D

Diamond Wheel	Rim & Segment	111
Driver Bit	Philips & Philips + Slotted	116

F

Fiber Disc	Ai - Oxide / Zikonika	108
Flap/Fibre Discs	Flap Disc - Ai - Oxide	110
Flat Wood Drill Bits	Wide Range 1/4" Hex. Shank	117

G

Grinding	Wire Brush	114
Grinding Wheel	Metal Working	104

H

Hammer Drill Bit	Sds - Plus x 2	120
Hss-G Drill Bits	Metal Working	124

S

Saw Blade	TCT Blades	114
-----------	------------	-----

AC BRUSHLESS MOTOR



Long-lasting efficiency.

The professional no longer has to worry about losing voltage and power when using an extension cord. Our AC Brushless Motor series feature electronic control that offers continuous and constant power output. This technology brings a whole new level of performance and durability to our heavy duty range of power tools. With the innovative AC Brushless Motor you'll experience more power and less energy consumption.

We have also eliminated some major wearing parts, which means a compact and lightweight power tool, less wear and tear and less maintenance. This also contributes to the fact that the motor lasts longer and operates far more efficiently than conventional brushed motors.

HiKOKI

NEVER STOP BUILDING

CORDLESS TOOLS



**MAKE.
MOVE.
GO**

DB 3DL2
3.6V Cordless Driver Drill

Li-ion



Can be converted from L shape to straight shape.

Features

- Convertible to use in angled or straight
- Spindle lock mechanism
- Adjustable clutch: 21-stage torque
- Equipped with battery protection circuit
- With LED light



Specifications		
Drive	6.35mm Hex Bit Shank	
Capacity	Mid Steel	5mm
	Wood Screw (D x L)	3.8 x 38mm
	Machine Screw	5mm
Battery Voltage	3.6V	
No Load Speed	High	600/min
	Low	200/min
Torqure Setting	0.3 - 2.9Nm	
Overall Length	Straight	268mm
	Angled	210mm
Weight	0.45kg	
Standard Accessories*	2 Batteries (EBM315), Charger (UC3SFL), Driver Bit, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 8,760/-

DB 3DA
3.6V Cordless Driver Drill

Li-ion



Can be converted from L shape to straight shape.

Features

- Engineered with Auto- Stop Clutch
- Auto Shut-Off for Smart Battery Protection
- Customizable Control: 21 Clutch Settings
- Power & Portability in the palm of your hands

Specifications	
Voltage	3.6V
Battery Capacity (Ah)	2.0Ah
Max Torque (Nm)	5.0Nm
No-Load Speed (min-1)	High: 600 min-1
	Low: 200 min-1
Clutch Settings	21
Capacity (mm)	Machine Screw: M5
	Drilling Steel: 5mm
	Drilling Wood: 6mm
Performance (%)	M5 Machine Screw: 100%
	Amount of work / battery: 150%
Function	Auto-Stop Clutch
	Auto Shut off
	One-touch Bit Installation
	LED Light / LED
Overall length (mm)	Straight shape: 268mm
	Pistol Shape: 210mm
Weight (with battery)	0.45kg
Included Accessories	Blow Case

*Standard accessories may vary by country or area

MRP: ₹ 15,660/-

DB 10DL
10.8V Cordless Driver Drill

Li-ion



Features

- Adjustable clutch: 21-stage torque
- Soft grip handle
- Compact & light weight



Specifications		
Drive	6.35mm Hex Bit Shank	
Capacity	Soft wood	18mm
	Wood Screw (D x L)	6mm x 38mm
	Machine Screw	6mm
Battery Voltage	10.8V	
No Load Speed	0-400/min	
Maximum Torque in lock	10Nm	
Torque Setting and Clutch	1.0-6.0Nm	
Overall Length	147mm	
Weight	0.8kg	
Standard Accessories*	Battery (BCL1015 / BCL1030C), Charger (UC10SL2), Driver Bit, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 15,660/-

DS 12DA
10.8-12V Peak Cordless Driver Drill

12V PEAK
Li-ion

Features

- 20-stage Clutch
- LED light
- Compact & light weight
- Keyless chuck



MRP: ₹ 20,000/-



Specifications		
Drill Chuck	0.8-10mm Keyless	
Capacity	Mild Steel	10mm
	Soft Wood	29mm
	Wood Screw	5.8mm
Machine Screw	6mm	
Battery Voltage	10.8-12V Peak	
No Load Speed	High	0-1,400/min
	Low	0-350/min
Max Torque Hard	38Nm	
Max Torque Soft	15Nm	
Torque Setting	0.6 -4.0Nm	
Overall Length	166mm	
Weight	1.1kg with BSL1225M/BSL1215	
	1.2kg with BSL1240M	
Standard Accessories*	2 Batteries (BSL1225M), Charger (UC12SL), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

DS 18DA
18V Cordless Driver Drill

Li-ion

Features

- Compact and lightweight
- High capacity battery with battery level indicator
- 20 Stage clutch
- 2 Speed gear



Specifications		
Drill Chuck	2.0-13mm Keyless	
Capacity	Mild Steel	13mm
	Soft Wood	36mm
	Wood Screw (D X L)	6 x 75mm
	Machine Screw	6mm
Battery Voltage	18V	
No Load Speed	High	0-1,400/min
	Low	0-350/min
Max Torque Hard	50Nm	
Max Torque Soft	18Nm	
Overall Length	173mm	
Weight	Kg	
	1.3kg (BSL1820M), 1.9kg (BSL36B18)	
Standard Accessories*	2 Batteries (BSL1820M), Charger (UC18YKSL / UC18YSL3), Driver Bit, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 17,500/-



Brake



Variable Speed



Reversible



2-speed Gear



Brake



Variable Speed



Reversible



2-speed Gear

DS 18DE
18V Cordless Driver Drill



Features

- 155 mm compact head
- Easy to Use in Tight Spaces
- Drills Fast and Easy
- Reactive Force Control

Specifications		
Drill Chuck	1.5 - 13mm Keyless	
Capacity	Brick	13mm
	Mild Steel	13mm
	Soft Wood	52mm
	Wood Screw (DxL)	10x100mm
Machine Screw	6mm	
Battery Voltage	18V	
No Load Speed	High	0-2000/min
	Low	0-550/min
Max Torque	High	70Nm
	Soft	40Nm
Overall Length	155mm	
Weight	1.7kg (with BSL1840M)	
	1.9kg (with BSL1850MA / BSL36A18)	
	2.2kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1840M / BSL1850MA / BSL36A18), Charger (UC18YFSL / UC18YSL3), Driver Bit, Hook, Battery Cover, Carrying Case	

MRP: ₹ 14,620/-
(Bare Tool)-

*Standard accessories may vary by country or area

WH 7DL
7.2V Cordless
Impact Driver

Can be converted from
L shape to straight shape.



Features

- Convertible to use in angled or straight
- Automatic spindle lock mechanism for manual tightening



Specifications		
Capacity	Bolt	3-8mm
	High Tension Bolt	3-6mm
	Small Screw	3-8mm
Drive	6.35mm Hex Bit Shank	
Tightening Torque	25Nm	
Battery Voltage	7.2V	
No Load Speed	0-2,400/min	
Full Load Impact Rate	0-3,000/min	
Overall Length	Straight	282mm
	L shape	211mm
Weight	0.59kg	
Standard Accessories*	Batteries (BCL715), Charger (UC75L), Battery Cover, Carrying Case	

MRP: ₹ 16,140/-

*Standard accessories may vary by country or area

DS 12DA
10.8-12V Peak Cordless
Driver Drill



Features

- 20-stage Clutch
- LED light
- Compact & light weight
- Keyless chuck

MRP: ₹ 20,000/-

WH 12DA
10.8-12V Peak
Cordless Impact Driver



Features

- Slim handle with soft grip
- LED light
- Compact & light weight

MRP: ₹ 10,000/- (Bare Tool)

WH 12DD
10.8-12V Peak
Cordless Impact Driver



Features

- 134mm compact head
- 3 tightening modes (soft/power/self-drilling screw)
- LED Light

MRP: ₹ 22,000/-

Specifications		
Drill Chuck	0.8-10mm Keyless	
Capacity	Mild Steel	10mm
	Soft Wood	29mm
	Wood Screw	5.8mm
	Machine Screw	6mm
Battery Voltage	10.8-12V Peak	
No Load Speed	High	0-1,400/min
	Low	0-350/min
Max Torque Hard	38Nm	
Max Torque Soft	15Nm	
Torque Setting	0.6 -4.0Nm	
Overall Length	166mm	
Weight	1.1kg with BSL1225M/BSL1215	
	1.2kg with BSL1240M	
Standard Accessories*	2 Batteries (BSL1225M), Charger (UC12SL), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

Specifications		
Capacity	Bolt	5-12mm
	High Tension Bolt	5-10mm
	Small Screw	4-8mm
Drive	6.35mm Hex Bit Shank	
Tightening Torque	110Nm	
Battery Voltage	10.8-12V Peak	
No Load Speed	0-2,700/min	
Full Load Impact Rate	0-3,200/min	
Overall Length	150mm	
Weight	1.1kg (with BSL1225M / BSL1215) - 1.2kg (with BSL1240M)	
Standard Accessories*	2 Batteries (BSL1220M / BSL1225M), Charger (UC12SL), Driver Bit, Carrying Case	

*Standard accessories may vary by country or area

Specifications		
Capacity	Bolt	5-14mm
	High Tension Bolt	5-12mm
	Small Screw	4-8mm
	Self drilling Screw	3.5-5mm
Drive	6.35mm Hex Bit Shank	
Tightening Torque	135Nm	
Battery Voltage	10.8-12V Peak	
No Load Speed	Power Mode	0-3,200/min
	Soft Mode	0-1,300/min
	Self Drilling Screw Mode	0-3,200/min
Impact Rate	Power Mode	0-4,000/min
	Soft Mode	0-2,500/min
	Self Drilling Screw Mode	0-4,000/min
Overall Length	134mm	
Weight	1.1kg	
Standard Accessories*	2 Batteries (BSL1240M), Charger (UC12SL), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

WH 18DA
18V Cordless Impact Driver

Li-ion

Features

- Compact and lightweight
- High capacity battery with battery level indicator
- LED light
- Easy to use in tight spaces



Specifications		
Capacity	Machine Screw	4 - 8mm
	Bolt	M5 - M14
	High Tension Bolt	M5 - M12
Tightening Torque	140Nm	
Battery Voltage	18V	
No Load Speed	0 - 2,700/min	
Impact Rate	0 - 3,600/min	
Overall Length	150mm	
Weight	1.3kg (with BSL1820M)- 1.9kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1820M), Charger (UC18YSL3 / UC18YKSL), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 22,000/-

WH 18DC
18V Cordless Impact Driver

BRUSHLESS

Li-ion IP56

TRIPLE HAMMER

Features

- Bright 3 LEDs working light
- Powerful brushless motor delivers fast tightening speed.
- 5 Tightening modes with Triple Hammer
- IP56 dust & water resistance



Specifications		
Capacity	Small Screw	4 - 10mm
	Ordinary Bolt	5 - 18mm
	High Strength Bolt	5 - 14mm
	Self Drilling Screw	ø3.5 - ø6mm
Drive	6.35mm	
Max. Torque	210Nm	
Battery Voltage	18V	
No Load Speed	Soft Mode	0 - 900/min
	Power Mode	0 - 3,400/min
	Bolt Mode	0 - 2,900/min
	Bolt Single Mode	0 - 2,900/min
	Self Drilling Screw Mode	0 - 3,700/min
Weight	1.6kg (BSL36A18), 1.9kg (BSL36B18)	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Battery Cover, Hook, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 42,500/-

WH 18DE
18V Cordless Impact Driver

Li-ion

BRUSHLESS

Features

- Compact, simple and easy to use
- Stays running at low speeds and are suitable for delicate work
- Highly responsive trigger switch



Specifications		
Capacity	Small Screw	4 - 8mm
	Ordinary Bolt	5 - 16mm
	High Strength Bolt	5 - 12mm
Drive	6.35mm	
Tightening Torque	175Nm	
Battery Voltage	18V	
No Load Speed	0 - 3,100/min	
Impact Rate	0 - 3,400/min	
Overall Length	120mm	
Weight	1.5kg (BSL1840M) 1.6kg (BSL1850MA) 1.9kg (BSL36B18)	
Standard Accessories*	Batteries (BSL1840M), Charger (UC18YSL3), Hook, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 18,400/- (Bare Tool)

G 1810DA
18V Cordless 100 mm

Disc Grinder with Slide Switch

Li-ion

BRUSHLESS

Features

- 750W max output
- Small grip circumference
- Easy to maintain mesh dust filter
- Kickback protection
- Restart protection



Specifications		
Capacity	Wheel Dia	100mm
	Hole Dia	16mm
	Thickness	6mm
Spindle Thread	M10 x 1.5	
Battery Voltage	18V	
No Load Speed	8,000/min	
Overall Length	358mm	
Weight	2.4kg (with BSL1850MA) 2.8kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1850MA), Charger (UC18YSL3), Side Handle, Depressed Center Wheel, Wrench, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 35,200/-

G 1813DA
18V Cordless 125 mm

Disc Grinder with Slide Switch

Li-ion

BRUSHLESS

Features

- 750W max output
- Small grip circumference
- Easy to maintain mesh dust filter
- Kickback protection
- Restart protection



Specifications		
Capacity	Wheel Dia	125mm
	Hole Dia	22.23mm
	Thickness	6mm
Spindle Thread	M14 x 2	
Battery Voltage	18V	
No Load Speed	8,000/min	
Overall Length	358mm	
Weight	2.7kg (with BSL1850MA) 3.1kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL1850MA), Charger (UC18YSL3), Side Handle, Depressed Center Wheel, Wrench, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 37,200/-

GP 18DA
Cordless Die Grinder

Li-ion

BRUSHLESS

Features

- Variable speed dial with auto mode
- Brake
- Soft Start
- Overload protection
- Kickback protection



Specifications		
Capacity	Collet Chuck	6mm
	Max. Wheel	50mm
Switch type	Slide (On Side)	
Battery Voltage	18V	
No Load Speed	7,000 - 29,000/min	
Overall Length	464mm (with BSL36A18)	
Weight	2.8kg (With BSL36A18)	
Standard Accessories	2Batteries (BSL36A18), Charger (UC18YFSL), Collet Chuck, Wrenches, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 47,975/-

AC 18DA
Cordless Caulking Gun

Li-ion



Anti-Drip Mechanism

The auto reverse feature prevents unwanted dripping of material when the trigger is released.

Built-in LED Light

Illuminates the work space when used in dark er areas.

Runtime per Charge* (Using BSL36A18 battery)

Silicone Sealant φ5mm Nozzle	Urethane Sealant φ10mm Nozzle	Acrylic Adhesive φ8mm Nozzle
Up to 165 Cartridges	Up to 180 Cartridges	Up to 165 Cartridges

Features

- 3,000N of dispensing force for high viscosity adhesives and sealants.
- Variable speed trigger and speed dial control allow for easy speed adjustment.
- Can be placed upside down with the cartridge inserted when not in use.
- Anti-drip mechanism prevents unwanted dripping of material when the trigger is released.
- LED light.

Specifications		
Voltage	18V	
Dispensing Speed	0 - 14mm/s	
Maximum Dispensing Force		3,000N
Stroke	300ml Holder	216mm
	400ml Holder	
	600ml Holder	340mm
	800ml Holder (for APAC)	
Dimensions (L x W x H)		482 x 82 x 280mm
Weight	3.4kg (with BSL36B18 Battery* and 600ml Holder)	
Standard Accessories	Battery (BSL1820M), Charger (UC18YSL3), 300ml and 400/600ml Holder Set, Protective Glasses, Hook, Battery Cover	

*Standard accessories may vary by country or area

MRP: ₹ 49,223/-

RH 18DA
Cordless Heat Gun

Li-ion LED

Features

- 3,000N of dispensing force for high viscosity adhesives and sealants.
- Variable speed trigger and speed dial control allow for easy speed adjustment.
- Can be placed upside down with the cartridge inserted when not in use.
- Anti-drip mechanism prevents unwanted dripping of material when the trigger is released.
- LED light.

Specifications		
Voltage	18V	
Temperature	I	30 - 400°C
	II	30 - 550°C
Air Volume	I	200L/min
	II	300L/min
Overall Length	217mm (without Battery)	
Weight	1.6kg (with BSL36A18)	
Standard Accessories	1 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3), Nozzle (Plane), Nozzle (Curved Surface), Nozzle (Round)	

MRP: ₹ 32,958/-

*Standard accessories may vary by country or area



P 18DSL
Cordless Planer

Li-ion

Features

- Rabbeting depth: 9mm
- Built-in stand to prevent the blade damaging workpieces.
- Remaining battery indicator lamp
- Optional adaptor to connect an optional dust bag or elbow

Specifications		
Cutting width	82mm	
Dimensions	Length	332mm
	Width	166mm
	Height	160mm
Max. cutting depth	82mm	
Max. rebating depth	9.0mm	
No load speed	16,000 (min-1)	
Weight	3.3kg (with BSL36A18 battery)	
Standard accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), 4 x 82mm reversible TCT blades.	

*Standard accessories may vary by country or area

MRP: ₹ 48,126/-



Equipped with brake
When the switch trigger is released, the brake stops the blade rotation automatically.

Soft grip handle easy to hold
Comfortable operation thanks to anti-slipping, soft grip handle easy to hold.

Remaining battery indicator

Built-in stand to prevent contact between blade and material
When the planer is lifted, the stand is extended from the rear base to prevent the material being damaged by unexpected contact with the blade.

Attachable guide (included)
Using a guide assembly (included) enables easy rabbeting (shiplap-forming) and fine finish.



CORDLESS BLOWER

RB 18DC
Cordless Blower

Li-ion

Features

- 3 air volume settings allow the user to control the volume with ease to suit the application
- Lock-on button for continuous use
- Low vibration ensures less fatigue and comfort for the user
- Can be used as a vacuum with an optional dust bag
- Compatible with 14.4 Lithium-ion Batteries

Specifications	
Voltage	18V
Air Volume Flow (without Nozzle)	0 - 3.5m³/min
Maximum Air Velocity (with Nozzle)	95m/s
Average Air Velocity (with Nozzle)	78m/s
Overall Length	490mm (with BSL36A18)
Weight	1.8kg (with BSL36A18)
Standard accessories*	1 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3), Nozzle

*Standard accessories may vary by country or area



MRP: ₹ 23,818/-



Easy Air Volume Control

The variable speed trigger and three air volume settings allow the user to control the volume with ease to suit the application.



Air Volume Changing Lever

- 3: High
- 2: Medium
- 1: Low

Variable Speed Trigger

Lock-on Button for Continuous Use

CORDLESS IMPACT WRENCH



MAKE. MOVE. GO

HiKOKI

WR 18DF
18V Cordless Impact Wrench



- Features
- Powerful with a max torque of 220Nm
 - High capacity battery with battery level indicator
 - LED light



Specifications		
Capacity	Bolt	M10-M16
	High Tension Bolt	M8-M14
Square Drive	12.7mm	
Tightening Torque	220Nm	
Battery Voltage	18V	
No Load Speed	0-2,400/min	
Impact Rate	0-3,200/min	
Overall Length	177mm	
Weight	1.4kg	
Standard Accessories*	2 Batteries (BSL1820M), Charger (UC18YSL3), Battery Cover, Carrying Case	

MRP: ₹ 13,000

*Standard accessories may vary by country or area

WR 18DH
18V Cordless Impact Wrench



- Features
- 345Nm Tightening Torque
 - 600Nm Nut Busting Torque
 - Variable Speed Control
 - 4-Stage Tightening Mode Selector
 - IP56 Dust & Water Resistant
 - Bright LED Light
 - Compact, Light weight & Well balanced



Specifications		
Capacity	Ordinary Bolt	M10-M20
	High Tension Bolt	M10-M16
Square Drive	12.7mm	
Tightening Torque	345Nm	
Battery Voltage	18V	
No-load rotation speed	Mode 4	0 - 2,800 / min
	Mode 3	0 - 2,400 / min
	Mode 2	0 - 1,800 / min
	Mode 1	0 - 1,200 / min
Full Load Impact Rate	0-3,200/min	
Overall Length	144mm	
Weight	1.3kg (Without battery)	
	2.3kg (BSL36B18X)	
Standard Accessories*	2 Batteries (BSL1850MA), Charger(UC18YFSL), Battery Cover, Carrying case	

MRP: ₹ 43,365/-

*Standard accessories may vary by country or area

WR 18DSDL
18V Cordless Impact Wrench



- Features
- Save mode or Power mode for better control based on the application
 - 12.7mm (1/2") Square bit shank
 - Tightening torque 255Nm



Specifications		
Capacity	Bolt	M10-M18
	High Tension Bolt	M8-M14
Square Drive	12.7mm	
Tightening Torque	Power Mode	255Nm
	Save Mode	140Nm
Battery Voltage	18V	
No Load Speed	Power Mode	0-2,600/min
	Save Mode	0-2,000/min
Full Load Impact Rate	0-3,200/min	
Overall Length	173mm	
Weight	1.5kg (with BSL1830C)- 2.1kg (with BSL1850)	
Standard Accessories*	2 Batteries (BSL1830 or BSL1850), Charger (UC18YFSL / UC18YSL3 / UC18YRSL), Carrying Case	

MRP: ₹ 34,000/-

*Standard accessories may vary by country or area

CR 18DBL
Cordless Reciprocating Saw



- Features
- Brushless motor control allows max speed (SPM) adjustment With auto mode, electricity consumption and noise can be suppressed by lowering the number of maximum strokes during no-load motor operation
 - Tool-less blade change
 - Tool-less shoe adjustment
 - Easy to grip and handle
 - Large pivoting hook conveniently allows for hanging the tool on a φ48mm pipe



Specifications		
Battery Voltage	18V	
Capacity	Mild Steel Pipe	130mm
	PVC Pipe	130mm
	Wood	120mm
	Mild Steel Plate	19mm
No Load Speed	0 - 2,500/min	
Length of Stroke	32mm	
Overall Length	435mm	
Weight	3.4kg*	
Standard Accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), Blade for Wood, Hex. Bar Wrench, Battery Cover, Carrying Case	

MRP: ₹ 52,581/-

*Standard accessories may vary by country or area

CB 18DBL
Cordless Band Saw



- Features
- Auto Mode function
 - Soft start function
 - High speed cutting with a cleaner finish



Specifications		
Battery Voltage	18V	
Capacity	Round pipe (external diameter)	83mm
	Square pipe (WxH)	80x80mm
Cutting Speed	Standard mode	80 - 195 (m/min)
	Auto mode (without load)	120 - 195 (m/min)
Dimensions	Length	413mm
	Width	173mm
	Height	266mm
Blade size	900 x 12.5 x 0.5mm	
Length of Stroke	32mm	
Overall Length	435mm	
Weight	3.6kg (with BSL36A18 battery)	
Standard accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), 1 x 18TPI bi-metal blade, side handle and wrench. 3.6kg (with BSL36A18 battery)	

MRP: ₹ 52,734/-

*Standard accessories may vary by country or area

UB 18DC
Cordless Work
Light



Features

- Brightness adjustable from 700lm to 4,000lm
- IP65 dust and water resistant
- Angle adjustable
- Hanging hook

Specifications	
Battery Voltage	18V
LED (White)	60pcs
USB Port	5V, 1A
Brightness Adjustment Range	700 - 4,000lm
Weight	1.9kg (Without Battery)
Dimensions (L x W x H)	186 x 155 x 276mm
Standard Accessories*	1 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3),

*Standard accessories may vary by country or area

MRP: ₹ 38,517/-



M 18DYA
Cordless Cut-Out Tool



Features

- Lightweight and ergonomic design with a small gripSoft start function circumference at 169mm
- LED light turns on when the tool is activated

Specifications	
Collet Chuck Capacity	3.18mm (1/8") or 6.35mm (1/4")
Battery Voltage	18V
No Load Speed	28,000/min
Dimensions (L x W x H)	259x118x82mm (with BSL1820M)
Weight	1.7kg (with BSL36A18)*
Standard Accessories*	2 Batteries BSL36A18 or BSL1850MA, Charger (UC18YSL3), 2 Collet Chucks, 2 Bits, Wrench, Hook, Battery Cover, Carrying Case

*Standard accessories may vary by country or area

MRP: ₹ 45,897/-



Most Compact and
Lightest in its Class

Featuring a lightweight and ergonomic design with a small grip circumference at 169mm, the M18DYA is nimble and easy to maneuver.



R 18DSL
Cordless Cleaner



Features

- Capable of approx. 29 minutes of continuous use by an optional 3.0Ah-capacity battery
- Powerful dust collection
- High capacity translucent dust case
- Includes crevice nozzle, brush nozzle and squeegee nozzle

Specifications	
Battery Voltage	18V
Dustcase Capacity	670mL
Overall Length	430mm
Weight	1.5kg
Standard Accessories*	2 Battery BSL36A18 or BSL1850MA, Charger (UC18YSL3), Brush Nozzle, Crevice Nozzle, Squeegee Nozzle

*Standard accessories may vary by country or area

MRP: ₹ 23,635/-



INSPIRED BY
JAPANESE
ENGINEERING



MULTI VOLT battery system

**AC POWER.
DC FREEDOM.**

INSPIRED BY

JAPANESE

ENGINEERING



MV
MULTI VOLT

A new generation battery system (BSL36A18), with almost the same size and weight as our 18V 5.0Ah/6.0Ah battery, but it's the technology inside that provides you with the great improvements you need. Doubling voltage provides the optimal power for the MULTI VOLT 36V tools, without the hassle of cords. The MULTI VOLT batteries are compatible with a wide range of 18V cordless tools, which means you can easily switch from one power tool to another. So you're just a simple click away from maximum performance.



SHAPING THE FUTURE OF CONSTRUCTION



SMART BATTERY INDICATOR TECHNOLOGY
A self-diagnosis function not only shows the charge capacity, but also indicates overheating or failure.

DRAIN OUTLET IN FRONT, REAR, AND BOTTOM

MULTIPLE PROTECTION SAFETY AND AN EXTENDED LIFETIME
• Overcharge and over-discharge protection.
• Overload protection to protect the battery and power tool.
• Overheating protection.

HIGH OUTPUT CELLS
Compared to conventional 18V batteries, these new generation cells deliver a higher power output. With 10 cells they provide up to 100% (for the BSL36A18) and 160% (for the BSL36B18) more power.

AUTO SWITCHING TERMINALS 36V / 18V
This function is developed so you can use one battery for all your power tools. It automatically switches from 36V / 2.5 Ah to 18V/5.0 Ah (36V/4.0 Ah to 18V / 8.0 Ah for the BSL36B18) when an 18V power tool is detected.

ADDED WATERPROOFING SHEET INSIDE

COOLING CHASSIS
This intelligently engineered system will give the battery a longer lifetime. While charging, the battery is being cooled, which prevents the cells from getting overheated.

RUBBER SOLE FOR BEST SHOCK ABSORPTION

OUTSTANDING POWER

- 36V Nominal Voltage. Up to 41V after Charging.

The MULTI VOLT 36V battery platform boasts a high power output, with the maximum voltage reaching as high as 41V right after charging. The MULTI VOLT batteries deliver the power to increase productivity and efficiency.

ALL DAY RUNTIME

MULTI VOLT gives you the choice to operate MULTI VOLT tools either cordless with a MULTI VOLT 36V battery or corded with the MULTIVOLT AC Adapter. When a power outlet is available, you can choose to use the AC adapter for unlimited runtime.



BSL36A18 / BSL36B18 MULTI VOLT Battery

Model	BSL36A18	BSL36B18
Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah (dual voltage)	36V - 4.0Ah / 18V - 8.0Ah (dual voltage)
Cooling System	Yes	
Dimensions (L x H x W)	116 x 69 x 76mm	134 x 75 x 83mm
Charging Time	Approx. 32min. (When using the UC18YSL3 charger)	Approx. 52min. (When using the UC18YSL3 charger)
Compatible Products	18V	Existing 18V slide-type tools
	36V	MULTI VOLT 36V tools
Compatible Charger	All chargers compatible with 14.4-36V slide-type Lithium-ion batteries	

GREAT PERFORMANCE IN COLD WEATHER

The MULTI VOLT batteries are guaranteed to work at a temperature as low as -10°C, providing you with peace of mind when you work in cold weather.

CORDLESS DRIVER DRILLS

DS 36DC
MULTI VOLT 36V
Cordless Driver Drill

Li-ion
BRUSHLESS
RFC
REFLECTIVE FORCE CONTROL

Features

- Powerful enough to drill 36mm holes easily
- Continuously drives thick and long screws fast
- 190mm compact head
- Side handle is easy to use and easily adjustable at 11 different positions

Specifications		
Drill Chuck	1.5-13mm Keyless	
Capacity	Mild Steel	20mm
	Soft Wood	118mm
	Wood Screw	16x100mm
	Machine Screw	6mm
Battery Voltage	36V	
No Load Speed	High	0-2,200/min
	Low	0-550/min
Max Torque Hard	155Nm	
Max Torque Soft	100Nm	
Overall Length	190mm	
Weight	2.8kg (with BSL36A18)	
	3.1kg (with BSL36B18)	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Hook, Driver Bit, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area



MRP: ₹ 48,000/-

CORDLESS IMPACT DRIVER

WH 36DC
MULTI VOLT 36V
Cordless Impact Driver

TRIPLE HAMMER IP56

Li-ion BRUSHLESS

Features

- Compact head and lightweight design
- 5 tightening modes for various applications
- Triple LED lights for superior visibility
- IP56 dust & water resistance

Specifications		
Capacity	Small Screw	4 - 10mm
	Ordinary Bolt	5-18mm
	High Tension Bolt	5-14mm
	Self Drilling Screw	ø3.5-ø6mm
Drive	6.35mm Hex Bit Shank	
Max. Tightening Torque	215Nm	
Battery Voltage	36V	
No Load Speed	Soft Mode	0-900/min
	Power Mode	0-3,400/min
	Bolt Mode	0-2,900/min
	Bolt Single Mode	0-2,900/min
	Self Drilling Screw Mode	0-3,700/min
Impact Rate	Soft Mode	0-2,000/min
	Power Mode	0-4,100/min
	Bolt Mode	0-4,100/min
	Bolt Single Mode	0-4,100/min
	Self Drilling Screw Mode	0-2,200/min
Overall Length	114mm	
Weight	1.6kg	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 17,340/-
(Bare Tool)



CORDLESS IMPACT WRENCH

WR 36DF
MULTI VOLT 36V
Cordless Impact Wrench



IP56
BRUSHLESS
Li-ion

Features

- 1,900Nm Tightening Torque
- 2,400Nm Nut Busting Torque
- Variable Speed Control
- 4-Stage Tightening mode selector
- IP56 Dust and Water Resistant*
- Powered by 36V High Performance brushless motor
- Bright LED light

Specifications		
Capacity	Bolt	M12-M36
	High Tension Bolt	M10-M27
Square Drive	19mm	
Tightening Torque	1,900Nm	
Nut Busting Torque	2,400Nm	
Battery Voltage	36V	
No Load Speed	Mode 4	0-1,500/min
	Mode 3	0-1,200/min
	Mode 2	0-900/min
	Mode 1	0-600/min
Full Impact Rate	Mode 4	0-2,600/min
	Mode 3	0-2,200/min
	Mode 2	0-1,900/min
	Mode 1	0-1,600/min
Overall Length	221mm	
Weight	3.9kg (BSL36A18)	
Standard Accessories*	Charger (UC 18YSL3), Battery (BSL36A18) - 2 Nos, stackable case, battery cover.	

*Standard accessories may vary by country or area

* Above image is for illustration purpose only.

MRP: ₹ 52,000/-



CORDLESS IMPACT
WRENCH

WR 36DG
MULTI VOLT 36V
Cordless Impact Wrench

IP56
BRUSHLESS
Li-ion

Features

- 1,400Nm Tightening Torque
- 2,000Nm Nut Busting Torque
- Variable Speed Control
- 4-Stage Tightening mode selector
- IP56 Dust and Water Resistant*
- Powered by 36V High Performance brushless motor
- Bright LED light

Specifications		
Capacity	Bolt	M12-M33
	High Tension Bolt	M10-M24
Square Drive	12.7mm	
Tightening Torque	1,400Nm	
Nut Busting Torque	2,000Nm	
Battery Voltage	36V	
No Load Speed	Mode 4	0-1,500/min
	Mode 3	0-1,200/min
	Mode 2	0-900/min
	Mode 1	0-600/min
Full Impact Rate	Mode 4	0-2,500/min
	Mode 3	0-2,200/min
	Mode 2	0-1,900/min
	Mode 1	0-1,600/min
Overall Length	221mm	
Weight	3.9kg (BSL36A18)	
Standard Accessories*	Charger (UC 18YSL3), Battery (BSL36A18) - 2 Nos, stackable case, battery cover.	

*Standard accessories may vary by country or area
* Above image is for illustration purpose only.

MRP: ₹ 53,000/-



CORDLESS DISC
GRINDER

G 3610DA
MULTI VOLT 36V
Cordless Disc Grinder
with Slide Switch

Li-ion
BRUSHLESS

Features

- Faster grinding & cutting speed
- 146mm grip circumference
- Auto Mode adjusts the speed automatically between high and low speeds depending on the load
- Electronic brake stops the wheel in less than 2 seconds
- Kickback protection system
- Anti-restart protection
- Variable speed control

Specifications		
Capacity	Wheel Dia.	100mm
	Hole Dia.	16mm
Spindle Thread	M10x1.5	
Voltage	36V	
No Load Speed	Transmission Mode	3,000-9,500/min
	Auto Mode	5,500/min
Overall Length	358mm	
Weight	2.6kg	
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Depressed Center Wheel (100mm dia.), Side Handle, Wrench, 2 Battery Covers, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 48,000/-



CORDLESS
DISC GRINDER

G 3610DVE
MULTI VOLT 36V
Cordless Disc Grinder

Li-ion
BRUSHLESS


Features

- 1,500W max output
- Highly durable ball bearings
- Dust and water resistant switch
- After the motor has stopped due to overloading, it continues to run if the load decreases within 1.5 seconds
- Small grip circumference
- Variable speed control with auto mode
- Dual LEDs illuminate both sides of the wheel
- 3 position side handle
- Easy to maintain mesh dust filter
- Kickback protection
- Drop shut-off function
- Restart protection

Specifications		
Battery Voltage	36V	
Capacity	Wheel Dia.	100mm
	Hole Dia.	16mm
	Thickness.	6mm
No Load Speed	AUTO Mode	5,500/min
	Transmission Mode	3,200 - 10,000/min
Spindle Thread	M10 x 1.5	
Overall Length	375mm*	
Weight	2.8kg (with BSL36A18) 3.0kg (with BSL36B18)	
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Wheel Guard, Depressed Center Wheel, Wrench, 2 Battery Covers, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 48,000/-

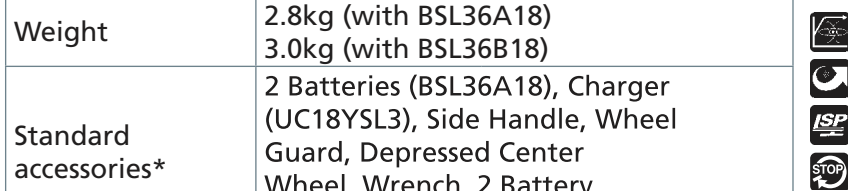

CORDLESS DISC
GRINDER

G 3618DA
MULTI VOLT 36V
Cordless Disc Grinder
with Slide Switch

Li-ion
BRUSHLESS


Features

- High performance with brushless motor
- Trigger switch with ON/OFF lock
- Brake, kickback, anti-restart & soft start function
- Soft grip & anti-vibration side handle
- Tool-less wheel guard

Specifications		
Capacity	Wheel Dia.	180mm
	Hole Dia.	22.23mm
Spindle Thread	M14x2	
Voltage	36V	
No Load Speed	Normal Mode	5,300/min
	Auto Mode	3,200/min
Overall Length	531mm	
Weight	4.7kg (Without Battery)	
Accessories	2 Batteries (BSL36A18), Charger (UC18YSL3), Depressed Center Wheel (180mm dia.), Side Handle, Wrench, 2 Battery Covers, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 35,600/-
(Bare Tool)

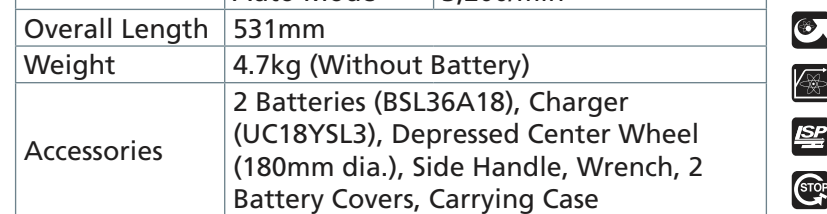

CORDLESS
RECIPROCATING SAW



CR 36DA
MULTI VOLT 36V
Reciprocating Saw

Li-ion
BRUSHLESS
UVP



Features

- Orbital Mode for maximum wood cutting approx. 194% faster cutting speed
- HiKOKI Twin-counterweight System for significant vibration reduction
- Four-mode speed control for a variety of applications
- Tool-less blade change
- Tool-less shoe adjustment
- Durable cylindrical housing
- Large pivoting hook

Specifications		
Battery Voltage	36V	
Capacity	Mild Steel Pipe	130mm
	Vinyl Chloride Pipe.	130mm
	Wood	300mm
	Mild Steel Plate	19mm
No Load Speed	0 - 3,000/min	
Length of Stroke	32mm	
Overall Length	457mm	
Weight	4.5kg with BSL36A18 battery	
Standard accessories*	2 Batteries BSL36A18, Charger (UC18YSL3), Blade, Battery Cover, Carrying Case	

*Standard accessories may vary by country or area

MRP: ₹ 72,017/-



CORDLESS
BRUSHLESS CHAIN SAW



CS 3635DB
MULTI VOLT 36V
Cordless Chain Saw

Li-ion
BRUSHLESS



Features

- Powerful cutting performance
- Highly durable and low vibration thanks to the brushless motor with a direct drive system
- Toolless chain change and adjustment

Specifications	
Battery Voltage	36V
Guide Bar Length	350mm
Chain Speed	14.9m/s
Type of Guide Bar	Sprocket Nose
Chain Pitch	9.5mm
Chain Gauge	1.1mm
Overall Length	760mm
Oil Tank Capacity	100mL
Vibration Total Values (triax vector sum)*	Vibration Emission Value ah -2.4 m/s ² Uncertainty K - 1.5m/s ²
Weight* (with Battery, Saw Chain, Guide Bar)	4.6kg (with BSL36A18)
Standard Accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Side Handle, Wheel Guard, Depressed Center Wheel, Wrench, 2 Battery Covers, Carrying Case

*Standard accessories may vary by country or area

MRP: ₹ 48,000/-



CORDLESS HEDGE TRIMMER


CH 3656DA
MULTI VOLT 36V

Cordless Hedge Trimmer

Li-ion

Features

- Approx. 62.5 min* runtime per charge with MULTI VOLT battery
- Triple-edged and double-sided blade cuts well
- Four speed settings
- Ergonomic shaped sub handle and soft-grip main handle for comfortable hedge cutting in any working position
- Durable aluminum bottom cover
- With a handle shape with good operability that allows you to easily select your working posture, It is ideal for cutting the top and sides of hedges. In addition, we adopted a soft grip that is easy to hold and hard to slip.

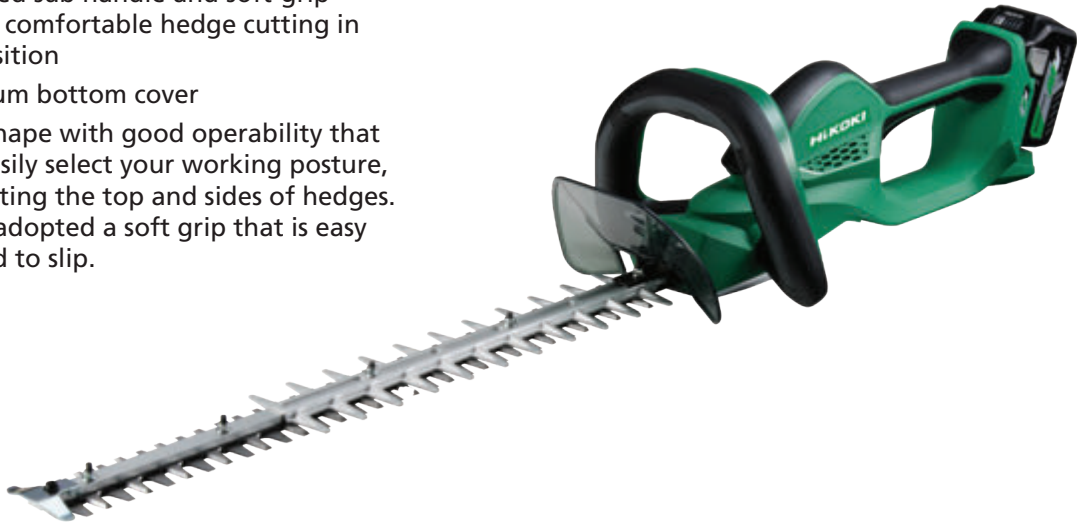

Specifications		
Battery Voltage	36V	
Blade	Length.	620mm
	Effective.	560mm
Blade Pitch	35mm	
Overall Length	1,088mm	
Weight	4.1kg (with BSL36A18)	
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Blade Case, Battery Cover	

*Standard accessories may vary by country or area

MRP: ₹ 51,520/-



CORDLESS GRASS TRIMMER

CG 36DB
MULTI VOLT 36V

Cordless Grass Trimmer

Li-ion

Features

- Well balanced and easy to operate
- Lightweight design
- 3 stage speed control



Specifications		
Battery Voltage	36V	
No Load Speed	Power	6,500/min
	Nomal.	5,500/min
	Eco	4,000/min
Spindle Thread	310mm	
Overall Length	1,803mm	
Weight	4.5kg (with BSL36A18)	
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Nylon Head, Guard, Hex. Bar Wrench (4mm), Box Wrench (Hex. Socket 17/19) Protective Glasses, Shoulder Belt	

*Standard accessories may vary by country or area

MRP: ₹ 62,515/-



CORDLESS BLOWER

RB 36DA
MULTI VOLT 36V
Cordless Blower

Li-ion
BRUSHLESS



Features

- Approx. 9.5min* runtime per charge (when in mode 4)
- 4-mode power settings plus turbo mode
- High-efficiency and durable brushless motor
- The value is for reference purposes. It may vary according to the operating conditions.
- Lightweight and compact design

Specifications	
Battery Voltage	36V
Air Volume	680m3/h (800m3/h when in turbo mode)
Air Velocity	45m/s (53m/s when in turbo mode)
Overall Length	940mm
Weight*	3.5kg with BSL36A18
Standard accessories*	2 Batteries (BSL36A18), Charger (UC18YSL3), Nozzle, Battery Cover

*Standard accessories may vary by country or area

MRP: ₹ 62,515/-



UC 3SFL
3.6V Charger

Features

- Large charge indicator lamp



Specifications		
Charging Voltage	3.6V	
Battery	Type	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

UC 7SL
7.2V Charger

Li-ion

Features

- Large charge indicator lamp with 4 color LED status lights
- Battery capacity lamp (4 stages)
- Low-temperature charge (-10° C and above)



Specifications		
Charging Voltage	7.2V	
Battery	Type	Cassette
	Assortment	Lithium-ion
Fan cooling	No	

UC 12SL
10.8 - 12V Peak Charger

Li-ion

Features

- Compatible with engine generators
- Low-temperature charge (From -10°C)



Specifications		
Charging Voltage	10.8 - 12V Peak	
Battery	Type	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	

UC 18YFSL
14.4V / 18V Charger

Li-ion

Features

- Rapid charging



Specifications		
Charging Voltage	14.4V and 18V	
Battery	Type	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	

The actual charging time can vary depending on the surrounding temperature & battery condition

UC 18YSL3
14.4V / 18V Charger

Li-ion

Features

- Compatible with engine generators
Low-temperature charge (From -10°C)
- High visibility large charge indicator
lamp & full-color LED lights
- USB port (5V, 2A)



Specifications		
Charging Voltage	14.4 and 18V	
Battery	Type	Slide
	Assortment	Lithium-ion
Fan cooling	Yes	

The actual charging time can vary depending on the surrounding temperature & battery condition

CHARGE FASTER.
GO FURTHER.

FAST CHARGER UC36YSL2

Get back to work in no time with the newest HiKOKI Fast Charger. The UC36YSL2 delivers lightning-fast charging, thanks to its advanced cooling system and overcharging and overheating protection. Its bright charge status light makes it easy to check the battery anywhere on the worksite, always signaling that you're ready to start your next project. Go get yours!



* VS. UC18YSL3. When charging a BSL3640MVT/BSL36B18X/BSL36B18 battery.



SHAPING
THE FUTURE OF
CONSTRUCTION

BSL 1850MA
18V Lithium-ion
Slide Battery

Li-ion

Features

- Remaining battery indicator
- Compatible with all HiKOKI 18V
rapid chargers



Specifications	
Voltage & Capacity	18V - 5.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 69 x 76mm
Weight	650g
Compatible Products	All existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V Lithium-ion slide batteries

BSL 1840M
18V Lithium-ion
Slide Battery

Li-ion

Features

- Remaining battery indicator
- Compatible with all HiKOKI 18V
rapid chargers



Specifications	
Voltage & Capacity	18V - 4.0Ah
Cooling System	Yes
Dimensions (L x H x W)	134 x 83 x 54mm
Weight	600g
Compatible Products	All existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V Lithium-ion slide batteries

The actual charging time can vary depending on the surrounding temperature & battery condition

CORDLESS BATTERIES

BSL 1820M
18V Lithium-ion
Slide Battery

Li-ion

Features

- Remaining battery indicator
- Compatible with all HiKOKI 18V rapid chargers



Specifications	
Voltage & Capacity	18V - 2.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 76 x 49mm
Weight	380g
Compatible Products	All existing 18V slide-type tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

BSL 1240M
10.8 - 12V Peak Lithium-ion Slide Battery

12V PEAK
Li-ion



Specifications	
Voltage	10.8 - 12V Peak
Capacity	4.0Ah
Dimensions (L x H x W)	91 x 45 x 74mm
Charging Time	Approx. 60 min (when using the UC12SL)
Compatible Products	UC12SL

BSL 36A18
36V / 18V MULTI VOLT
Lithium-ion Slide Battery

MV
MULTI VOLT
Li-ion

Features

- 1,080W high power output
- Automatic voltage change between 36V 2.5Ah and 18V 5.0Ah depending on the tool's voltage
- Remaining battery indicator
- Full compatibility with the existing 18V slide range and 14.4V-36V slide battery chargers



Specifications	
Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah
Cooling System	Yes
Dimensions (L x H x W)	116 x 69 x 76mm
Charging Time	Approx. 32 min (when using the UC18YSL3)
Compatible Products	All existing 18V slide-type tools MULTI VOLT 36V tools
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

The actual charging time can vary depending on the surrounding temperature & battery condition

Li-ion

Reinventing Power &
Durability.



POWER UP YOUR GEAR



TOOL KIT / DRILLING DRILLS

HIKOKI

10 mm TOOL KIT



Specifications		
Drill Chuck	1.5-10mm	
Capacity	Metal	10mm
	Masonry	10mm
	Wood	20mm
Power Input	550W	
No Load Speed	0-3,000/min	
Dimension(L*W*H)	(290x66x100)mm	
Full Load Impact Rate	0-48,000/min	
Package	BMC	
Weight	1.7kg	
28 Pieces Accessories kit		

MRP: ₹ 6,240/-

D 10VSTA 10mm Drill

375702



Features

- Soft grip handle
- Variable & reversible mode

Specifications		
Chuck Capacity	1.5-10mm	
Capacity	Steel	10mm
	Wood	20mm
Power Input	450W	
No Load Speed	0-3,000/min	
Overall Length	245mm	
Weight	1.3kg	
Standard Accessories	Chuck Wrench	

MRP: ₹ 3,060/-

D 13VH 13mm Drill

999041



Features

- Chuck offset 23.5mm
- Aluminium Gear Cover for durability
- Soft grip handle
- Variable speed by trigger and dial

Specifications		
Chuck Capacity	1.5-13mm Keyed / keyless	
Capacity	Steel	13mm
	Wood	40mm
Power Input	690W	
No Load Speed	Hi: 0-3,000/min Lo: 0-1,000/min	
Overall Length	333mm	
Weight	1.9kg	
Standard Accessories	Chuck Wrench, Side Handle, Depth Stopper	

MRP: ₹ 8,840/-



Double Insulation



Variable Speed



Reversible



2-speed Gear

IMPACT DRILLS

DV 10VST
10mm Impact Drill

374185



Features

- Soft grip for easier handling
- Variable speed trigger to suit multiple drilling application
- Forward & reversible for convenience



Specifications		
Drill Chuck	1.5-10mm	
Capacity	Metal	10mm
	Masonry	10mm
	Wood	20mm
Power Input	550W	
No Load Speed	0-3,000/min	
Full Load Impact Rate	0-48,000/min	
Overall Length	290mm	
Weight	1.7kg	
Standard Accessories	Side Handle, Depth Stopper, Accessory Kit	

MRP: ₹ 3,630/-

DV 13VSS
13mm Impact Drill

999041



Features

- Cylindrical housing for durability
- Offset of chuck: 28mm
- Variable speed by dial & trigger



Specifications		
Drill Chuck	1.5-13mm	
Capacity	Concrete	13mm
	Steel	13mm
	Wood	20mm
Power Input	550W	
No Load Speed	0-2,900/min	
Full Load Impact Rate	29,000/min	
Overall Length	270mm	
Weight	1.4kg	

MRP: ₹ 4,950/-

DV 16V
16mm Impact Drill

999041



Features

- Cylindrical Housing for durability



Specifications		
Drill Chuck	1.5-13mm	
Capacity	Concrete	16mm
	Steel	13mm
Power Input	590W	
No Load Speed	0-2,900/min	
Full Load Impact Rate	34,500/min	
Overall Length	269mm	
Weight	1.5kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case, Chuck Wrench	

MRP: ₹ 7,720/-

VTP 18
18mm Impact Drill

999041



Features

- Metal gear housing
- With 2 speed



Specifications		
Voltage	220V	
Drill Chuck	1.5 - 13mm	
Speed change	1	2
No-load speed	1,050/min	1,800/min
Capacity Steel	13mm	8mm
Capacity Concrete	18mm	10mm
Power Input	640W	
Full Load Impact Rate	17,800-28,600/min	
Overall Length	340mm	
Weight	2.3Kg	

MRP: ₹ 8,950/-



WHEN
CONCRETE
FEELS LIKE
PAPER

DH 22PBS
22mm Rotary Hammer



Features

- 2-mode action: Rotation & Hammering mode and Rotation only mode
- SDS Plus shank
- Variable speed trigger
- Drilling / Hammer Drilling



Specifications		
Capacity	Concrete	22mm
	Mild Steel	13mm
	Wood	25mm
Power Input	620W	
No load RPM	0-1100/min	
Full Load Impact rate	4400/min	
Overall Length	385mm	
Weight	2.8kg	

MRP: ₹ 14,000/-

DH 24PG2
24mm Rotary Hammer



Features

- 2-mode action: Rotation and Hammering mode and Rotation only mode
- Compact design
- Labyrinth Ventilation windows



Specifications		
Capacity	Concrete	24mm
	Mild Steel	13mm
	Wood	32mm
	Core Bit	50mm
Power Input	730W	
Bit Shank	SDS-plus	
No Load Speed	0-1,050/min	
Full Load Impact rate	0-3,950/min	
Overall Length	349mm	
Weight	2.8kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	


MRP: ₹ 15,450/-

DH 26PB2
26mm Rotary Hammer



Features

- 2-mode action: Rotation and Hammering mode and Rotation only mode
- Highest drilling speed
- Labyrinth ventilation windows

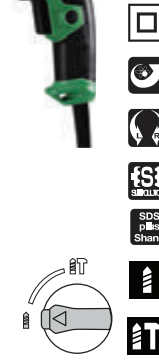

Specifications		
Capacity	Concrete	26mm
	Mild Steel	13mm
	Wood	32mm
	Core Bit	50mm
Power Input	830W	
Bit Shank	SDS-plus	
No Load Speed	0-1,100/min	
Full Load Impact rate	0-4,300/min	
Overall Length	349mm	
Weight	2.8kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	

MRP: ₹ 16,160/-

DH 26PC2
26mm Rotary Hammer



Features

- 3-mode action: Rotation and Hammering mode, Rotation only mode and Hammering mode only.
- Labyrinth ventilation windows
- Compact body



Specifications		
Capacity	Concrete	26mm
	Mild Steel	13mm
	Wood	32mm
	Core bit	25-50mm
Power Input	830W	
Bit Shank	SDS-plus	
No-Load Speed	0-1,100min	
Full Load Impact rate	0-4,300min	
Overall Length	349mm	
Weight	2.8kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	

MRP: ₹ 17,950/-

DH 28PBY2
28mm Rotary Hammer



Features

- 2-mode action: Rotation and Hammering mode and Rotation only mode.
- Lowest vibration in its class through UVP system using dynamic damper
- Labyrinth ventilation windows
- Large mode change lever



Specifications		
Capacity	Concrete	28mm
	Mild Steel	13mm
	Wood	32mm
	Core Bit	50mm
Power Input	850W	
Bit Shank	SDS-plus	
No Load Speed	0-1,100/min	
Full Load Impact rate	0-4,300/min	
Overall Length	360mm	
Weight	3.0kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	

MRP: ₹ 17,280/-

DH 28PCY2
28mm Rotary Hammer



Features

- 3-mode action Rotation and Hammering mode, Rotation only mode and Hammering mode only.
- Lowest vibration in its class through UVP system using dynamic damper
- One push bit mounting



Specifications		
Capacity	Concrete	28mm
	Mild Steel	13mm
	Wood	32mm
	Core Bit	50mm
Power Input	850W	
Bit Shank	SDS-plus	
No Load Speed	0-1,100/min	
Full Load Impact rate	0-4,300/min	
Overall Length	360mm	
Weight	3.0kg	
Standard Accessories	Side Handle, Depth Gauge, Carrying Case	

MRP: ₹ 20,080/-

DH 40MC
40mm Rotary Hammer



999043

Features

- Large change lever
- Multiple bit angle setting.

Specifications		
Capacity	Drill Bit	40mm
	Core Bit	105mm
Power Input	1,100W	
Bit Shank	SDS max	
No Load Speed	620/min	
Full Load Impact rate	2,800/min	
Overall Length	448mm	
Weight	7.1kg	
Standard Accessories	Side Handle, Stopper, Hammer Grease A (30g), Carrying Case	

MRP: ₹ 43,430/-

DH 45MA
45mm Rotary Hammer



999044

Features

- Powerful 1,400W motor delivers the power needed for heavy-duty applications
- Large change lever for easy and smooth mode switching
- Easy to hold large trigger switch

Specifications		
Capacity	Drill bit	45mm
	Core bit	125mm
Power Input	1,400W	
Bit Shank	SDS max	
No Load Speed	380/min	
Full Load Impact rate	2,900/min	
Overall Length	535mm	
Weight	9.4kg	
Standard Accessories	Side Handle, Stopper, Rotary Hammer Grease A, Carrying Case	

MRP: ₹ 60,080/-

DH 45ME
45mm Rotary Hammer



Features

- Maintains the speed and performance even at voltage drop
- Power lamp lights up when the plug is inserted into an outlet
- Large mode change lever
- Large trigger switch

Specifications		
Capacity	Drill bit	45mm
	Core bit	125mm
Power Input	1,500W	
Bit Shank	SDS max	
No Load Speed	220V: 120 - 310/min	
Full Load Impact rate	220V: 1,200 - 2,950/min	
Overall Length	535mm	
Weight	9.0kg	
Standard Accessories	Side Handle, Stopper, Rotary Hammer Grease A, Carrying Case	

MRP: ₹ 72,450/-

DH 52MA
52mm Rotary Hammer



DESIGN AWARDED 2018

Features

- Powerful 1,500W motor delivers the power needed for heavy-duty applications
- Large change lever for easy and smooth mode switching
- Easy to hold large trigger switch

Specifications		
Capacity	Drill bit	52mm
	Core bit	160mm
Power Input	1,500W	
Bit Shank	SDS max	
No Load Speed	330/min	
Full Load Impact rate	2,250/min	
Overall Length	585mm	
Weight	11.8kg	
Standard Accessories	Side Handle, Stopper, Rotary Hammer Grease A, Carrying Case	

MRP: ₹ 74,658/-

- Double Insulation
- Electronic Constant Speed Control
- Slip Clutch
- Shock-Absorbing Handle Type
- SDS max Shank
- SDS max Shank
- 2-speed Gear





INSPIRED BY
JAPANESE
ENGINEERING

DEMOLISHING TOOLS

HIKOKI

H41 SST
Demolition Hammer

LVH



374098

- Features**
- 1,010w high power input
 - Low vibration handle (LVH) for less user fatigue
 - Soft-grip side handle

Specifications	
Power Input	1,010W
Full Load Impact Rate	2,900/min
Bit Shank	17mm Hex
Overall Length	458mm
Weight	5.7kg with side handle, without cord
Standard Accessories	Bull Point, Flat Chisel, Side Handle, Wrench, Grease, Carrying Case

MRP: ₹ 20,790/-

H41 MB2
Demolition Hammer

LVH



999108

- Features**
- Lightweight for less fatigue
 - Resin cylinder case cover
 - Multiple bit-angle settings

Specifications	
Power Input	950W
Full Load Impact Rate	3000/min
Bit Shank	SDS max
Overall Length	427mm
Weight	5.2kg
Standard Accessories	Side Handle, Bull Point, Carrying Case

MRP: ₹ 39,780/-

H60 MC (V)
Demolition Hammer



999044

- Features**
- Easy to change tool by single-step holder
 - Variable lock mechanism to adjust tool at 2-step angle
 - Functional and robust design
 - Variable speed
 - Robust & Sturdy operational suitability

Specifications	
Power Input	1,250W
Full Load Impact Rate	1,600/min
Bit Shank	SDS max
Overall Length	570mm
Weight	11.3kg
Standard Accessories	Side Handle, Carrying Case, Bull Point

MRP: ₹ 55,200/-

Cordless	Chargers/ Batteries	Drilling	Demolition	Fastening	Grinding	Polishing & Sanding	Sawing	Cutting	Planing & Routing	Miscellaneous Pneumatic	E- Tech Line	Accessories
----------	------------------------	----------	------------	-----------	----------	------------------------	--------	---------	----------------------	----------------------------	--------------	-------------

LVH AHB
BRUSHLESS

H 60ME
Demolition Hammer



Features

- Compatible with engine generators
- Power lamp lights up when the plug is inserted into an outlet
- One push action for quick bit mounting
- Tool bit angle adjustment
- Large trigger switch

	Specifications
Power Input	1,500W
Full Load Impact Rate	1,500-2,100/min
Bit Shank	SDS max
Overall Length	585mm
Weight	11.6kg
Standard Accessories	Bull Point, Side Handle, Carrying Case

MRP: ₹ 68,000/-

PH 65A
Demolition Hammer

999044



Features

- Heavy blow chipping mechanism
- Durable tool retainer
- Adjustable side handle

	Specifications
Power Input	1,240W
Full Load Impact Rate	1,400/min
Bit Shank	30mm Hex
Overall Length	642mm
Weight	15.0kg
Standard Accessories	Bull Point, Side Handle, Wrenches, Oil Feeder, Carrying Case

MRP: ₹ 68,440/-

H 65SB3
Demolition Hammer

999086
AUTO STOP



Features

- Due to the large heavyweight (cylindrical) striker, the chisel easily cuts into concrete, which makes users feel more comfortable during demolition work
- Lock-on button allows continuous operation without holding the switch lever
- Soft grip handles for more comfort
- Large switch lever for more control

	Specifications
Power Input	1,340W
Full Load Impact Rate	1,400/min
Bit Shank	30mm Hex
Overall Length	731mm
Weight	18.0kg
Standard Accessories	Bull Point, Carrying Case

MRP: ₹ 89,210/-

UVP AHB

H 90SG
Demolition Hammer

999086



Features

- High demolition performance
- Soft grip handles for more comfort
- Large switch lever for more control

	Specifications
Power Input	110V : 1,560W, 1,670W 120V, 127V : 1,800W 220V, 230V, 240V : 2,000W
Bit Shank	28.5 Hexagon
Full Load Impact Rate	1,000/min
Overall Length	860mm
Weight	32.0kg
Standard Accessories	Hex. Bar Wrench

MRP: ₹ 1,60,680/-

- ☐ Double Insulation
- ☐ Shock-Absorbing Handle Type
- ☐ 28.5mm hex shank



READY FOR ANY
CHALLENGE

SCREW DRIVER / IMPACT WRENCH

W 6VA4
6mm Screw Driver

999091 
AUTO STOP



Features

- Detachable nose piece for easy to change and adjust a bit
- Soft grip handle
- Aluminium gear cover for durability
- Large trigger switch



Specifications		
Capacity	Drywall Screw	6mm
	Self-Drilling Screw	6mm
Bit Shank	6.35mm Hex	
Power Input	620W	
No Load Speed	0-3,000/min	
Overall Length	294mm	
Weight	1.4kg	
Standard Accessories	Driver Bit, Magnetic Bit Holder, Sub Stopper	

MRP: ₹ 16,650/-

WR 22SE
22mm Impact Wrench

Sq
19mm



Features

- Stable performance provided even at voltage drops
- Soft grip handle
- Tumbler-type forward/reverse switch
- Compatible with engine generators



Specifications		
Capacity	Ordinary Bolt	14-24mm
	High Tension Bolt	16-22mm
Tightening Torque	620Nm	
Square Drive	19mm	
Power Input	800W	
No Load Speed	1,400/min	
Impact Rate	2,000/min	
Overall Length	280mm	
Weight	5.2kg	
Standard Accessories	Side Handle, Carrying Case	

MRP: ₹ 60,690/-

WR 25SE
25mm Impact Wrench

Sq
25.4mm



Features

- Stable performance provided even at voltage drops
- Soft grip handle
- Tumbler-type forward/reverse switch
- Compatible with engine generators



Specifications		
Capacity	Ordinary Bolt	22-30mm
	High Tension Bolt	22-24mm
Tightening Torque	1,000Nm	
Square Drive	25.4mm	
Power Input	900W	
No Load Speed	1,100/min	
Impact Rate	1,500/min	
Overall Length	340mm	
Weight	8.4kg	
Standard Accessories	Side Handle, Carrying Case	

MRP: ₹ 94,500/-

AHB
BRUSHLESS

AHB
BRUSHLESS

GET THE
POWER
TOOLS YOU
NEED NOW!



GRINDING
TOOLS



DISC GRINDER

G 10SS2
100mm Disc Grinder with
Slide Switch

999067



Features

- Newly-designed large fan and optimized air flow ensure efficient motor cooling for a long lifetime
- Small grip circumference of 197mm

Specifications		
Capacity	Wheel Dia	100mm
	Hole Dia	16mm
Spindle Thread	M10 x 1.5	
Power Input	600W	
No Load Speed	11,500/min. : 220-240V	
Overall Length	254mm	
Weight	1.7kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 3,900/-

PDA-100M
100mm Disc Grinder
with Snap Switch

999021



Features

- 100mm, 715W mini grinder
- Snap switch easy to use
- Excellent overload durability

Specifications		
Capacity	Wheel Dia	100mm
	Hole Dia	16mm
Spindle Thread	M10 x 1.5	
Power Input	715W	
No Load Speed	12,000/min.	
Overall Length	260mm	
Weight	1.5kg	
Standard Accessories	Depressed Center Wheel, Wrench	

MRP: ₹ 5,700/-

G 10SR4
100mm Disc Grinder
with Slide Switch

999004



Features

- High power 730W motor provides more efficient work

Specifications		
Capacity	Wheel Dia	100mm
	Hole Dia	16mm
Spindle Thread	M10 x 1.5	
Power Input	730W	
No Load Speed	10,000/min	
Overall Length	258mm	
Weight	1.7kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 6,000/-

G 10SN2
100mm Disc Grinder
with Slide Switch

999005



Features

- High power 900W motor provides more efficient work

Specifications		
Capacity	Wheel Dia	100mm
	Hole Dia	16mm
Spindle Thread	M10 x 1.5	
Power Input	900W	
No Load Speed	10,500/min	
Overall Length	266mm	
Weight	1.8kg	
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 7,400/-

DISC GRINDER

HiKOKI

G 10VE2
100mm Electronic
Disc Grinder with
Slide Switch

Features

- 3-position side handle
- Kickback protection
- Durable and dust resistant design
- Small grip circumference for more comfort and control
- Variable speed control
- Restart protection
- Soft Start
- After the motor has stopped due to over loading, it gets auto activated if load reduce within 1.5 seconds



Specifications		
Capacity	Wheel Dia	100mm
	Hole Dia	16mm
	Thickness	6mm
Spindle Thread	M10 x 1.5	
Power Input	1,320W	
Max Power Output	1,900W	
No Load Speed	2,800 - 10,000/min	
Overall Length	309mm	
Weight	1.8kg	
Standard Accessories	Wheel Guard, Side Handle, Wrench	

MRP: ₹ 16,000/-

PDA-125M
125mm Disc Grinder
with Snap Switch

999021



Features

- 125mm, 715W grinder
- Snap switch that is easy to use
- Outer carbon brush for easy maintenance



Specifications		
Capacity	Wheel Dia	125mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	715W	
Overall Length	260mm	
Weight	2.1kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 7,500/-

G 13SR4
125mm Disc Grinder
with Slide Switch

999067



Features

- Newly-designed large fan and optimized air flow ensure efficient motor cooling for a long lifetime
- Small grip circumference of 197mm



Specifications		
Capacity	Wheel Dia	125mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	730W	
No Load Speed	10,000/min.	
Overall Length	258mm	
Weight	1.8kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 6,720/-

DISC GRINDER

G 13SW
125mm Disc Grinder
with Slide Switch

999088



Features

- Max power output 1,600W
- Tool-less wheel guard
- Vibration-Absorbing side handle
- Small grip circumference (202mm) for more control and comfort



Specifications		
Capacity	Wheel Dia	125mm
	Hole Dia	22.2mm
Spindle Thread	M14 x 2	
Power Input	1,200W	
No Load Speed	12,000/min	
Overall Length	277mm	
Weight	2.3kg	
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 8,820/-

G 13SB4
125mm Disc Grinder
with Slide Switch

999088



Features

- Toolless wheel guard
- Excellent overload durability
- Improved dust protection against short circuit



Specifications		
Capacity	Wheel Dia	125mm
	Hole Dia	22.2mm
Spindle Thread	M14 x 2	
Power Input	1,400W	
No Load Speed	11,500/min	
Overall Length	288mm	
Weight	2.4kg	
Standard Accessories	Side Handle, Depressed Center Wheel,Wrench	

MRP: ₹ 9,740/-

G 15SA2
150mm Disc Grinder
with Trigger Switch

999043



Features

- Max power output 2,100W
- 3-position side handle
- New dust seal design



Specifications		
Capacity	Wheel Dia	150mm
	Hole Dia	22.2mm
Spindle Thread	M14 x 2	
Power Input	1,200W	
No Load Speed	8,500/min	
Overall Length	391mm	
Weight	2.8kg	
Standard Accessories	Side Handle, Depressed Center Wheel, Wrench	

MRP: ₹ 13,220/-

LARGE ANGLE GRINDERS



G 18ST
180mm Disc Grinder
with Trigger Switch

999059



Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected from dust and debris through the labyrinth construction
- Large switch lever for more control



Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,000W	
No Load Speed	8,500/min	
Overall Length	469mm	
Weight	4.9kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 10,820/-

G 18SH2
180mm Disc Grinder
with Trigger Switch

999061



Features

- Designed with reliability & robustness
- Increased service life of carbon brush
- Dust proof construction



Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,000W	
No Load Speed	8,500/min	
Overall Length	463mm	
Weight	4.3kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 14,050/-

G 18BYE

BRUSHLESS




Features

- Safety function - Brake function, kickback protection system, 0 voltage restart protection, overload protection & Over heat protection
- Soft start
- Tool less wheel guard
- Detachable filter



Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,200W	
No Load Speed	6600/min	
Overall Length	468mm	
Weight	4kg	
Standard Accessories	Depressed center Wheel, Side Handle, Wrench	

MRP: ₹ 26,700/-



Double Insulation



Spindle Lock



Double Insulation



Spindle Lock

G 18SW2
180mm Disc Grinder
with Trigger Switch

999059



Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected for dust and debris through the labyrinth construction
- Soft grip handle
- Large switch lever for more control



Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,200W	
No Load Speed	8,500/min	
Overall Length	469mm	
Weight	4.9kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 14,500/-

G 18SE4
180mm Disc Grinder
with Trigger Switch

999061



Features

- Small and high power split core motor provides less weight
- Vibration-absorbing side handle
- Tool-less wheel guard



Specifications		
Capacity	Wheel Dia	180mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,400W	
No Load Speed	8,500/min	
Overall Length	492mm	
Weight	5.9kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 16,830/-

G 23ST
230mm Disc Grinder
with Trigger Switch

999059



Features

- Halved stator coils for sufficient cooling efficiency increase motor durability
- Motor is protected for dust and debris through the labyrinth construction
- Large switch lever for more control



Specifications		
Capacity	Wheel Dia	230mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,000W	
No Load Speed	6,600/min	
Overall Length	469mm	
Weight	5.1kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 13,430/-

G 23SC4
230mm Disc Grinder
with Trigger Switch

999061



Features

- Small and high power split core motor provides less weight
- Vibration-absorbing side handle
- Tool-less wheel guard



Specifications		
Capacity	Wheel Dia	230mm
	Hole Dia	22.23mm
Spindle Thread	M14 x 2	
Power Input	2,400W	
No Load Speed	6,600/min	
Overall Length	492mm	
Weight	6.1kg	
Standard Accessories	Side Handle, Wrench	

MRP: ₹ 17,340/-

GP 2S2
25mm Hand Grinder

999088



Features

- All ball bearing construction
- Easy-to-grip housing
- Internal carbon brush



Specifications		
Capacity	Collet Chuck	6mm
	Max. Wheel Dia	25mm
Power Input	520W	
No Load Speed	29,000/min	
Overall Length	359.4mm	
Weight	1.7kg	
Standard Accessories	Side Handle, Wrenches	

MRP: ₹ 14,630/-

GP 3V
25mm Electronic Hand Grinder

BRUSHLESS



Features

- Power Input 760W
- Brushless motor technology
- Variable speed by dial
- Easy to grip housing
- Electronic control soft start & constant speed



Specifications		
Capacity	Collet Chuck	6mm
	Max. Wheel Dia	25mm
Power Input	760W	
No Load Speed	7,000-29,000/min	
Overall Length	406mm	
Weight	1.8kg	
Standard Accessories	Side handle, collet chuck, Wrenches	

MRP: ₹ 19,980/-



S 15SB
150mm Sander Polisher

999043



Features

- Max power output 900W
- A metal bush on a ball bearing for durability
- Soft grip handle



Specifications		
Capacity	Sanding Disc	150mm
Spindle Thread	M16x2	
Power Input	705W	
No Load Speed	4,500/min	
Overall Length	194mm	
Weight	2.0kg	
Standard Accessories	Side Handle, Rubber Pad, Sanding paper, Wrench	

MRP: ₹ 17,860/-

SAT 180
180mm Sander Polisher

999043



Features

- For sanding and polishing
- 2-Speed: High and Low



Specifications		
Capacity	Sanding Disc	180mm
	Wool Bonnet	180mm
Spindle Thread	M14x2	
Power Input	705W	
No Load Speed	Lo: 1,900/min. Hi: 3,400/min	
Overall Length	395mm	
Weight	2.9kg	
Standard Accessories	Side Handle, Rubber Pad, Wool Bonnet, Sanding Discs, Wrenches	

MRP: ₹ 14,400/-

SP 18VA
180mm Electronic Sander Polisher

999043



Features

- Max power output 2,560W
- For sanding and polishing
- Overload protection
- 2 ways of changing speed: Trigger and dial
- Durable bearing design



Specifications		
Capacity	Sanding Disc	180mm
	Wool Bonnet	180mm
Spindle Thread	M14x2	
Power Input	1,250W	
No Load Speed	0-3,400/min.	
Overall Length	415mm	
Weight	2.8kg	
Standard Accessories	Loop Handle, Rubber Pad, Wool Bonnet, Sanding Disc, Wrench	

MRP: ₹ 19,660/-

SV 12SG
110mm Orbital Sander

999041



Features

- Large soft grip for comfort and control
- Dust collection



Specifications		
Capacity	Pad Size	110x100mm
	Orbit Dia.	1.5mm
Power Input	200W	
No Load Speed	Spindle	14,000/min
	Orbit	28,000/min
Overall Length	137mm	
Weight	1.1kg	
Standard Accessories	Sanding Paper, Dust Bag	

MRP: ₹ 6,930/-

SB 8V2
76mm Belt Sander

999043



Features

- Sanding position visible through transparent cover
- Variable speed dial
- Dust bag on the left of the tool body for sanding at corner
- Width 171mm



Specifications		
Capacity	Belt Size	76 x 533mm
Power Input	1,020W	
No-Load Belt Speed	250-450m/min	
Overall Length	318mm	
Weight	4.5kg	
Standard Accessories	Sanding Belt, Dust Bag	

MRP: ₹ 19,660/-

POWERFUL
PROMOTIONS
TO KEEP YOU
GOING



SAWING TOOLS



NEVER STOP
BUILDING

MAKE. MOVE. GO

HiKOKI

SAWING TOOLS

HiKOKI

C 7SS 190mm Circular Saw

999043



Features

- Rigid aluminium base for fine cut
- Side handle easy to grip
- Backward dust emission



Specifications		
Capacity	Blade Dia.	190mm
	Max Cutting depth 90°	68mm
	Max Cutting depth 45°	46mm
Bevel Capacity	0-45°	
Power Input	1,050W	
No Load Speed	5,500/min.	
Overall Length	291mm	
Weight	3.4kg	
Standard Accessories	Blade, Guide, Wrench	

MRP: ₹ 7,830/-

C 7ST 185mm Circular Saw

999043



Features

- Power input 1,710W
- Enhanced max cut depth
- Soft grip handle for reduced vibration & increased comfort



Specifications		
Capacity	Blade Dia.	185mm
	Max Cutting depth 90°	62mm
	Max Cutting depth 45°	47.5mm
Bevel Capacity	0-45°	
Power Input	1,710W	
No Load Speed	6,000/min	
Overall Length	310mm	
Weight	4.3kg	
Standard Accessories	Blade, Guide, Wrench	

MRP: ₹ 12,000/-

C 9SA3 235mm Circular Saw

999038



Features

- 4m cord
- Convenient cord holder
- Aluminium saw cover
- Soft grip handle
- Large knob easy to adjust cut depth



Specifications		
Capacity	Blade Dia.	235mm
	Max Cutting depth 90°	86mm
	Max Cutting depth 45°	65mm
Power Input	2,000W	
No Load Speed	5,200/min	
Overall Length	397mm	
Weight	7.0kg	
Standard Accessories	Blade, Side Handle, Guide, Bolt, Wrench, Dust Collector, Short Lever	

MRP: ₹ 22,000/-



Double Insulation



Spindle Lock



Dust Extracting Type



Blower Function

Cordless
Chargers/
Batteries
Drilling
Demolition
Fastening
Grinding
Polishing &
Sanding
Sawing
Cutting
Planing &
Routing
Miscellaneous
Pneumatic
E - Tech Line
Accessories

C 10FCE2
255mm Compound
Miter Saw

999065



Features

- Thumb actuated positive miter stops for quick and easy adjustment
- Soft grip handle
- Equipped with chip deflector
- Pivoting Sub-Fence for supporting larger stock



Specifications		
Capacity	Blade Dia.	255mm
	(HxW) Cross Cut 0°	59 x 144mm or 89 x 101mm
	(HxW) Miter Cut 45°	59 x 102mm or 89 x 70mm
	(HxW) Miter Cut 52°	59 x 89mm or 89 x 54mm
	(HxW) Bevel Cut 45°	41 x 144mm
	Compound Miter 45° and Beve 45°	41 x 102mm
Power Input	1,520W	
No Load Speed	5,000/min	
Miter Angle:	Right	0 – 52°
	Left	0 – 52°
Bevel Angle	Left	0 – 45°
Positive Miter Angle Stop	0, 15, 22.5, 31.6 and 45°	
Dimensions	460 x 628 x 561mm	
Weight	11.5kg	
Standard Accessories	Blade, Dust Bag, Vise Assy, Sub Fence,Wrenches	

MRP: ₹ 26,100/-

C 12FDHB
305mm Compound
Miter Saw

999065



Features

- Xact Cut LED Shadow Line System - Accurately indicates where the blade will cut on the material
- Compound Cutting - Wide range of miter and bevel cutting options
- Fences - 7" tall sliding fences to support vertically & nested cut molding
- Extra large base for great support & handling of material
- Adjustment - Up-front miter and locks to easily adjust cut angles to best suit the application
- New ergonomic D-handle design for less vibration



Specifications	
Blade Dia.	305mm
Arbor	25.4 mm
No-Load Speed	4,300 RPM
Miter Angle	0-52° L & R
Bevel Angle	0-48° L & R
Cut Capacity at 90°	31.75 x 203mm or 157 x 24mm
Cut at 45° Miter (Left)	32 x109mm or 80 x 20mm
Cut at 45° Miter (Right)	32 x110mm or 100 x 15mm
Cut at 45° Bevel (Left)	0.8 x 203mm
Cut at 45° Bevel (Right)	17 x 203mm
Cut at 45° Miter/Bevel (Left)	20 x109mm
Cut at 45° Miter/Bevel (Right)	109 x17mm
Weight	20 kg

MRP: ₹ 41,000/-

FCJ 65V3
65mm Jig Saw

999041



Features

- Variable speed dial
- Large soft grip for comfortable operation
- Motor with two ball-bearings for longer life and efficient power transmission
- Connectable directly with a dust collector without adapter



Specifications		
Capacity	Wood	65mm
	Mild Steel Plate	6mm
	Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left	
Power Input	400W	
Length of Stroke	18mm	
No-Load Speed(stroke)	0-3,000/min	
Overall Length	197mm	
Weight	1.5kg	
Standard Accessories	Blade, Splinter Guard, Chip Cover, Wrench	

MRP: ₹ 8,550/-

CJ 90VST2
AC 90mm Jig Saw

999041



Features

- Variable speed dial
- Larger lever for quick and easy, tool-less blade change
- 4-mode orbital action
- Soft grip handle
- Powerful dust blower keeps debris away



Specifications		
Capacity	Wood	90mm
	Mild Steel Plate	10mm
	Min. Cutting Radius	25mm
Max Cutting Angle	45° Right/Left	
Power Input	705W	
Length of Stroke	26mm	
No-Load Speed(stroke)	850-3,000/min	
Overall Length	215mm	
Weight	2.2kg (without cord)	
Standard Accessories	Blade, Wrench, Carrying Case, Dust Collector	

MRP: ₹ 11,660/-



CR 13V2
130mm Reciprocating Saw

999043



Features

- High cutting speed with Heavy-duty Motor
- Straight cutting action
- Quick blade change by lever
- Blade mount reversible to cut upward or downward
- Large switch to operate in upside-down
- Newly-designed front cover and handle to hold
- 150mm Curved blade included as standard



Specifications		
Capacity	Pipe	130mm
	Steel Plate	19mm
	Wood	300mm
Power Input	1,010W	
Length of Stroke	29mm	
No Load Speed (stroke)	0-2,800/min.	
Overall Length	435mm	
Weight	3.3kg	
Standard Accessories	Blade, Wrenches, Carrying Case	

MRP: ₹ 21,840/-

CM 4ST
110mm Cutter

999043



Features

- Dust Proof Switch
- Power input 1,300W with overload durability



Specifications		
Capacity	Wheel Dia.	110mm
	Max Cut Depth	34mm
Power Input	1,300W	
No Load Speed	13,000/min	
Overall Length	214mm	
Weight	2.9kg	
Standard Accessories	Wrench	

MRP: ₹ 6,580/-

CM 4SB2
110mm Cutter

999043



Features

- Metal bush on a ball-bearing and sealed armature coil for durability
- Soft grip handle
- Tool-less depth adjustment



Specifications		
Capacity	Wheel Dia.	110mm
	Max Cut Depth	34mm
	Cut Depth per cut	20mm
Power Input	1,320W	
No Load Speed	11,500/min	
Overall Length	204mm	
Weight	2.8kg	
Standard Accessories	Water Plug, Rubber Connector, Wrenches, Vinyl Hose	

MRP: ₹ 6,750/-

CC 14STA
355mm High-Speed
Cut-off Machine

370779



Features

- Lightweight design
- Quick lock vise
- Spark diversion guard
- With Spindle lock mechanism

Specifications	
Capacity : Cut-off Wheel Dia.	355mm
Power Input	2,000W
No Load Speed	3,900/min.
Dimensions (L x W x H)	584 x 287 x 610mm
Weight	14.1kg
Standard Accessories	Cut-off Wheel, Wrench

MRP: ₹ 13,740/-

CC 14STD
355mm High-Speed
Cut-off Machine

370779



Features

- With powerful motor of 2,200W
- With Spindle lock mechanism
- D-shaped handle
- Quick lock vise
- Spark diversion guard

Specifications	
Capacity : Cut-off Wheel Dia.	355mm
Power Input	2,200W
No Load Speed	3,800/min
Max Working Perphera Speed	4,800m/min.
Dimensions (L x W x H)	590 x 300 x 640mm
Weight	17.0kg
Standard Accessories	Cut-off Wheel, Wrench

MRP: ₹ 17,970/-

CC 14STDU
355mm High-Speed
Cut-off Machine

370779



Features

- With powerful motor & Soft start
- With Spindle lock mechanism
- D-shaped handle
- Quick lock vise
- Spark diversion guard

Specifications	
Capacity: Cut-off Wheel Dia.	355mm
Power Input	2,200W
No Load Speed	3,800/min
Max Working Perphera Speed	4,800m/min.
Dimensions (L x W x H)	590 x 300 x 650mm
Weight	17.0kg
Standard Accessories	Cut-off Wheel, Wrench

MRP: ₹ 21,740/-

P 20ST
82mm Planer

999021



Features

- Max cutting depth of 1.5mm
- Compact & light weight
- Rabbeting depth: 9mm
- Easy to adjust cutting depth by knob
- Optional dust bag or elbow can be connected

Specifications	
Capacity: Cutting Width	82mm
Max Cutting Depth	1.5mm
Power Input	580W
No Load Speed	17,000/min
Overall Length	296mm
Weight	2.5kg
Standard Accessories	Blades, Blade Setting Gauge, Guide, Wrench

MRP: ₹ 8,030/-



Double Insulation



Variable Speed



Electronic Constant Speed Control



Brake



Double Insulation



Spindle Lock



Electronic Soft Start Control

M 12SA2
12mm Router

999044



Features

- Fine adjustment by knob and lever
- Soft grip handle
- Improved clutches for collet chuck
- Bench stand available as an optional accessory



Specifications	
Capacity: Collet Chuck	12mm
Stroke	65mm
Power Input	1,700W
No Load Speed	22,000/min
Weight	6.2kg
Standard Accessories	2 Collet Chucks, Centering Gauge Straight Guide, Template Guide, Template Guide Adapter, Dust GuideDust Guide Adapter, Wrench

MRP: ₹ 20,210/-

M 12SC
12mm Router

999043



Features

- Powerful motor 900W
- 6mm Collet chuck
- Compact & light weight



Specifications	
Capacity: Collet Chuck	6X12mm
Stroke	65mm
Power Input	900W
No Load Speed	25,000/min
Weight	3.3kg

MRP: ₹ 12,010/-

AW 100
High Pressure Washer

335549



Features

- Max Pressure 100 Bar & portable
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use



Specifications	
Voltage (by areas)	Single-phase AC 50/60Hz Voltage 220V to 240V
Power Input	1,400W
Max. Discharge Pressure	7.0MPa (1MPa: 10.2 kgf/cm2)
Max Permissible Pressure	10.0MPa
Max Feed Pressure	0.7MPa
Max Water Discharge	5.5L/min
Permissible Temperature	40°C or less
Water Feeding Method	Faucet connection type
Dimensions (L x W x D)	305 x 245 x 465mm
Weight	5.4kg
Standard Accessories	Trigger gun, High-pressure hose (5m), Variable nozzle, Detergent bottle nozzle, Water feed connector, Nozzle cleaner pin, Cord holder, Gun holder, Handle (with 2 attachment screws)

MRP: ₹ 10,970/-

AW 130
High Pressure Washer

335599



Features

- Max Pressure 130 Bar
- Washing of the wide range is possible with a long high-pressure hose
- With wheels and handle for easy movement
- With siphon function
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use



Specifications	
Voltage (by areas)	Single-phase AC 50/60Hz Voltage 220V to 240V
Power Input	1,600W
Max. Discharge Pressure	9.0MPa (1MPa: 10.2 kgf/cm2)
Max Permissible Pressure	13.0MPa
Max Feed Pressure	0.7MPa
Max Water Discharge	6.0L/min
Permissible Temperature	40°C or less
Water Feeding Method	Faucet connection type
Dimensions (L x W x D)	325 x 260 x 790mm
Weight	8.3kg
Standard Accessories	Trigger gun, High-pressure hose (10m), Variable nozzle, Turbo nozzle, Detergent bottle nozzle, One-touch joint (black)(For use with the strainer hose), Water feed connector, Nozzle cleaner pin, Cord holder, Handle (with 4 attachment screws)

MRP: ₹ 18,300/-

AW 150
High Pressure Washer

335599



Features

- Max Pressure 150 Bar
- Washing of the wide range is possible with a long high-pressure hose
- Variable nozzle (Direct injection / Wide angle) can be used with pressure adjustment
- Large hose reel for convenient storage
- With wheels and handle for easy movement
- With siphon function
- Vertical type for easy storage
- Built-in thermal protector
- With handle for easy movement
- Rotary ON/OFF switch for convenient use



Specifications	
Voltage (by areas)	Single-phase AC 50/60Hz Voltage 220V to 240V
Power Input	2,000W
Max. Discharge Pressure	11.0MPa (1MPa: 10.2 kgf/cm2)
Max Permissible Pressure	15.0MPa
Max Feed Pressure	0.7MPa
Max Water Discharge	6.67L/min
Permissible Temperature	40°C or less
Water Feeding Method	Faucet connection type
Dimensions (L x W x D)	425 x 345 x 905mm
Weight	12.4kg
Standard Accessories	Trigger gun, High-pressure hose (10m), Variable nozzle (with pressure adjuster), Turbo nozzle, Detergent bottle (stored inside the unit), One-touch joint (black) (For use with the strainer hose), Water feed connector, Nozzle cleaner pin, Gun holder, Hose handle, Gun support (with 1 attachment screw)

MRP: ₹ 34,320/-



CN 16SA
1.6mm (16 Gauge)
Nibbler



999021

Features

- 3 positive stop die holder allows for straight, right and left cutting
- Downward cutting allows for cutting of trapezoidal metal plate

Specifications		
Capacity	Steel	1.6mm
	Stainless	1.2mm
Capacity: Cutting Width	5mm	
Min. Cutting Radius	40mm	
Power Input	400W	
No Load Speed	2,300/min	
Overall Length	250mm	
Weight	1.6kg	
Standard Accessories	2 Hex.Bar Wrenches	

MRP: ₹ 33,960/-

RB 40SA
Blower



999021

Features

- Soft grip handle
- Stands alone
- Heavy duty for industrial cleaning purpose

Specifications		
Capacity	Air Pressure	5.5kPa
	Air Volume Flow	3.8m3/min
Power Input	550W	
No Load Speed	16,000/min	
Overall Length	447mm	
Weight	1.7kg	
Standard Accessories	Nozzle, Dust Bag	

MRP: ₹ 7,010/-

UM 12VST2
120mm Mixer



333631

Features

- Easy-to-operate soft grip handle
- Optimally-positioned variable speed dial
- Steel frame integrated with the handle
- 0-voltage restart protection and overload protection

Specifications		
Capacity	Max Stirrer Dia.	120mm
Power Input	1,200W	
Tool Spindle Thread	M14	
No Load Speed	High	300 - 650/min
	Low	150 - 300/min
Overall Length	336mm	
Weight	5.4kg	
Standard Accessories	Stirrer	

MRP: ₹ 16,200/-

UM 16VST2
160mm Mixer



333631

Features

- Easy-to-operate soft grip handle
- Optimally-positioned variable speed dial
- Steel frame integrated with the handle
- 0-voltage restart protection and overload protection

Specifications		
Capacity	Max Stirrer Dia.	160mm
Power Input	1,600W	
Tool Spindle Thread	M14	
No Load Speed	High	300 - 650/min
	Low	150 - 300/min
Overall Length	338mm	
Weight	5.7kg	
Standard Accessories	Stirrer, Extension Bar	

MRP: ₹ 18,550/-

RH 600T
Heat Gun



336607

Features

- 2 Heat Settings
- Cool air shot for quick cooling down
- Hanging hook for easy storage and stationary use
- Overheating protection
- Soft grip handle for more control and comfort

Specifications	
Voltage	220V-240V
Power Input	2,000W
Capacity: Wind Volume	0.25/0.5m³/min (2-stage switch)
Capacity: Wind Temperature	450/600°C (2-stage switch)
Wind Temperature (when the cooling button is used)	50°C
Overall Length	245mm
Weight	0.57kg
Standard Accessories*	Nozzle (round), Nozzle (flat), Nozzle (curved surface), Nozzle (glass protector), Scraper (with grip), Carrying Case

*Standard accessories may vary by country or area

MRP: ₹ 2,540/-

RH 650V
Heat Gun



336609

Features

- LCD display for showing temperature and wind power settings
- Continuous adjustable temperature and variable air flow for different applications
- Constant Heat Control for continuous work without overheating
- High stability for stationary use
- Soft grip handle for more control and comfort

Specifications	
Voltage	220V-240V
Power Input	2,000W
Capacity: Wind Volume	0.25/0.5m³/min (5-stage switch)
Capacity: Wind Temperature	50 - 650°C (in increments of 10°C)
Overall Length	245mm
Weight	0.79kg
Standard Accessories*	Nozzle (round), Nozzle (flat), Nozzle (curved surface), Nozzle (glass protector), Scraper (with grip), Carrying Case

*Standard accessories may vary by country or area

MRP: ₹ 6,730/-



TABLE SAW

C 10RJ
AC 254mm Table Saw

Features

- Adjustable rip fence and outfeed support for larger cutting capacity.
- Stable and durable fold and roll stand for easy transportation
- Powerful 1,500W motor



Specifications

Maximum Cutting Capacity	Cutting Depth (90 Degree)	6,500/min
	Cutting Depth (45 Degree)	5,500/min
	Rip fence ext. length (right)	4,000/min
	Rip fence ext. length (left)	559mm
No Load Speed	4,500 (min-1)	
Blade Diameter	254mm	
Blade Bore	30mm	
Dimensions (L x W x H)	920 x 770 x 600mm	
Weight	44kg (includes table)	
Standard accessories*	TCT Saw Blade 254mm, push stick & wrenches	

*Standard accessories may vary by country or area

MRP: ₹ 78,000/-



E-TECH LINE

“EASY USE, EASY APPROACH”



INSPIRED BY
JAPANESE
ENGINEERING

MAKE.
MOVE.
GO



DS18DE



DS12DF



DV12DE

BRUSHED DRILL
DV12DE / DS18DE

BRUSHLESS DRILL
DS12DF

- ✓ Woodworking
- ✓ Masonry
- ✓ Metal
- ✓ Fastening



Specifications

Model			DS12DE	DS12DF	DV12DE
Type			DRIVER DRILL	DRIVER DRILL	IMPACT DRILL
Drilling	Brick		-	-	 (Use for drilling purpose)
	Wood		 (Use for drilling purpose)		
	Steel				
	Aluminum				
Screw Tightening			1 - 19 (Use the bit or socket matching the screw drive)	1 -  (Use after drilling a pilot hole)	
Motor			BRUSHED		BRUSHED
Capacity	Drilling	Brick/Concrete Block (Depth 30mm)	-	-	ø10mm
		Soft Wood (Thickness 38mm)	ø20mm	ø25mm	ø20mm
		Metal (Thickness 1.6mm)	Steel: 10mm		
	Driving	Wood Screw	ø5.8mm x 45mm (L), (Requires a pilot hole)		
		Small Screw	ø6mm		
Drill Chuck Capacity			Maximum Gripping ø 0.8 - 10mm		
Standed Accessories			2 x BCL1220:Li-ion 12V (2.0Ah), 1 x Charger - UC12SFL, Plastic case.		
No-load speed (rpm)			Low: 0-350 High: 0-1,300	Low: 0-500 High: 0-1,600	Low: 0-350 High: 0-1,300
Impact drilling / Max. Ø mm			-	-	Masonry: 10 Concrete Block: 10
Power Tool Weight			0.8kg	0.74kg	0.85kg
MRP:			7,699/-	9,199/-	7,999/-

CORDLESS DRIVER DRILL

DS 18DG
18V

Li-ion
BRUSHLESS



Features

- **Brushless Motor Technology** - Enhances efficiency and extends tool life by reducing friction and heat.
- **High Torque Output** - Delivers max torque of 60Nm and 27Nm (hard/soft), ideal for heavy-duty work.
- **Versatile Applications** - Supports various attachments such as drill bits and impact bits for multiple uses.
- **2-Speed Gearbox** - Offers both low-speed high-torque and high-speed modes, increasing functionality and work efficiency.
- **Soft Grip Design** - Ergonomically designed grip for comfortable use during extended periods.
- **Built-in LED** - light improves visibility in dark or confined workspaces.

Specifications	
Motor	Brushless
Max Drilling Capacity	13mm
Torque (Soft/Hard)	60 / 27 Nm
No-load Speed (rpm)	1st Gear: 0-450 / 2nd Gear: 0-1,900
Impact Rate	1st Gear: 0-7,200 / 2nd Gear: 0-30,400
Torque Settings	23 + 2
Weight (kg)	Approx. 1.3
Max Screw Diameter (mm)	Wood: 38 / Metal: 13
Packaging	Box

MRP: ₹ 12,899/-

D6 SC
Corded Drill



Features

- Compact yet powerful equipped with 320W motor
- Forward and Reverse function
- Light weight upto 1.9kg
- Best suited for Screwing and light duty drilling applications

Specifications	
Voltage	220-240V 50/60Hz
Power	320W
No-load Speed	0-4,200rpm
Capacity Steel	ø 6.5mm
Capacity Wood	ø 15mm
Overall Length	210mm
Weight	1.7kg

MRP: ₹ 2,135/-

G 10MGF
Corded Angle Grinder 4"



Features

- 850W power with 11,000 rpm speed
- Works on 220~240V, 50/60Hz
- Lightweight – only 1.8kg with 100mm disc
- Includes guard, handle, and wrench

Specifications	
Voltage	220-240V 50/60Hz
Power	850W
No-load Speed	11000rpm
Disc Diameter	100mm
Weight	1.8kg
Accessories	Disc Guard D100mm Handle, Wrench

MRP: ₹ 2,868/-

G 10MGA
Corded Angle Grinder 4"



Features

- 700W power with 11,000 rpm speed
- Works on 220~240V, 50/60Hz
- Lightweight – only 1.7kg with 100mm disc
- Includes guard, handle, and wrench

Specifications	
Voltage	220V-50Hz
Power	700W
Blade Diameter	100mm
No-load Speed	11000rpm
Spindle	M10
Dimensions (mm)	335.7 × 223.4 × 105.3
Weight	1.7kg

MRP: ₹ 3,299/-

G 10MGE
Corded Angle Grinder 4"



Features

- 1100W power with 11,000 rpm speed
- Works on 220~240V, 50/60Hz
- Lightweight – only 1.94kg with 100mm disc
- Includes guard, handle, and wrench

Specifications	
Voltage	220V-50Hz
Power	1100W
Blade Diameter	100mm
No-load Speed	11000rpm
Spindle	M10
Dimensions (mm)	335 × 222 × 106
Weight	1.94kg

MRP: ₹ 4,699/-

G 13MGA
Corded Angle Grinder 5"



Features

- 880W power with 11,000 rpm speed
- Works on 220~240V, 50/60Hz
- Lightweight – only 1.98kg with 125mm disc
- Includes guard, handle, and wrench

Specifications	
Voltage	220V-50Hz
Power	880W
Blade Diameter	125mm
No-load Speed	11000rpm
Spindle	M14
Dimensions (mm)	337 × 233 × 105
Weight	1.98kg

MRP: ₹ 4,299/-

G 13MGB
Corded Angle Grinder 5"



Features

- 1200W power with 11,000 rpm speed
- Works on 220~240V, 50/60Hz
- Lightweight – only 2.07kg with 125mm disc
- Includes guard, handle, and wrench

Specifications	
Voltage	220V-50Hz
Power	1200W
Blade Diameter	125mm
No-load Speed	11000rpm
Spindle	M14
Dimensions (mm)	357 × 222 × 106
Weight	2.07kg

MRP: ₹ 5,099/-

CORDED ANGLE GRINDER

7"

G 18MGA



Features

- **Powerful 2600W Motor** - Delivers high performance for heavy-duty grinding and cutting tasks with ease.
- **Large 180mm Blade Diameter** - Covers more surface area, improving work efficiency and cutting speed.
- **Optimized Air Duct Design** - Enhances cooling for better performance and longer motor life.
- **3-way Handle for Better Control** - Ergonomic multi-position handle ensures comfortable and stable handling.
- **Built-in Safety Features** - Equipped with an anti-misoperation switch for safe and secure operation.

Specifications	
Voltage	220V-50Hz
Power	2600W
Blade Diameter	180mm
No-load Speed	8400/min
Spindle	M14
Dimensions (mm)	488×108×135
Weight	5.8kg

MRP: ₹ 9,599/-



Super Power,
Super Durable

INSPIRED BY
JAPANESE
ENGINEERING

CORDED DIE GRINDER

GP3SB AND GP5SA



Aerodynamic Duct Design
Improve Motor lifetime



Ergonomically Design
Reduce Fatigue for Long Time Use

Features

- **High-Speed Performance** - GP3SB runs at 34,000 rpm, while GP5SA offers 29,000 rpm- ideal for precision grinding.
- **Compact & Lightweight** - Both models weigh just 1.81kg, making them easy to handle for extended use.
- **Versatile Capacity** - Supports up to 25mm wheel diameter and 6mm collet for various applications.
- **Durable Build** - Strong motor with 550W power ensures consistent performance.
- **Switch Position Options** - GP3SB features a back switch, while GP5SA comes with a side switch for user preference and comfort.

Model	GP3SB	GP5SA
Voltage	220-240V 50/60Hz	220-240V 50/60Hz
Power	550W	550W
Switch	Back switch	Side switch
Max Wheel Dia.	25mm	25mm
Max Collet Dia.	6mm	6mm
No Load Speed	34000rpm	29000rpm
Dimensions (mm)	442×72×72	456×72×72
Weight	1.81kg	1.81kg

MRP: ₹ 5,299/-

MRP: ₹ 5,599/-

CORDED MARBLE CUTTER

CM4SD AND CM5C
110mm and 125mm



CM4SD

1320W

13000rpm

Thick Base

High Speed

CM5SC

1400W

12000rpm

Less Noise

Save Electricity

External Carbon Brush

Half Gear Cover

Spindle Lock

Large Base

Features

- **Suitable for Multiple Applications** - Designed for versatile use across different tasks and materials.
- **Powerful Copper Core Motor** - Ensures efficient cutting with stable and strong performance.
- **Hardened Steel Gears** - Reduces wear, delivers high-speed operation without slippage.
- **Advanced Cooling System** - Cold circulation design prevents overheating with rapid airflow and dust protection.
- **Superior Build Quality** - Premium craftsmanship ensures durability and reliability in every detail.

Model	CM4SD	CM5SC
Power Input	1320W	1400W
No-Load Speed	13000rpm	12000rpm
Blade (Ø)	110mm	125mm
Max. cutting depth	32mm	39mm
Size	230 x 196 x 157	230 x 196 x 157
Weight	3.1kg	3.2kg
Standard Accessories	Box wrench, wrench, color box	

MRP: ₹ 5,299/-

MRP: ₹ 5,799/-

CORDED PLANER

P20SG

Smooth Operation,
Fast Planing



Easy planing of various types of wood

Misoperation switch for safety and reliability

High-precision adjustment knob for easy depth control

Features


- **Efficient 560W Motor** - Provides a high no-load speed of 16,500 rpm for smooth and precise planing.
- **80mm Planing Width with 1mm Depth** - Ideal for detailed woodworking and accurate surface finishing.
- **Lightweight Design** - Weighs only 2.6kg (excluding cable) for easy handling and reduced fatigue.
- **Comes with Useful Accessories** - Includes guide ruler, sleeve wrench, knife holder, sharpening holder, and carbon brush.

Specifications	
Voltage	220V-50Hz
Planing Width	80mm
Planing Depth	1mm
No-load Speed	16500/min
Power	560W
Net Weight	2.6kg (excluding cable)
Accessories	Guide ruler, sleeve wrench, knife holder, sharpening holder, carbon brush

MRP: ₹ 6,099/-

* For stone application with max 32mm(CM4SD) & 39mm (CM5SC) cutting depth.

DH 20PG
Rotary Hammer



- Features**
- 550W motor for efficient and reliable drilling performance
 - SDS-PLUS shank for quick and secure bit changes
 - Variable speed range of 0–1250 rpm for precise control
 - Drilling capacity: ø13mm (steel), ø32mm (wood), ø20mm (concrete)



Specifications	
Power input	550W
Shank type	SDS-PLUS
No-load speed	0-1250rpm
Capacity - Steel	ø 13mm
Capacity - Wood	ø 32mm
Capacity - Concrete	ø 20mm
Weight	2.6kg

Coming Soon...

DH 26PH
2 Mode Rotary Hammer



Specifications	
Power input	1010W
No-load speed	1000rpm
Full-load speed	4600/min
Shank type	SDS-PLUS
Max drill capacity	26mm
Size	370 x 80 x 235
Weight	4.6kg
Feature	Double insulation
Standard accessories	Plastic case

MRP: ₹ 11,099 /-



- Features**
- 1010W power for drilling & hammering.
 - UVP for low vibration & comfort.
 - Durable metal chuck for firm grip.
 - Ventilated design to avoid heat-up.

H60MD
Demolition Hammer



- Features**
- Powerful 1500W motor for heavy-duty performance
 - High impact rate of 1000–2050/min for fast material removal
 - Compact 594mm body for better handling and control
 - Durable build with 10.6kg weight for enhanced stability during operation

Specifications	
Power	1500W
Impact Rate	1000 - 2050/min
Overall Length	594mm
Weight	10.6kg

Coming Soon...

CC14SG
14" Cut-off Machine



- Features**
- 2200W motor with 4200rpm speed.
 - 355mm blade for smooth steel cutting.
 - Large base & depth limiter for precision.
 - Protective cover & fan for safety & cooling.

Specifications	
Maximum Blade Diameter	355mm
Blade Thickness	3.2mm
Blade Inner Diameter	25.4mm
Power Supply	220V-50Hz
Rated Input Power	2200W
No-load Speed	4200r/min
Weight	14.8kg
Accessories	Wrench

MRP: ₹ 14,299/-



SP 18VC
Corded Polisher



Features

- 1200W motor with 180mm pad for wide, powerful polishing.
- Velcro pad & spindle lock for quick accessory change.
- Lightweight, ergonomic design with G-handle for better control.
- Removes swirls & scratches; built for tough, long-term use.

Specifications	
Voltage	220V-50Hz
Power	1200W
No-load Speed	600-3300rpm
Spindle	M14
Dimensions (mm)	420 x 116 x 93
Weight	2.9kg

MRP: ₹ 8,299/-

RH600TA
Corded Heat Gun



Features

- Dual heat settings: 450°C / 600°C with 2-speed airflow.
- Delivers instant hot air up to 600°C at 500 L/min.
- Lightweight (0.45 kg) with ergonomic pistol grip.
- Durable build with 3-in-1 toggle for easy use.

Specifications	
Voltage	220-240V 50/60Hz
Power	2000W
Air Flow	300/500L/min (2-stage switch)
Temperature	450/600°C
Power Cord Length	2m
Dimensions (mm)	220 x 80 x 234mm
Net Tool Weight	0.45kg

MRP: ₹ 2,199/-

RB30SA
Corded Blower



Features

- 550W motor delivers powerful, uniform airflow.
- Compact, ergonomic design for fatigue-free use.
- Lock-on switch & trigger for easy operation.
- Durable body with flexible nozzle for tight spaces.

Specifications	
Voltage	220-240V 50/60Hz
Power	550W
No-load Speed	16000rpm
Volume Flow (Without Nozzle)	0-3.4m3 /min
Air Velocity (Without Nozzle)	0-89m/s
Weight	1.7kg

MRP: ₹ 3,699/-

HIKOKI



ACCESSORIES

The company behind the power tools.

HIKOKI, a leading power tool company under the diversified KOKI group since 1948, offers customers immediate access to cutting-edge advancements in metallurgy, motor design, and electronics. With a strong focus on innovation, HIKOKI develops and applies the latest technologies through extensive Research & Development programs, ensuring high-quality machines.

The company's global distribution network guarantees excellent products for professional users, complemented by a wide range of top-quality accessories that optimize performance. HIKOKI's independence in the market allows for selective development, resulting in innovative accessories at competitive prices. Dedicated to providing professionals with efficient, durable, and superior tools, HIKOKI constantly seeks new and innovative solutions.



CONTENTS.
EVERYTHING
TO REACH
THE HIGHEST
PERFORMANCE.

MAKE.
MOVE.
GO

HiKOKI

INDEX		
CUTTING WHEEL	Page	
 METAL WORKING	100	
GRINDING WHEEL	Page	
 METAL WORKING	104	
FIBER DISC	Page	
 AI - OXIDE / ZIKONIKA	108	
FLAP / FIBRE DISCS	Page	
 FLAP DISC - AI - OXIDE	110	
DIAMOND WHEEL	Page	
 RIM & SEGMENT	111	
SAW BLADE	Page	
 TCT BLADES	114	
GRINDING	Page	
 WIRE BRUSH	114	
ADAPTER	Page	
 DRILL CHUCK & SDS-PLUS	115	
DRIVER BIT	Page	
 PHILIPS & PHILIPS + SLOTTED	116	
FLAT WOOD DRILL BITS	Page	
 WIDE RANGE 1/4" HEX. SHANK	117	
CHISELS	Page	
 SDS-PLUS, SDS-MAX HEX-17, HEX-30	118	
HAMMER DRILL BIT	Page	
 SDS - PLUS X 2	120	
HSS-G DRILL BITS	Page	
 METAL WORKING	124	



Grinding Discs

Abrasive Cutting and Grinding Discs

- 1 Type and dimensions
- 2 Item number
- 3 Areas of use
- 4 Color code
- 5 Safety recommendations
- 6 Restrictions on use
- 7 Maximum peripheral velocity / RPM
- 8 European standards



Cut's all

HiKOKI Proline Abrasive wheels are selected to offer maximum performance, lifetime, clean cutting areas, the lowest burr formation and low thermal load on the work piece. Cut-off wheels in standard widths offer not only the most economical solution, but also ultimate safety due to the maximum lifetime and stability. The wheels are specifically designed for cutting solid materials, pipes, and profiles made from steel and stainless steel, including cast iron.

2-in-1 wheels

The unique composition also guarantees a long life-time whilst cutting in metal, where usual wheels for Inox wear-out too fast. Important note; after having cut with this type of wheels in Metal, you can't go back cutting Inox because of contamination.

Quality levels

Selecting the right disc and power tool for the material to be cut is crucial. To help selecting the right product, HiKOKI offers 3 quality levels in The professional that frequently cuts with the stronger range of angle grinders will benefit most from the Premium*** wheels. The harder grains and strong bond provide a long life-time and fast burr free cutting. When cutting occasionally or with angle grinders in the lower wattage range, choose for the Basic* range. The economic price/ quality ratio makes this a universal product that can be used in a wide range of applications.

The HiKOKI wheels convince through outstandingly smooth running resulting in optimum handling. Its exceptional

precise, clean and almost burr-free cut reduces reworking to almost zero. Its narrow cut also means that hardly any contact pressure is needed, making for noticeably easier work.

oSa

oSa stands for "Organization for the Safety of Abrasives". Tools with the oSa trademark symbol have been manufactured according to the worldwide strict guidelines of the oSa.



CUTTING WHEEL - FOR METAL WORKING



- WARNING
- TYPE & DIMENSIONS
- COLOR CODE
- ITEM NUMBER
- RESTRICTIONS ON USE
- SAFETY RECOMMENDATIONS
- AREAS OF USE

	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
 Cutting Wheel - For Metal	796158	4	100	1.0	16.0	50	1,730
	Application & features - Reliable standard series designed for general-purpose cutting. 1mm thickness for less material loss - Offers stable cutting performance with minimal vibration. - Cost-effective solution for everyday metalworking.						

	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
 Cutting Wheel - For Metal	796180	4	100	2.0	16.0	50	2,750
	796181	4	100	3.0	16.0	25	1,550
	796182	5	125	3.0	22.2	50	4,240
	796183	7	180	3.0	22.2	50	6,050
	Application & features - Reliable standard series designed for general-purpose cutting. - Thicker wheel construction for durability and heavy-duty applications. - Offers stable cutting performance with minimal vibration. - Cost-effective solution for everyday metalworking						

CUTTING WHEEL - FOR METAL WORKING



	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
 Cutting Wheel - For Metal	702140	4	100	2.0	16.0	25	1,560
	702160	5	125	3.0	22.2	25	2,440
	702190	9	230	3.0	22.2	25	4,370
	Application & features - Reliable standard series designed for general-purpose cutting. - Thicker wheel construction for durability and heavy-duty applications. - Offers stable cutting performance with minimal vibration. - Cost-effective solution for everyday metalworking.						

	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
 Cutting Wheel - For Metal	796260	4	105	1.2	16.0	50	2,800
	796261	7	180	1.6	22.2	40	5,520
	796262	9	230	1.9	22.2	40	9,200
	Application & features - For professional use requiring both fast cutting and long wheel life on steel and stainless steel. - High-performance cutting wheel designed for professional use. - Delivers fast cutting speed with long wheel life. - Balanced hardness for both sharpness and durability. - Provides smooth, comfortable operation with reduced operator fatigue.						

	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
 Cutting Wheel - For Metal	796245	4	107	1.0	16.0	50	1,560
	796243	14	355	3.0	25.4	25	6,300
	Application & features - Reliable standard series designed for general-purpose cutting. - Thicker wheel construction for durability and heavy-duty applications. - Offers stable cutting performance with minimal vibration. - Cost-effective solution for everyday metalworking.						

CUTTING WHEEL - FOR METAL WORKING

 	PART NO.							
	Cutting Wheel - For Metal							
	★★	796190	14	355	3.0	25.4	25	2,875
		Application & features - Reliable standard series designed for general-purpose cutting. - Offers stable cutting performance with minimal vibration. - Cost-effective solution for everyday metalworking.						

 	PART NO.							
	Cutting Wheel - For Metal							
	★★	702114	14	355	2.8	25.4	25	7,350
		EN12413 For INOX / METALS Application & features - Optimised 2.8 mm thickness delivers light-load, fast cutting with minimal vibration. - Designed for smooth, clean edge finishes. - Delivers consistent cuts with high operator comfort and less fatigue. - Engineered for steel, stainless steel and cast iron cutting with chop-saws. - Balances high cutting speed with reliable wheel life in demanding environments						



14"

EN12413

For INOX / METALS

MAKE. MOVE. GO



GRINDING WHEEL - FOR METAL WORKING



TYPE & DIMENSIONS

COLOR CODE

SAFETY RECOMMENDATIONS

AREAS OF USE

  	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
Grinding Wheel - For Metal & Stainless Steel							
	★★ C414033A	4	100	4.0	16.0	25	1,510
Application & features - Professional Series for fast Grinding and superior finish. - Ideal for grinding steel and stainless steel.							

 	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
Grinding Wheel - For Metal							
	★★ 796179	4	100	6.0	16.0	25	1,440
Application & features - Standard series designed for general-purpose grinding. - Thick and durable wheel structure suitable for heavy-duty applications. - Provides stable grinding performance with smooth operation. - Offers reliable performance and good value for everyday metalwork.							

GRINDING WHEEL - FOR METAL WORKING



 	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
Grinding Wheel - For Metal							
	★★ 701040A	4	100	6.0	16.0	25	1,540
Application & features - Professional Series for fast Grinding and superior finish. - Thick and Durable wheel structure suitable for heavy duty application.							

 	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
Grinding Wheel - For Metal							
	★★ 700125	5	125	6.0	22.2	25	2,310
	700150	6	150	6.0	22.2	10	1,200
	701070A	7	180	6.0	22.2	10	1,300
	701090	9	230	6.0	22.2	10	2,320

 	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
Grinding Wheel - For Metal							
	★★ 796263	5	125	6.3	16.0	25	3,125
Application & features - Ideal for grinding steel, cast iron. - Professional Series for fast Grinding and superior finish.							

GRINDING WHEEL - FOR METAL WORKING

Cordless
Chargers/ Batteries
Drilling
Demolition
Fastening
Grinding
Polishing & Sanding
Sawing
Cutting
Planing & Routing
Miscellaneous Pneumatic
E - Tech Line
Accessories

 	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
Grinding Wheel - For Metal							
	★★ 796172	7	180	6.7	22.2	25	3,420
Application & features - Standard series designed for general-purpose grinding. - Thick and durable wheel structure suitable for heavy-duty applications. - Provides stable grinding performance with smooth operation. - Offers reliable performance and good value for everyday metalwork.							

 	PART NO.	Dia (Inch)	Dia (mm)	Th (mm)	Bore (mm)	Qty (Pcs)	MRP (INR)
Grinding Wheel - For Metal							
	★★ NEW 796264	7	180	6.7	24	25	3,099
Application & features - Standard series designed for general-purpose grinding. - Thick and durable wheel structure suitable for heavy-duty applications. - Provides stable grinding performance with smooth operation. - Offers reliable performance and good value for everyday metalwork.							





TYPE & DIMENSIONS

AREAS OF USE

COLOR CODE

	PART NO.	Dia (Inch)	Dia (mm)	GRIT	Qty (Pcs)	MRP (INR)
Sander Disc - Fiber Disc - AI -OXIDE						
	796129	4	100	120	10	370
	796125	4	100	24	10	460
	796126	4	100	36	10	390
	796127	4	100	60	10	425
	796128	4	100	80	10	415

	PART NO.	Dia (Inch)	Dia (mm)	GRIT	Qty (Pcs)	MRP (INR)
Sander Disc - Fiber Disc - AI -OXIDE						
	796134	5	125	120	10	430
	796142	5	125	120	10	350
	796130	5	125	24	10	550
	796131	5	125	36	10	470
	796132	5	125	60	10	470
	796140	5	125	60	10	460
	796133	5	125	80	10	450
	796141	5	125	80	10	460

	PART NO.	Dia (Inch)	Dia (mm)	GRIT	Qty (Pcs)	MRP (INR)
Sander Disc - Fiber Disc - AI -OXIDE						
	796139	7	180	120	10	945
	796135	7	180	24	10	1,070
	796136	7	180	36	10	850
	796137	7	180	60	10	955
	796138	7	180	80	10	955

FIBER DISC - ZIKONIKA

	PART NO.	Dia (Inch)	Dia (mm)	GRIT	Qty (Pcs)	MRP (INR)
Sander Disc - Fiber Disc - ZIKONIKA						
	796147	4	100	120	10	595
	796143	4	100	24	10	830
	796144	4	100	36	10	710
	796145	4	100	60	10	595
	796146	4	100	80	10	595

	PART NO.	Dia (Inch)	Dia (mm)	GRIT	Qty (Pcs)	MRP (INR)
Sander Disc - Fiber Disc - ZIKONIKA						
	796152	5	125	120	10	890
	796148	5	125	24	10	880
	796149	5	125	36	10	925
	796150	5	125	60	10	890
	796151	5	125	80	10	890

	PART NO.	Dia (Inch)	Dia (mm)	GRIT	Qty (Pcs)	MRP (INR)
Sander Disc - Fiber Disc - ZIKONIKA						
	796157	7	180	120	10	1,475
	796153	7	180	24	10	1,565
	796154	7	180	36	10	1,475
	796155	7	180	60	10	1,475
	796156	7	180	80	10	1,475

Flap / Fibre Discs



HiKOKI flap discs are synonymous with excellent abrasion of material. You will achieve your goal faster as a result and the disc will remain easy cutting and abrasive over its entire lifetime. The flap disc is the perfect tool for demanding grinding and surface treatment jobs, such as edge chamfering, light stock removal, deburring, rust removal and weld blending. The professional quality is suitable for rough and intermediate grinding in all fields of metalworking including stainless steel, steel, cast iron, and sheet steel. A high lamellar lining on fibre glass pad for excellent life-time and uniform grinding capacity. Cool and low vibration grinding for an optimal result and low noise level for comfortable grinding.


Flap Discs for use with angle grinders, for use in metal

  	PART NO.	Dia (Inch)	Dia (mm)	GRIT	Qty (Pcs)	MRP (INR)
Sander Disc - Fiber Disc - AI -OXIDE						
 	403040	4	100	36	10	390
	403041	4	100	60	10	390
	403042	4	100	80	10	390
	403043	4	100	120	10	390

- 1 Colour coding
- 2 Dimensions
- 3 Applications
- 4 Direction of usage
- 5 Item number
- 6 Safety recommendations



✓ DUAL-PURPOSE ✓ DURABLE ✓ SMOOTH & COOL

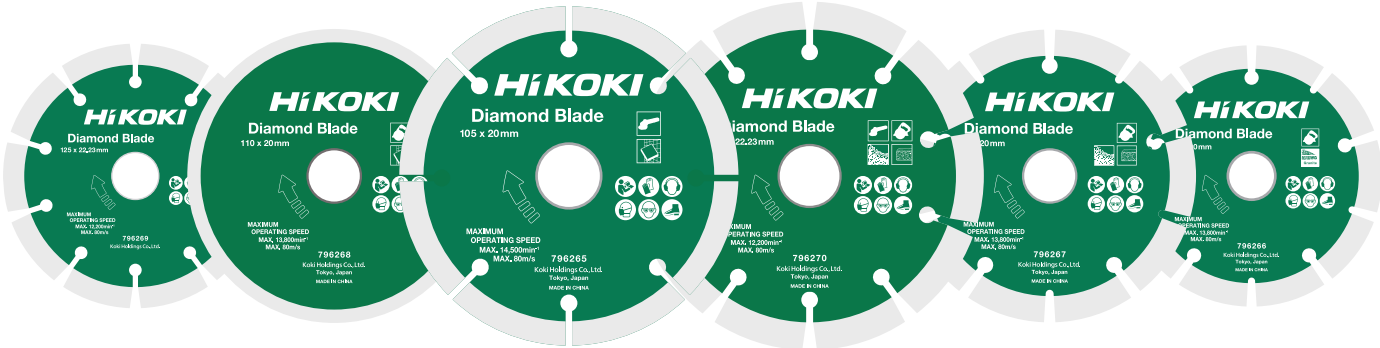

  	PART NO.	Dia X thick (mm)	No of Segments	Dia (Inch)	Qty (Pcs)	MRP (INR)
Diamond Blade - Rim & Segment						
 	NEW 796265	105 x 1.6	8	4	1	153
	NEW 796268	110 x 1.6	Rim	4	1	155
 	796265	796268				

  	PART NO.	Dia X thick (mm)	No of Segments	Dia (Inch)	Qty (Pcs)	MRP (INR)
Diamond Blade - Segment						
	NEW 796266	110 x 1.8	10	4	1	160
	NEW 796269	125 x 2.0	10	5	1	189
 	796266	796269				

   	PART NO.	Dia X thick (mm)	No of Segments	Dia (Inch)	Qty (Pcs)	MRP (INR)
Diamond Blade - Segment						
	NEW 796267	110 x 1.8	10	4	1	155
	NEW 796270	125 x 2.0	10	5	1	189
 	796267	796270				

   	PART NO.	Dia X thick (mm)	No of Segments	Dia (Inch)	Qty (Pcs)	MRP (INR)
Diamond Blade - Rim & Segment						
	796160	110 x 1.7	Rim	4	1	155
	796167	125 x 1.7	Rim	5	1	230
	796159	110x1.7	9	8	1	150
	796161	110x1.7	9	9	1	165
	796162	110x1.7	10	10	1	175
	796166	125x1.7	9	10	1	230
	752817	300x3.0	21	8	1	4,740

▪ Until stock last

Proline Circular Saw Blades

- 1 Number of teeth
- 2 Application in pictogram
- 3 Tooth setting
- 4 Maximum RPM
- 5 Production serial number
- 6 Blade dimensions
- 7 HiKOKI part number
- 8 Rotation direction
- 9 Safety advices



Good teeth make the difference
HiKOKI circular saw blades have been developed to make your work easier, with almost no vibration, good chip removal, low noise level and high precision. To meet these conditions, the circular saw blades have been designed and manufactured in a specific way.

Firstly the circular saw blades are made from hardened and tempered steel, tipped with high quality fine grain carbide. Blades for melamine and laminate are tipped with sub micron grain, blades for cement board with polycrystalline diamond and blades for inox with cermet teeth.

The expansion slots provide cooling and prevent excessive vibration and noise. This makes working with HiKOKI circular saw blades a much more pleasant experience.

Combined with extra attention to the material
The blade core for HiKOKI circular saw blades is laser cut. This gives the blade optimum accuracy and maximal flatness. The cutting surfaces of the teeth are extra large and brazed with an extremely hard alloy of silver, and copper for extra strength and a long service life. In addition the entire blade is given a special 3OC coating to prevent corrosion. The arbor hole is also laser cut to give the best machine fit.

HiKOKI circular saw blades	
Material:	High quality hardened and tempered steel
Sizes:	From Ø110 to 335 mm
Spindle holes:	From Ø16 to 30 mm
Teeth material:	Tungsten carbide cermet polycrystalline Diamond
Teeth type:	Trapezium teeth (TCG) Alternating teeth (ATB) Alternating + flat (FLR) Trapezoidal +flat (TR-F)
Usage:	All types of wood, laminate, aluminium, steel, stainless steel and abrasive for stationary and hand circular saws



SAW BLADE - TCT & GRINDING - WIRE BRUSH

  	PART NO.	Dia (mm)	Th (mm)	Bore (mm)	Teeths	(1 Pcs) MRP
Saw Blade - TCT						
	H394431 - Aluminium	255	2.7	25.4	100	2,000
	324269 - Aluminium	305	2.7	25.4	120	2,200
	402960 - Aluminium	355	3.0	25.4	80	3,600
	402961 - Wood	100	1.5	20	30	310
	401987 - Wood	100	1.5	20	40	330
	402962 - Wood	125	1.5	20	30	310
	401988 - Wood	125	1.5	20	40	370
	401569 - Wood	185	2.2	20	40	640

  	PART NO.	Dia (mm)	Th (mm)	Bore (mm)	Teeths	(10 Pcs) MRP
BLUE VALUE - Saw Blade - TCT						
	796258	110	1.5	20	12	2,180
	796249	110	1.5	20	30	2,500
	796250	110	1.5	20	40	2,900
	796259	125	1.5	20	12	2,500
	796251	125	1.5	20	30	2,950
	796252	125	1.5	20	40	3,200
Until stock last						

Grinding - Wire Brush

 	PART NO.	Dia (mm)	Nut Size	Qty (Pcs)	MRP (INR)
Grinding - Wire Brush					
	796163	65	M -10	1	350
	796164	65	M -14	1	350
 - Professional Series for light- to medium-duty cleaning applications. - The cup brush is also suitable for roughing, matt sanding and paint stripping. 796163					

ADAPTER - DRILL CHUCK




	PART NO.	Dia (mm)	Capacity	Mount	Qty (Pcs)	MRP (INR)
Keyed Drill Chuck - Rotary Mode only						
	401508	10	1.5 to 10	24	1	250
	401506	13	1.5 to 13	20	1	270
	- High precision thread for connection to Power tool - Reliable and durable connection - plated body for corossion protection - To be used only with Rotary mode - Hardened Jaws provide wear resistance					

ADAPTER - SDS-PLUS

	PART NO.	TYPE	Qty (Pcs)	MRP (INR)
Adapter - SDS-plus				
	402561	Chuck Adapter	1	180
	Until stock last			



 	PART NO.	Description	L (mm)	Qty (Pcs)	MRP (INR)
Driver Bit - Philips & Philips+Slotted					
	402770	Double end bit set PH2	65	10	600
	402771	Double end bit set PH2	110	10	980
	796253	Double end bit set PH2/SL6	65	10	395
	796254	Double end bit set PH2/SL6	110	10	165
 402771 Driver Bit					
BLUE VALUE					

 	PART NO.	Description	L (mm)	Qty (Pcs)	MRP (INR)
Driver Bit - Philips & Philips+Slotted					
	796255	Double end bit set PH2/PH2	65	100	3,950
		Candy Jar			
	796256	Double end bit set PH2/PH2	65	100	4,740
		Candy Jar			
	796257	Insert bit PH2	25	25	570
 796256 Driver Bit					
BLUE VALUE					

 	PART NO.	Description	L (mm)	Qty (Pcs)	MRP (INR)
Driver Bit - Philips & Philips+Slotted					
	796257	Insert bit PH2	25	25	570
 796257 Driver Bit					
BLUE VALUE					

Proline Flat Wood Drill Bits



WIDE RANGE
1/4" HEX. SHANK


All HiKOKI Flat Wood drill bits are manufactured in accordance with the strict HiKOKI standards from a high-quality carbon steel with which a high hardness is achieved. Thanks to the extra high-quality steel and hardness the HiKOKI flat wood drill can be used in all types of wood.

The head of the drill is equipped with three points, the center ensures precise

alignment while the outer points make the chip breaking and thus ensure an excellent finished end result. All HiKOKI flat wood drills are equipped with a 1/4" hexagonal connection according to ISO 1173 E6.3. Ideal for use on machines with bit connection for faster changing of drills and for having better grip in an ordinary drill chuck.


HiKOKI also offers interesting sets with a variety of diameters so that the most common sizes are readily available.

The range includes flat wood drills with a length of 152 mm.

   	PART NO.	Diameter (mm) A	Total Length (mm) B	Qty (Pcs)	MRP (INR)
Drill Bits - Wide Range 1/4" hex. shank					
	403019	6	152	1	100
	403020	8	152	1	100
	403021	10	152	1	105
	403022	12	152	1	110
	403023	12.5	152	1	110
	403024	13	152	1	110
	403025	14	152	1	120
	403026	15	152	1	120
	403027	16	152	1	120
	403028	18	152	1	130
	403029	20	152	1	140
	403030	22	152	1	160
	403031	24	152	1	165
	403032	25	152	1	165
	403033	26	152	1	185
	403034	28	152	1	205
	403035	30	152	1	220
	403036	32	152	1	240
	403037	34	152	1	250
	403038	35	152	1	260
	403039	36	152	1	270




PART NO.	Type & Size: (L) in (mm)	Qty (Pcs)	MRP (INR)
402144	Flat / 40x250 mm	1	200
401344	Bull Point / 250 mm	1	250
401347	Flat / 20x250 mm	1	245

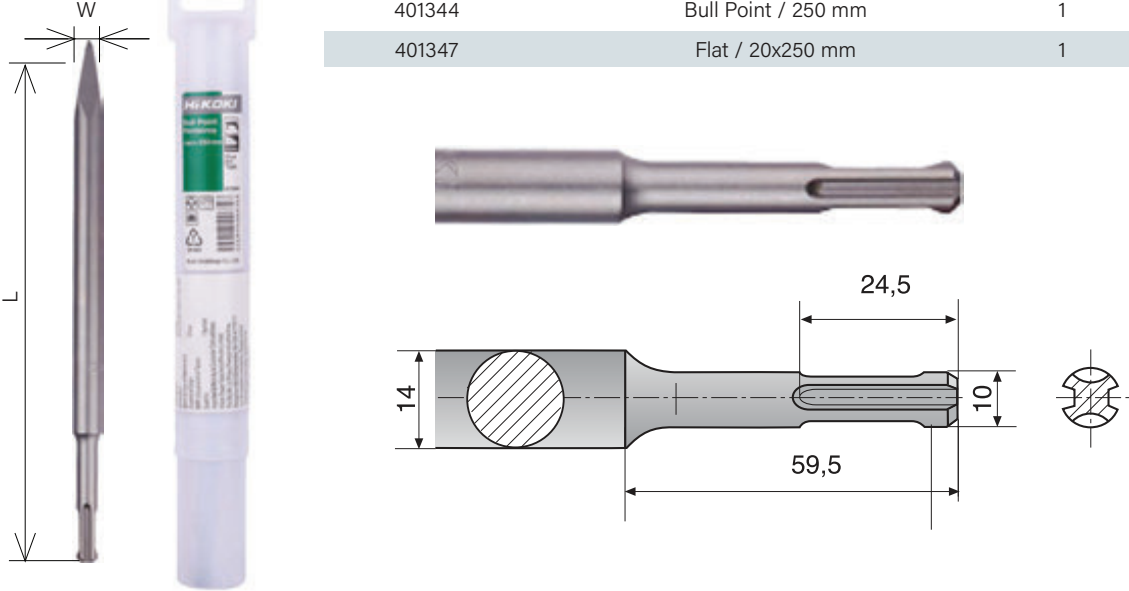

Technical drawings of SDS-PLUS chisels. The left diagram shows a side view with dimensions L (length) and W (width). The right diagram shows a cross-section with dimensions 14, 24,5, 59,5, and 10.




PART NO.	Type & Size: (L) in (mm)	Qty (Pcs)	MRP (INR)
401346	Bull Point / 400 mm	1	515
401349	Flat / 25x400 mm	1	510
402143	Bull Point / 600 mm	1	700

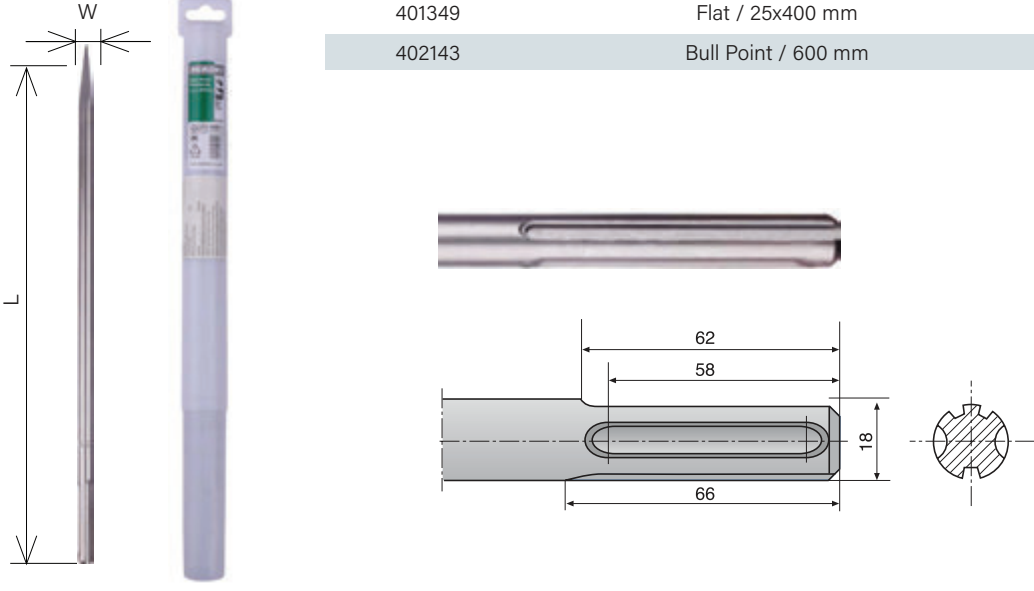

Technical drawings of SDS-MAX chisels. The left diagram shows a side view with dimensions L (length) and W (width). The right diagram shows a cross-section with dimensions 62, 58, 66, and 18.




PART NO.	Type & Size: (L) in (mm)	Qty (Pcs)	MRP (INR)
401030	Bull Point / 280 mm	1	310
401031	Bull Point / 450 mm	1	525
401037	Flat / 22x280 mm	1	350
401039	Flat / 19x450 mm	1	565

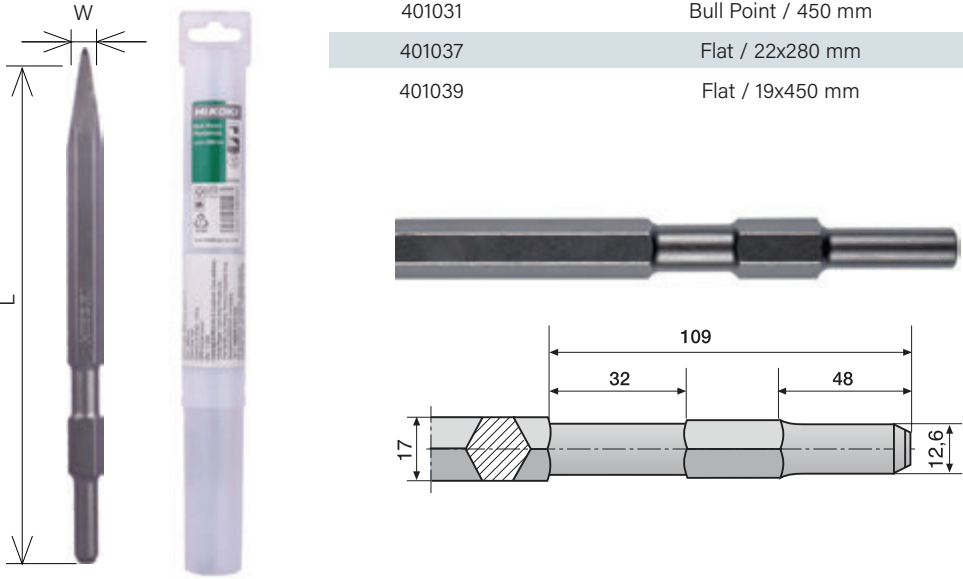

Technical drawings of HEX-17 chisels. The left diagram shows a side view with dimensions L (length) and W (width). The right diagram shows a cross-section with dimensions 109, 32, 48, 17, and 12,6.



PART NO.	Type & Size: (L) in (mm)	Qty (Pcs)	MRP (INR)
401036	Bull Point / 410 mm	1	1,490
401045	Flat / 35x410 mm	1	1,650

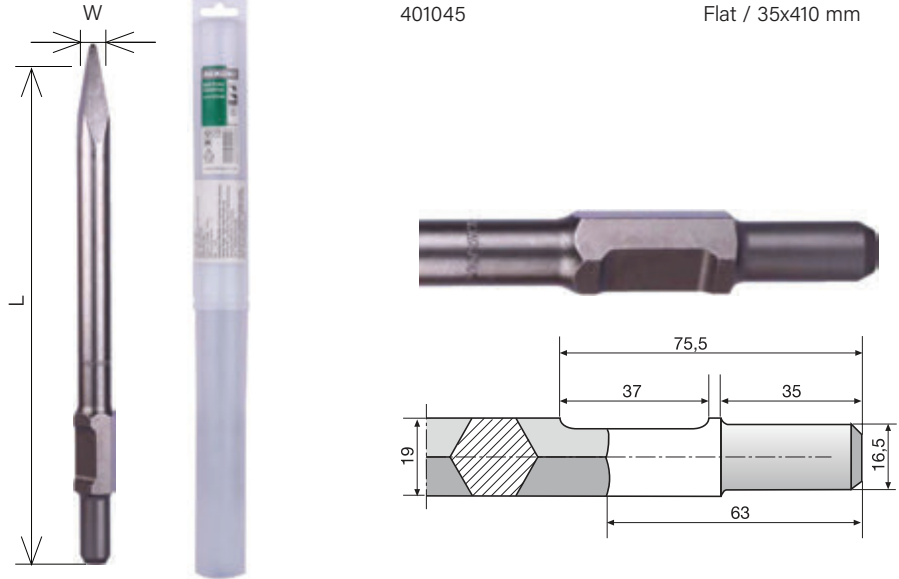


Technical drawings of HEX-30 chisels. The left diagram shows a side view with dimensions L (length) and W (width). The right diagram shows a cross-section with dimensions 75,5, 37, 35, 19, 63, and 16,5.



SDS Max Bit Type Shank

- Faster Drilling Into Concrete , Solid Bricks and Stonds with Tungsten Carbide Top.
- Great Cost Performance.

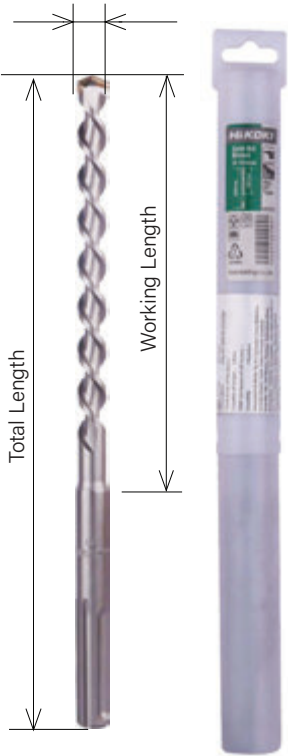  	PART NO.	Dia (mm)	Total Length (mm)	Qty (Pcs)	MRP (INR)
Chisels - HEX-17					
	401509	12	340	1	650
	401511	14	340	1	730
	401513	15	340	1	780
	401515	15	340	1	790
	401516	16	540	1	1,050
	401517	18	340	1	860
	401519	20	340	1	950
	401520	20	540	1	1,310
	401521	22	340	1	1,070
	401522	22	540	1	1,420
	401523	24	340	1	1,090
	401525	25	340	1	1,130
	401526	25	540	1	1,480
	401527	28	370	1	1,550
	401528	28	570	1	2,120
	401530	30	570	1	2,570
	401532	32	570	1	2,870
	401534	35	570	1	3,030
	401537	40	370	1	3,470
	401538	40	570	1	4,100

HAMMER DRILL BIT - SDS-PLUS x 2C

HiKOKI

  	PART NO.	Dia (mm)	Total Length (mm)	Qty (Pcs)	MRP (INR)
Hammer Drill Bit - SDS-PLUS x 2C					
	401005	5	110	1	75
	402695	5	160	1	80
	402696	5.5	110	1	75
	402697	5.5	160	1	80
	402996	6	210	1	105
	401006	6	110	1	75
	401007	6	160	1	75
	402566	6.5	110	1	80
	402567	6.5	160	1	90
	401914	7	110	1	80
	401915	7	160	1	90
	402997	8	210	1	121
	402998	8	260	1	126
	401008	8	110	1	85
	401009	8	160	1	90
	402999	10	260	1	141
	403000	10	310	1	160
	401989	10	210	1	120
	401010	10	110	1	90
	401011	10	160	1	100
	403001	12	260	1	140
	403002	12	350	1	198
	401339	12	210	1	135
	401013	12	460	1	250
	401012	12	160	1	110
	402568	13	160	1	150
	402569	13	210	1	180
	403003	14	260	1	220
	403004	14	350	1	270
	401015	14	460	1	320
	401014	14	160	1	155
	401016	15	160	1	430
	403005	16	260	1	250
	403006	16	350	1	320
	401341	16	210	1	220
	401017	16	460	1	420
	401340	16	160	1	190
	403007	18	350	1	385
	401018	18	210	1	270
	401019	18	310	1	360
	401020	18	460	1	460

HAMMER DRILL BIT - SDS-PLUS X 2C

Cordless
Chargers/ Batteries
Drilling
Demolition
Fastening
Grinding
Polishing & Sanding
Sawing
Cutting
Planing & Routing
Miscellaneous Pneumatic
E - Tech Line
Accessories

  	PART NO.	Dia (mm)	Total Length (mm)	Qty (Pcs)	MRP (INR)
Hammer Drill Bit - SDS-PLUS x 2C					
	401021	20	210	1	350
	401022	20	510	1	450
	401023	20	460	1	580
	401024	22	260	1	460
	401025	22	460	1	770
	401026	25	260	1	600
	401342	25	350	1	700
	401027	25	460	1	800
	401028	26	260	1	600
	401029	26	460	1	900
	750102	5	160	1	250
	750105	6	110	1	230
	750106	6	160	1	240
	750109	7	160	1	270
	750110	7	160	1	300
	750111	8	110	1	270
	750112	8	160	1	280
	750113	6	210	1	340
	750118	10	110	1	320
	750119	10	160	1	325
	750120	10	210	1	390
	750126	12	160	1	388
	750127	12	210	1	465
	750129	12	300	1	670
	750130	12	460	1	1,120
	750133	14	160	1	545
	750139	16	160	1	700
	750142	16	460	1	1,630
	750143	18	210	1	1,305
	750150	20	300	1	1,930
	750153	22	260	1	2,195
	750155	24	260	1	2,350
	750158	25	460	1	3,125
					



Designed for Performance

ø2mm - ø13mm

- HIGH SPEED STEEL
- UNMATCHED DURABILITY
- VERSATILE APPLICATION
- SMOOTH DRILLING EXPERIENCE



HSS-G		PART NO.	Dia A (mm)	Total Length B (mm)	Qty (Pcs)	MRP (INR)
Hammer Drill Bit - For Metal						
	401177Z	2.0	49	10	160	
	401182Z	2.5	57	10	195	
	401187Z	3.0	61	10	240	
	401189Z	3.2	65	10	250	
	401192Z	3.5	70	10	255	
	401197Z	4.0	75	10	295	
	401202Z	4.5	80	10	399	
	401207Z	5.0	86	10	475	
	401212Z	5.5	93	10	548	
	401217Z	6.0	93	10	675	
	401222Z	6.5	101	10	787	
	401227Z	7.0	109	10	894	
	401232Z	7.5	109	10	992	
	401237Z	8.0	117	10	1,207	
	401242Z	8.5	117	10	1,318	
	401247Z	9.0	125	5	774	
	401257Z	10.0	133	5	954	
	401262Z	10.5	133	5	855	
	401267Z	11.0	142	5	970	
	401277Z	12.0	151	5	1,200	
	401282Z	12.5	151	5	1,315	
	401287Z	13.0	151	5	1,430	



Notes

This image shows a single sheet of white paper with horizontal green ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Notes

[illegible]



Head Quarters:

Koki Holdings Co., Ltd.

Shinagawa intercity Tower A, 20th Floor, 15-1
Konan 2-chrome, Minato-ku, Tokyo 108-6020
Japan.

Tel; +81-3-5783-0601

Fax: +81-3-5783-0709

Website: www.hikoki-powertools.com

Registered & Head Office:

HiKOKI Power Tools India Pvt. Ltd.

9th Floor, Aspen Block G4, Embassy Manyata Business Park,
Outer Ring Road, Nagavara, Bengaluru, India - 560045

Tel: 080 - 4117 0777/78 / 2839 6198

Email: in-kfi-customer@koki-group.com

Website: www.hikoki-powertools.in

Manufacturing Unit:

HiKOKI Power Tools India Pvt. Ltd.

TP 2/1, Cyber pearl IT park, Mahindra World City,
Thenmelpakkam, Veerapuram, Chengalpattu,
Tamil Nadu, India - 603002

Sales Enquiries

Ahmedabad : 90999 20372
Bangalore : 90083 04461
Bhubaneshwar : 98360 92333
Chennai : 99620 92519
Cochin : 95677 61040
Delhi : 97111 92658
Gurgaon : 97111 92658
Guwahati : 98360 92333

Hyderabad : 96520 00363
Jaipur : 88240 99593
Kolkata : 98311 60116
Lucknow : 90267 53265
Ludhiana : 76250 01093
MPCG : 80506 07519
Mumbai : 75960 26989
Pune : 97027 86342



Service Support

Karnataka

Kerala

Maharashtra, Madhya Pradesh

Punjab, Himachal Pradesh, Jammu and Kashmir

Rajasthan, Gujarat

West Bengal, Odisha, Bihar, Jharkhand, Chattisgarh

Tamil Nadu, Karnataka

Uttar Pradesh, Delhi, Haryana, Uttarakhand, Telangana, Andhra Pradesh

Head Office

98800 09324

95677 61031

97027 86343

81974 68493

90999 70986

98303 22555

96866 22330

81971 93575

97400 27744

FOLLOW US ON



FACEBOOK



INSTAGRAM



LINKEDIN

MAKE. MOVE. GO