



Benefits

- High efficacy up to 160lm/w
- Flicker-free
- Compatible with main supply
- Bright and comfortable

Application




Model	Item Description	W	PF	lm	lm/W	CRI	Beam	Temp	Single Box (LxWxH)mm	Outer Box (LxWxH)mm	Packing Qty (PCS/CTN)
T5G1-ML-2FT-7.5W-4000K	PROV2 T5 7.5W G5 4000K 2FT	7.5	0.9	1200	160	>80	180°	55000	/	602*168*162	20
T5G1-ML-2FT-7.5W-6500K	PROV2 T5 7.5W G5 6500K 2FT	7.5	0.9	1200	160	>80	180°	55000	/	602*168*162	20
T5G1-ML-4FT-16W-4000K	PROV2 T5 16W G5 4000K 4FT	16	0.9	2560	160	>80	180°	55000	/	1202*168*162	20
T5G1-ML-4FT-16W-6500K	PROV2 T5 16W G5 6500K 4FT	16	0.9	2560	160	>80	180°	55000	/	1202*168*162	20


Application Conditions	
IP	IP20
Operating Temperature	-20~45°C
Application Temperature	25°C
Storage Environment	-25~50°C

Mechanical Properties	
Optical Material	Glass
Housing Material	PC
Finishing Colour	White

Electrical Supply	
Frequency (Hz)	50/60
Voltage (V)	220-240
AC/DC	AC

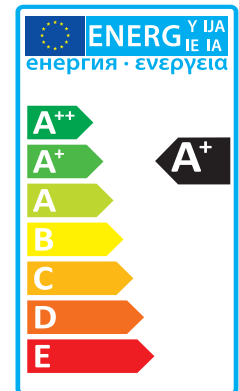

Photometric Data



Dimensional Drawing

