

REL10NM-CY

SURFACE LED

NON-MAINTAINED SURFACE MOUNT CYLINDRICAL EMERGENCY LUMINAIRE



TECHNICAL SPECIFICATIONS

MODEL NO:	REL10NM-CY
Mode of Operation:	Non-Maintained
Lamp:	6W White LED
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	<0.5W
Battery:	High Temperature Lithium LiFePO4
Charger:	Constant Current/Constant Voltage, Short circuit protected
Charge Monitor:	LED
Test Facility:	Momentary Test Switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Injection moulded with fire retardant (UL94), high impact PC material
Weight:	Approx. 0.4kg
Standards / Compliance:	SS IEC 60598-2-22, SS 563, CB, IEC 61347-2-7, IEC 61347-2-13, IEC 62384, IEC 60598-1


***Note: Technical Specification subject to change without prior notice

Ordering Guide:

Ordering Code

REL10NM-CY

- Quick fit, cylindrical design for fast installation and maintenance.
- Long life, environmental friendly Lithium Iron Phosphate (LiFePO4) battery.
- Low Heat generation, ensures long and reliable service life.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge.
- Charge LED indicator and test switch
- Optimal for anti-panic (open area) and escape route lighting applications.
- High Quality, Long Life LED module.
- Energy savings, extra low standby power consumption.
- Surface mount
- Maximum Efficiency and perfect light distribution that result to very wide spacing thus lesser number of emergency luminaires are needed in conformity with relevant standards.

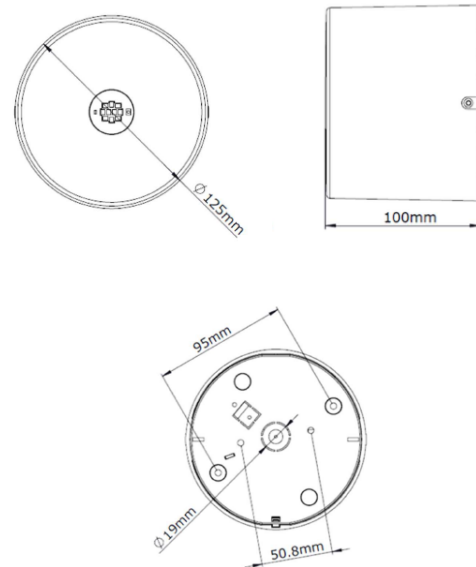

CLASS II



PSB Singapore

CE

CB



Type and batch tested with PSB PLS-LISTED LABEL