


FLEXIBLE LED CHART TABLE LIGHT



CL55A SERIES



Applications

Bridge, Cabins

Materials

Anodized aluminum body

Protection Class

IP20

Options


With red diffuser

Weight

0.216Kg

Key Features

- 53cm long flexible gooseneck
- High quality CREE XP-G LED light source
- 3-step dimming
- Push-pull focusing lens
- Wall mount or desk mount
- Long LED L70 lifespan of 60,000 hours
- Vibration-resistant
- USB Type-C power input (adaptor included)
- EMC safety compliance to EN 55015, EN 61547, EN 61000-3-2 and EN 61000-3-3 standards

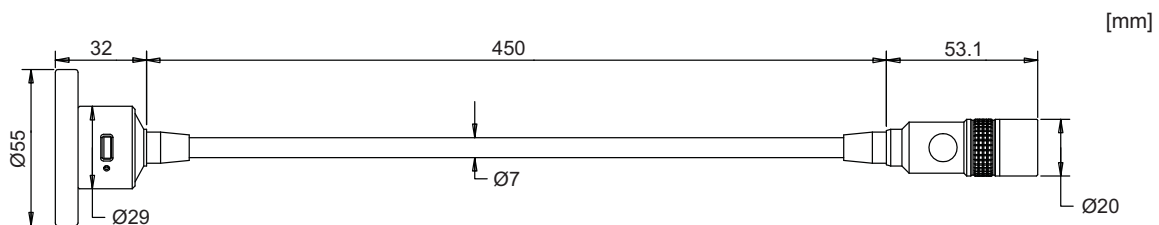

TECHNICAL SPECIFICATIONS

IP 20

BH Code	Type	Main Voltage	Power	CCT	Ambient Temp (Ta)	System Lumen
LACL55A	CL55A	100V - 240V AC	2W	6500K	-20°C ~ + 40°C	200lm

DIMMING SETTINGS

Brightness level	100%	60%	30%
Lumens output	200lm	120lm	60lm

*Half-press button to toggle dimming levels. Full-press button to turn On/Off.