


TECHNICAL SPECIFICATIONS FOR TYPE J 2000-592.14/380-400V/50HZ

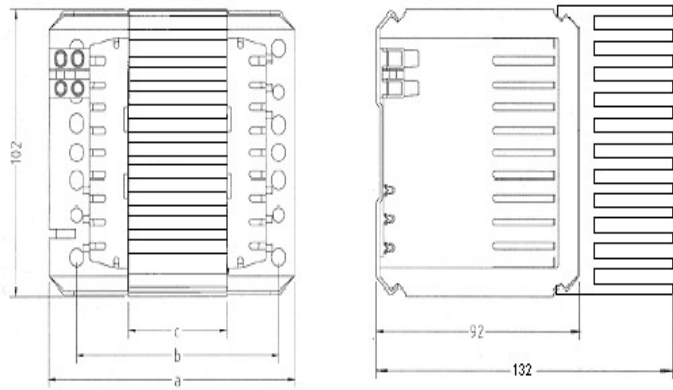

J2000.592.14

J2000.592.14Z

Electromagnetic Ballasts for M.Halide lamps.

Shape 92x102mm

Vacuum impregnated with polyester resin

Screw terminals: 2,5 mm²

tw 130, Protection class I

ISO 9001/2008

EN 61347-1:2015, EN 61347-2-9:2013, EN 60923:2005,

EN60923:2005/A1:2006

IEC 61347 (Safety)



IEC 62384 (Working Method)

Quality Control System : ISO 9001 + ISO 14001

Capacitor: 60Mf/400V

Ballasts for Metal Halide Lamps (380-400V/ 50Hz)

BALLAST	LAMP		Nominal Current	Cos φ	TEMPERATURE		DIMENSIONS				
	TYPE	POWER			tw	Δt	A	B	C	W	H
J2000.592.14Z	HI	2000W	7.5 A	0,52	130°C	75	248 mm	233 mm	185 mm	102 mm	132 mm
J2000-592.14Z	HI	2000W	8.8A	0.52	130°C	75	248 mm	233 mm	185 mm	102 mm	132 mm
J2000-592.14Z	HI	2000W	10,3A	0,52	130°C	75	248 mm	233 mm	185 mm	102 mm	132 mm
J2000-592.14Z	HI	2000W	11,3A	0,52	130°C	75	248 mm	233 mm	185 mm	102 mm	132 mm
J2000-592.14Z	HI	2000W	12,2A	0,52	130°C	75	248 mm	233 mm	185 mm	102 mm	132 mm