

## HMI 575 W/DXS

### HMI Double End Lamps



---

#### Areas of application

- Studio, TV, & Film
- Professional & High Speed Photography
- Solar Simulation

---

#### Product features and benefits

- High intensity light providing true color performance with CRI up to 90
- Color temperature approximately 6000 K - simulates daylight
- Robust design provides durability during transport
- High energy efficiency providing up to 100 lumens/watt
- Capable of hot restrike ignition
- Compression sealed base provides enhanced durability
- High energy efficiency providing up to 100 lm/W
- Broad spectrum suitable for solar simulation applications



## Product datasheet

### Technical data

#### General Product Information

Product number (Americas)	54313
Product name (Americas)	HMI 575W/DXS 10/CS 1/SKU
Family brand	HMI
Lamp type	DOUBLE ENDED
Global order reference	HMI 575 W/DXS


#### Electrical Data

Nominal wattage	575 W
Nominal voltage	95 V
Nominal current	7 A
Type of current	AC

#### Photometric Data

Nominal luminous flux	49000 lm
Color temperature	6000 K
Color rendering index Ra	90
Luminous efficacy	85 lm/W

#### Physical Attributes & Dimensions

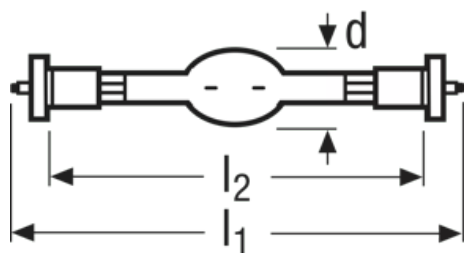

Diameter (in)	0.827 in
Diameter	21.0 mm
Length	135.0 mm
Length with base excl. base pins/connection	115.00 mm
Product weight	33.00 g
Lamp base	SFc10-4

## Product datasheet

### Operating Conditions

Burning position	Any
------------------	-----

### Lifetime Data

Nominal lifetime	1000 hr
------------------	---------

### Environmental & Regulatory Information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Primary article identifier	4008321285102
Declaration no. in SCIP database	No declarable substances contained
Candidate list substance 1	No declarable substances contained

### Country specific information

Product code	METEL code	SEG-No.	STK number	UK Org
4008321285102	OSRHMI575DXS	-	4836416	-

## Product datasheet

---

### Safety advice

Because of their high luminance, UV radiation and high internal pressure during operation, HMI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321285102	HMI 575 W/DXS	Shipping carton box 1	245 mm x 59 mm x 100 mm	1.45 dm <sup>3</sup>	148.00 g
4008321285119	HMI 575 W/DXS		- x - x -	16.85 dm <sup>3</sup>	

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.