




26.422.1313.50

Linear Fluorescent Lampholders: General Applications
G13 (Medium Bi-Pin): End Mount Lampholders

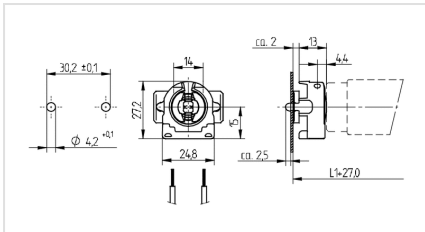

Color: weiß
Open text field 2: 50
Part no.: 26.422.1313.50

18 AWG 0,5 - 1,0 mm² 90° U out 500 V T 130 Tm110 0,5 - 1,1 18 AWG 0,5 - 1,0 mm²

Description

- Wide spring
- - One lampholder with leaf spring provides a lamp length tolerance compensation of 2 mm
- - cULus: File E-92235

Product name:	Lampholder
Symbol 1drähtige Leitungen:	0,5-1,0 mm ²
Farbe:	weiß
Mounting method 1:	Snap-in pins with spring
Material:	Gehäuse: PC Rotor: PBT
Lamp type:	50 MASTER TL-O SUPER 80 36 W-1/8., BASIC T8, BASICL18W/20, BASICL36W/20, BASICL58W/20, Bonalux G13, F18W/..., F18W/125-ST, F18W/129-ST, F18W/133-ST, F18W/154-ST, F18W/25, F18W/54, F18W/8.. LUXUNE plus, F18W/8..Polylux XL, F18W/860 LUXLINE plus, F18W/860 Polylux XL, F18W/9..Polylux Deluxe, F30W/..., F30W/54, F30W/8..LUXUNE plus, F30W/8..PolyluxXL, F30W/860 LUXUNE plus, F30W/CW/133, F30W/D/154, F30W/T8/WW/129, F36W/..., F36W/125-ST, F36W/129-ST, F36W/133-ST, F36W/154-ST, F36W/25, F36W/54, F36W/8.. LUXLINE plus, F36W/8..Polylux XL, F36W/860 LUXLINE plus, F36W/860 Polylux XL, F36W/9..Polylux Deluxe, F36WM/25, F36WM/33, F36WM/54, F58/54, F58W/..., F58W/125-ST, F58W/129-ST, F58W/133-ST, F58W/154-ST, F58W/25, F58W/8.. Polylux XL, F58W/8..LUXUNE plus, F58W/860 Polylux XL, F58W/860LUXUNE plus, F58W/9..Polylux Deluxe, G13, IUM.DE L. BIOLUXL30W/965, LUM.DEL.BIOI.UX L W/965, LUM.DELBIOLUXL36W/965, LUM1LUXL58W/8.., LUMHJUXL36W/860, LUMIL- DE L. BIOLUX L 18 W/965, LUMILUX DE LUXE L30W/930, LUMILUX T8, LUMILUXD6LUXEL36W/9..., LUMILUXDELUXEL18W/9..., LUMILUXDELUXEL36W/950, LUMILUXDEUXEL58W/9..., LUMILUXL18W/8.., LUMILUXL30W/8.., LUMILUXL30W860 MA, LUMILUXL36W/8.., LUMILUXL36W/8..-1, LUMILUXL58W/860, LUMIUUXL18W/860, Master TL-D, MASTER TL-D SUPER 80 36 W/8..., MASTER TL-D SUPER 80 58 W/8..., MASTER TL-D SUPER 8018 W/8..., MASTER TL-O SUPER 80 30 W/8..., MASTER TL-O SUPER 80 30 W/865, Spectralux G13, Spectralux Plus G13, T12 - IRS, T12 - Reflektor, T12 - Standard, T12 Polylux, T12 Standard, T8 Cov-R-Guard, T8 Luxline, T8 Polylux, T8 Standard, TL-018W/..., TL-018W/54, TL-018W/9..deLuxe, TL-030W/29, TL-030W/33, TL-D 30 W/..., TL-D 36 W/..., TL-D 58 W/..., TL-D18W/25, TL-D18W/33, TL-D18W/965deLuxe, TL-D30W/25, TL-D30W/54, TL-D30W/9..deLuxe, TL-D30W/965deLuxe, TL-D36W/25, TL-D36W/33, TL-D36W/54, TL-D36W/9..deLuxe, TL-D36W/965deLuxe, TL-D58W/25, TL-D58W/33, TL-D58W/54, TL-D58W/9..deLuxe, TL-D58W/965deLuxe, TL-M, TL-M RS, TL-RS
Lamp type:	Leuchtstofflampen
Body thickness:	13
Weight:	8
Approval:	cULus
Material thickness:	0.5 - 1.1
Wiring:	through the body
Pkg.:	500