

MASTER SON-T PIA Plus

MASTER SON-T PIA Plus 400W/220 E40 1SL

High Pressure Sodium lamp with clear tubular outer bulb, high output and long reliable lifetime

Product data

• General Characteristics

System Description	External Ignitor
Cap-Base	GES [GES]
Cap-Base Information	-
Bulb	T46 [T 46mm]
Bulb Finish	Clear
Burning Position	any [Any/Universal]
Life to 5% failures	20500 hr
Life to 10% failures	24000 hr
Life to 20% failures	28000 hr
Life to 50% failures	36000 hr
LSF EM 2000h Rated, 12h cycle	100 %
LSF EM 4000h Rated, 12h cycle	99 %
LSF EM 6000h Rated, 12h cycle	99 %
LSF EM 8000h Rated, 12h cycle	99 %
LSF EM 12000h Rated, 12h cycle	99 %
LSF EM 16000h Rated, 12h cycle	98 %
LSF EM 20000h Rated, 12h cycle	95 %

• Light Technical Characteristics

Colour Code	220 [CCT of 2000K]
Colour Rendering Index	25 (max) Ra8
Colour Temperature	2000 K
Luminous Flux EM 25°C, Rated	55800 Lm
Lum Efficacy Rated EM 25°C	137 Lm/W

Lumen Maintenance 2000h	99 %
Lumen Maintenance 5000h	96.5 %
Lumen Maintenance 20000h	88 %
Average Luminance EM	680 cd/cm ²
LLMF EM 2000h Rated	99 %
LLMF EM 4000h Rated	97 %
LLMF EM 6000h Rated	96 %
LLMF EM 8000h Rated	94 %
LLMF EM 12000h Rated	92 %
LLMF EM 16000h Rated	90 %
LLMF EM 20000h Rated	88 %
Chromaticity Coordinate X	525 -
Chromaticity Coordinate Y	425 -

• Electrical Characteristics

Lamp Wattage	400 W
Lamp Wattage EM 25°C, Nominal	400.0 W
Lamp Wattage EM 25°C, Rated	400.0 W
Voltage	230 V
Lamp Voltage	100 V
Lamp Current EM	4.5 A

PHILIPS

MASTER SON-T PIA Plus

Ignition Time	10 (max) s
Run-up time 90%	5 (max) min
Dimmable	yes
Re-ignition Time [sec]	120 (max) s
Ratio scotopic/photopic lumens	0.60 -

• Environmental Characteristics

Energy Efficiency Label (EEL)	A++
Mercury (Hg) Content	20 mg
Energy consumption kWh/1000h	440 kWh

• Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Bulb Temperature	450 (max) C

• Product Dimensions

Overall Length C	283 (max) mm
------------------	--------------

Diameter D	48 (max) mm
Light Center Length L	175 mm
Arc Length O	83 mm



• Product Data

Order code	179883 15
Full product code	871150017988315
Full product name	MASTER SON-T PIA Plus 400W E E40 1SL
Order product name	MST SON-T PIA Plus 400W E E40 1SL/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500179883
Bar code on outerbox - EAN3	8711500182951
Logistic code(s) - 12NC	928144809227
ILCOS code	ST-400-H/E-E40
Net weight per piece	0.180 kg

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)

Dimensional drawing


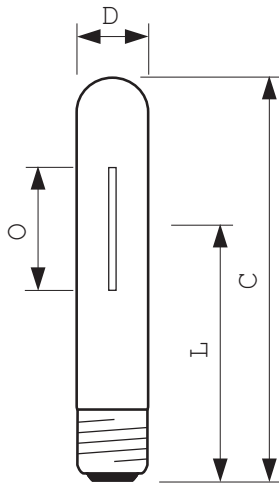


E40

MASTER SON-T PIA Plus 400W/220 E40 1SL

Product	C (Max)	D (Max)	L (Norm)	O (Norm)
SON-T Plus 400W/220 E40	283	48	175	83

Photometric data

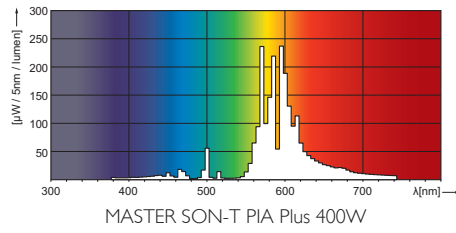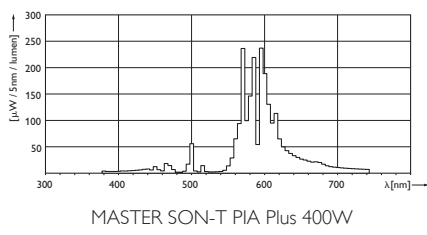

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 1
data subject to change