



Semi-deep Recessed Family

RS280 G2 RC Rd D75 11W 40K 24D

Semi-deep Recessed Family, 11 W, 1000 lm, 4000 K, Metallic grey

Bring superiority lighting effect together with low glare performance. Slim design with fit for majority of the installation requirement. 8mm trim can blend into the all kinds of the home deco style.

Product data

General Information	
Light source replaceable	No
Driver included	Yes
Warranty period	1 years

Light Technical	
Luminous Flux	1,000 lm
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	90 lm/W
Color rendering index (CRI)	90
Light source color	940 neutral white
Luminaire light beam spread	24°
Unified glare rating CEN	13

Operating and Electrical	
Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Inrush current	12 A

Power Consumption	
Power Consumption	11 W
Power Factor (Fraction)	0.5
Connection	Flying leads/wires
Number of products on MCB of 16 A type B	88
Protection class IEC	Safety class II

Controls and Dimming	
Dimmable	No
Constant light output	No


Mechanical and Housing	
Housing Material	Plastic
Reflector material	-
Housing Color	Metallic grey
Overall height	77 mm
Overall diameter	85 mm
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK03 [0.35 J reinforced]

Semi-deep Recessed Family



Net Weight (Piece)	0.176 kg
Approval and Application	
Insulation Coverage Rating	Non IC Rating
Flammability mark	For mounting on normally flammable surfaces
EU RoHS compliant	Yes
Ambient temperature range	-20 to +40 °C
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.3778, 0.3636) 5SDCM
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Median useful life L70B50	25,000 hour(s)

Product Data	
Order product name	RS280 G2 RC Rd D75 11W 40K 24D
Full product name	RS280 G2 RC Rd D75 11W 40K 24D
Full product code	694197061754300
Order code	929004120110
Material Nr. (12NC)	929004120110
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	6941970617543
Numerator - Packs per outer box	12
EAN/UPC - Case	6941970617550

Dimensional drawing

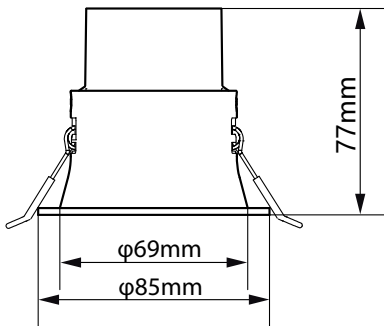

Photometric data

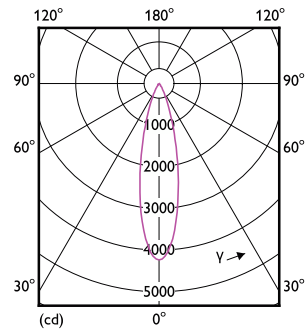

Accent Lighting Spots - RS280 G2 RC Rd D75 11W 40K 24D

Light Distribution Diagram - RS280 G2 RC Rd D75 11W 40K 24D

Semi-deep Recessed Family

